EDHL - Lübeck Airport

- Overview
- Apron
- Tower

Overview

Before staffing this airport for the first time:

Obtain a successful grade at the self enrollment Moodle course: EDHL - Lübeck-

Blankensee Tower.

Lübeck Airport is located 8km south of Lübeck inside the Hamburg Metropolitan region.

Main Operations

Lübeck Air	München, Stuttgart, Salzburg, Bergen, Sälen ATR72 und Dassault Falcon 7X from Air Alsie, E190 from German Wings
SundAir	Heraklion, Palma de Mallorca, Antalya, Corfu (A320 Family)
STS/HOSP	Medical Flights (Transplantationsklinik) Piper Senecas, Cessna Golden Eagle, etc.
Lufthansa Aviation Training (LAT)	Daily Training Flights for various air works and approach trainings PA28, C172, SR22 (with normal Reg-Callsigns, not Rookie)

Lübeck ATC Stations

Station	Station ID	Login	Frequency	Remark
ATIS	AHL	EDHL_ATIS	119.930	
Ground	HLG	EDHL_GND	121.780	
Tower	HLT	EDHL_TWR	128.705	
Arrival	HAME	EDDH_E_APP	119.510	

General Information

EDHL is an unrestricted airport of the **Bremen FIR** and part of the S1 minor program. Controllers on the vACC Germany Controller Roster are allowed to control at this Airport with their S2 or higher rating after checking these Standard Operational Procedures and obtaining a successful grade at

the respective Moodle course: **EDHL - Lübeck-Blankensee Tower**.

Tower position does not have to track aircrafts.

Approach Procedures

Runway	ILS CAT I	ILS CAT II	LOC	RNP	NDB
07	✓	✓	√	✓	✓
25	✓		✓	✓	✓

Quicksheet



EDHL Quicksheet

AIRAC: 2411, 31.10.2024

STANDARD INSTRUMENT DEPARTURE (SID)						
SID RWY	HAM RAMAR LUGEG					
07	1A	1A	1A			
25	1K	1K	1K			
APP	EDDH_E_APP					

APPROACH					
RWY	07	25			
TYPE	ILS	ILS			
FREQ	109.35	111.70			
CRS	069°	249°			
IDENT	ILUE	ILUW			
FAP	BITMA	ROXEM			

COMMUNICATION						
STATION	STATION LOGIN FREQ CALLSIGN					
ATIS	EDHL_ATI\$	119.930	AHL	Lübeck ATIS		
GND/ DEL	EDHL_GND	121.780	HLG	Lübeck Ground		
TWR	EDHL_TWR	128.705	HLT	Lübeck Tower		
	EDDH_E_APP	119.510	HAME	Bremen Radar		
АРР	EDDH_W_APP	134.255	HAMW	Bremen Radar		
	EDDH_F_APP	118.205	DHAT	Hamburg Director		
	EDWW_A_CTR	126.325	ALR	Bremen Radar		
	EDWW_E_CTR	124.075	EIDE	Bremen Radar		
CTR	EDWW_H_CTR	125.855	HEI	Bremen Radar		
	EDWW_W_CTR	120.225	EIDW	Bremen Radar		
	EDWW CTR	133.725	WC	Bremen Radar		

C.	ТΛ	I
•	•	v

STAR	BOGMU	NOLGO	RARUP
25*	1R	1R	1R
07	1V	1V	1V
LVL AT		FL 110	

^{*} STARs for RWY 25 ending at HL165 (IAF)

HOLDINGS

WAYPOINT	LYE	RARUP	NOLGO	BOGMU	HL165
APP	E_APP	E_APP	E_APP	E_APP	E_APP
ALT	3000	FL110	FL110	FL110	3500
COURSE	339°	276°	005°	229°	249°

VFR PROCEDURES


VISUAL REP POINT	NOVEMBER	SIERRA 1	SIERRA 2*	LIMA	WHISKEY
DIRECTION	N	S	SE	E	NW
PART OF RTE	NOVEMBER	SIERRA	SIERRA	LIMA	WHISKEY
MAX ALT			2000		

^{*} SIERRA 2 is a reporting point (no positionreport)

Apron

Lübeck Airport can be staffed with an apron controller, who is providing Delivery Service as well. This is VATSIM specific and not real-life procedure.

The Apron Controller is responsible for all movements on aprons only. Taxiways A-D belong to the Tower. Holding Lines are directly at the outer limit of the Apron Area.

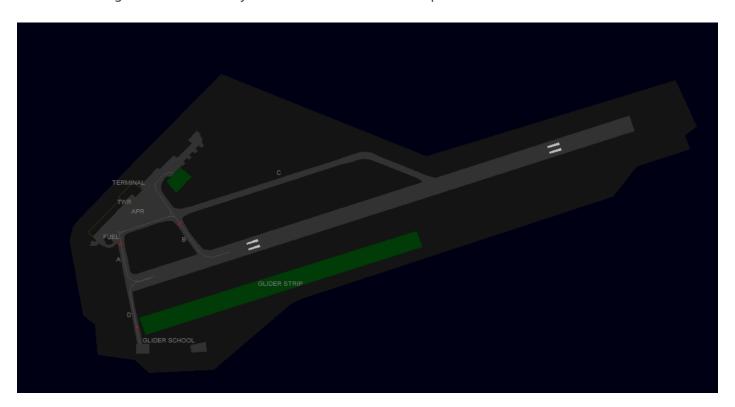

Parking

Terminal: Lübeck features one terminal building at the center part of the Airport with Hangars left and right.

Airliner Stands: On the main apron in front of the terminal building.

Business Jets: If they are small enough, Business Aviation parks directly in front of Hangars E and G (north of the grass GA Apron) or at the main apron.

General Aviation: The GA Apron is a marked grass field north of Taxiway B and is called "*Parking Area GAT*". It is suitable for Echo-Class aircrafts up to 2.000kg TOW. Additional space is in front of and at the round halls north-east of the GA Apron (R1 - R4). The Fuel station is west of A on Apron 1.

Helicopters: Lübeck has no Helipads. Helicopters use the runway for all operations and can park at a designated parking area between Hangar E and G, north of the GA Apron.

Glider School: South of the main runway with own parking area next to the Glider Strip.

Taxiways

The main taxiways A-C are suitable for Class C aircrafts. Class D not yet confirmed.

Delivery

VATSIM has the Top-Down principle, therefore IFR Clearances shall be given by the Apron (or Tower), contrary to real-life procedures, where these are given by Bremen Radar. Delivery Service is responsible for all departing flights under IFR.

Initial climb clearance: The initial climb clearance at Lübeck Airport is 5000ft on all published departure procedures. The altitude shall be entered as cleared altitude (CFL) in an appropriate list or tag.

SIDs

SID	07	25	Climb
HAM HAMBURG	1A	1K	5000ft
LUGEG	1A	1K	5000ft
RAMAR	1A	1K	5000ft

Except HAM1K out of Runway 25 all other SIDs have Climb or Speed restrictions, where the phrase "via SID" shall be used.

Specials

Vectored departures: The use of vectored departures requires prior coordination with the responsible radar station. An initial altitude to climb shall be provided.

IFR local flights: IFR local flights are coordinated with the responsible radar controller, who may instruct a different departure procedure, possibly vectored departures.


Low Visibility Operations (LVO)

During Low Visibility Operations, Taxiway A shall be used for departing and arriving traffic exclusively. Arriving traffic needs to perform a backtrack in this case. Apron shall only issue a taxi clearance to the holding point after explicit release from Tower to avoid nose-to-nose situations with between arriving and departing traffic.

During LVO, Lübeck Apron shall clear departing traffic to the CAT II holding point of taxiway A.

Tower

Lübeck Tower is responsible for all arriving and departing traffic. The top level of the airspace D control zone is 2000ft MSL. Above this altitude and around the CTR airspace E covers the area within responsibility of Bremen Radar (Hamburg Approach). South-East of the field is a nature reserve area (Schaalsee), which shall be avoided below 2000ft.

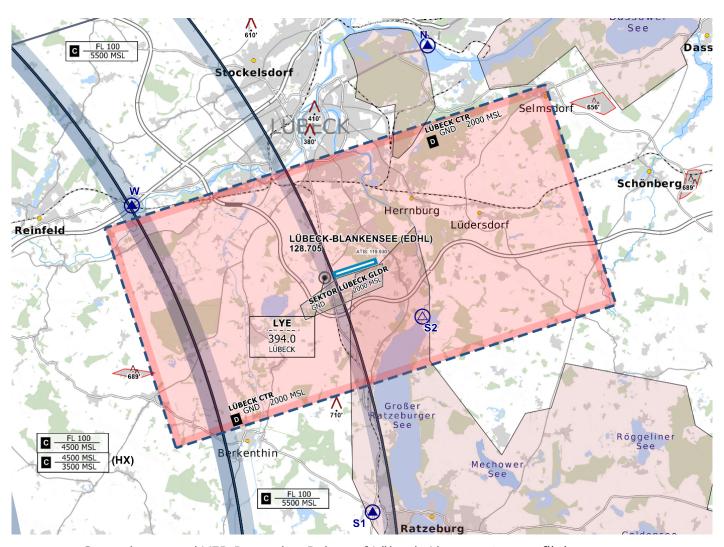

Controlzone and VFR Reporting Points of Lübeck Airport - © openflightmaps.org

Runway and Airport

Lübeck Airport has a 6896ft (2102m) long single runway (07 / 25) with Low-Visibility CAT II equipment on 07, as well as a grass glider strip south of the main runway. **The runway configuration is not dependent on EDDH but should always be considered and coordinated with Bremen Radar (Hamburg Approach).**

The Airport features a small terminal building with check-in facilities, a shop and some restaurants. The apron has three stands, which are suitable for Class C aircrafts such as the Airbus A320, as well as some stands for smaller general aviation aircraft.

Departures

All IFR Departures need a Departure-Release from Bremen Radar! *

Coordinate early enough on TeamSpeak, as Bremen Radar might restrict the initial climb clearance and departures times due to workload and traffic situation.

* If traffic permits, Radar can give a "general departure release until further notice". In that case the tower doesn't need to ask for each departure separately.

Spacing: Departures shall be separated with a minimum of 3 nm or wake turbulence separated, whichever is greater. When two aircrafts have the same SID waypoint the separation shall be increased to 5 nm or wake turbulence separation whichever is greater.

Auto-Handoff: Pilots shall contact Bremen Radar immediately after take-off without a specific handoff.

VFR

Lübeck Airport has four routes in and out of the CTR.

VRP	NOVEMBER	SIERRA (1+2)	LIMA	WHISKEY
NAV	Lübeck Harbor	Leading to Ratzeburg, west of the Ratzeburger Lake	Elbe-Lübeck Canal between Berkenthin and Mölln	Highway A1 west of Lübeck

There are no distinct VFR procedures but it is common practice to use the two reporting points in active runway direction for departures and the two reporting points from behind the runway for arrivals.

Helicopters

Helipad: Lübeck Airport has no Helipads. Helicopters use the runway for all operations and can park at a designated parking area between Hangar E and G, north of the GA Apron. All Helicopters air-taxi to the runway.

Police and Rescue helicopters: Helicopter operations are likely in the vicinity of Hamburg and Lübeck City. Two medical Helicopter Pads are located north of the field inside the CTR.

Low Visibility Operations (LVO)

Whenever low visibility conditions exist, runway 07 should be used as the runway in use. Wind conditions shall be disregarded.

During Low Visibility Operations at Lübeck, only runway 07 can be used for arriving traffic, as this runway is equipped with an ILS approach up to CAT II.

Departing traffic may use both runway directions under the condition that the minimum takeoff RVR is met:

Runway	Takeoff Minima	Condition
07	125 m RVR	
25	400 m RVR	

If the RVR is not below 400 m, departing traffic may request runway 25 due to performance reasons. In this case, close coordination with Bremen Radar is required before issuing the line-up clearance, as arriving traffic will still use runway 07 for landing.

During Low Visibility Operations, Taxiway A shall be used for departing and arriving traffic exclusively. Arriving traffic needs to perform a backtrack in this case. Close coordination with Apron is required to avoid nose-to-nose situations on taxiway A.

When the weather condition requires low visibility operations the use shall be announced in the ATIS.

use & Ivp in the ATIS maker URL

During low visibility operations, the departure and arrival spacing is increased. Delays may be issued earlier than in normal conditions.