


### PRODUCT

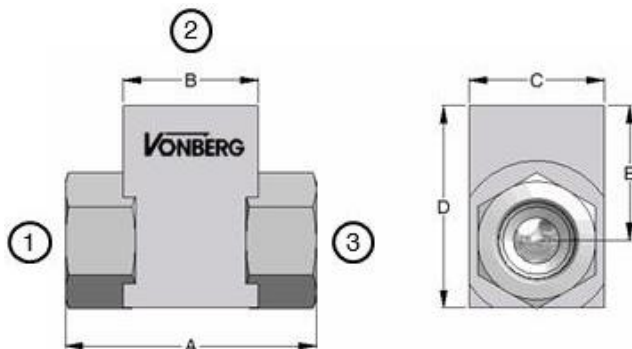

### DESCRIPTION

AN IN-LINE STYLE, BALL TYPE SHUTTLE VALVE FOR USE IN CIRCUITS WHERE THE PRIORITY OF FLOW DIRECTION IS GRANTED TO THE GREATER OF TWO INLETS.

### OPERATION

- FLOW FROM (1) OR (3) TO (2) IS ALLOWED.
- FLOW FROM (1) TO (3) AND (3) TO (1) IS BLOCKED.

### FEATURES

- STEEL BODY AND CHROME BALL.
- HARDENED STEEL SEATS
- NO INTERNAL PACKINGS.

### SPECIFICATIONS

OPERATING PRESSURE	5000 PSI
TEMPERATURE RANGE	250° F TO -40° F
INTERNAL LEAKAGE	5 DPM @ 3500 PSI MAX.

### ORDERING INFORMATION

	65135	-XX	-XX
SERIES NUMBER			
INLET PORTS ID			
OUTLET PORT ID**			

\*\* WHEN INLET AND OUTLET PORTS MATCH, ONLY ONE SUFFIX IS NECESSARY

PORT ID.	PORT SIZE	A	B	C	D	E
65135-4	1/2-14 NPTF	4.24	1.88	2.00	2.50	1.60
65135-6	3/4-14 NPTF	4.24	1.88	2.00	2.50	1.60
65135-10T	-10 SAE - 7/8-14	4.24	1.88	2.00	2.50	1.60
65135-12T	-12 SAE - 1 1/16-12	4.24	1.88	2.00	2.50	1.60

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or use are met. The valves described herein, including without limitation, all component features, specifications, designs, pricing and availability, are subject to change at any time at the sole discretion of Vonberg Valve, Inc. without prior notification.

Page last updated: June 29, 2017



**Vonberg Valve, inc.**  
Hydraulic Valve Specialists

3800 Industrial Avenue • Rolling Meadows, IL 60008-1085 USA © 2015  
phone: 847/259-3800 • fax 847/259-3997 • email: info@vonberg.com