




PRODUCT

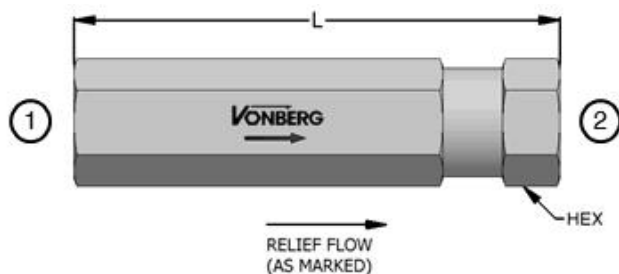

SCHEMATIC

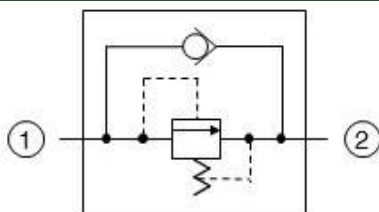

TYPICAL PERFORMANCE

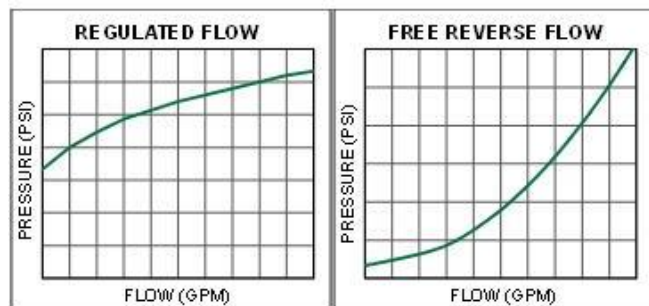

DESCRIPTION

AN IN-LINE, DIRECT ACTING RELIEF VALVE WITH FREE REVERSE FLOW THAT LIMITS MAXIMUM SYSTEM PRESSURE OR ALLOWS SEQUENCING OF PRESSURES WITHIN A CIRCUIT.

OPERATION

- FLOW FROM (1) TO (2) IS BLOCKED UNTIL THE SPECIFIED RELIEF PRESSURE SETTING HAS BEEN EXCEEDED.
- FLOW FROM (2) TO (1) IS UNRESTRICTED WITH A 5-10 PSI CRACK PRESSURE.

FEATURES

- ALUMINUM BODY, STEEL INTERNALS.
- LOW INTERNAL LEAKAGE.
- INTERNAL PACKING - BUNA N.
- LOW PRESSURE DROP.

SPECIFICATIONS

OPERATING PRESSURE	3000 PSI
TEMPERATURE RANGE	250°F TO -40°F
RELIEF TOLERANCE	+/- 10%

ORDERING INFORMATION

49000-2XX-XX
 SERIES NUMBER _____
 THREAD SIZE _____
 RELIEF PRESSURE (PSI) _____
 10 - 150 (PSI)*
* AVAILABLE IN 10 PSI INCREMENTS UP TO A MAXIMUM OF 150 PSI FOR HIGHER PRESSURE APPLICATIONS, SEE 49005 SERIES

MODEL	INLET / OUTLET	THREAD	FLOW CAPACITY	L	HEX
49000-208	-08 SAE PORT	3/4-16	15 GPM	4.13	0.88

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or use are met. The valves described herein, including without limitation, all component features, specifications, designs, pricing and availability, are subject to change at any time at the sole discretion of Vonberg Valve, Inc. without prior notification.

Page last updated: January 19, 2015



Vonberg Valve, inc.
 Hydraulic Valve Specialists

3800 Industrial Avenue • Rolling Meadows, IL 60008-1085 USA © 2015
 phone: 847/259-3800 • fax 847/259-3997 • email: info@vonberg.com