
3 WAY T SERIES MANIFOLD

PRODUCT

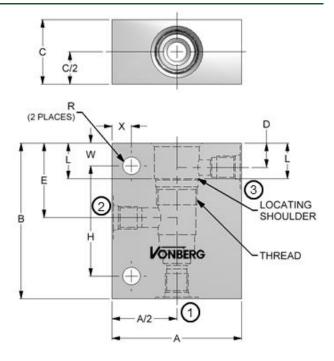

DESCRIPTION

3 WAY CARTRIDGE BODY FOR T SERIES CAVITIES WITH NPTF PORTS OR ORING PORTS CONFORMING TO SAE J1926.

OPERATION

 FLOW DIRECTION IS DEPENDENT ON VALVE TO BE INSTALLED, CONSULT CARTRIDGE VALVE LITERATURE.


FEATURES

- TO ORDER A CARTRIDGE VALVE IN A BODY AS AN ASSEMBLY, ADD THE PORT DESIGNATOR DIGITS OF THE BODY PART NUMBER TO THE END OF THE CARTRIDGE VALVE NUMBER. EXAMPLE: 55T11-4-3000-8T
- MANY PORT SIZE AND THREAD OPTIONS AVAILABLE.
- STANDARD BODIES ARE ALUMINUM
- CONSULT FACTORY FOR AVAILABILITY OF ALTERNATE MATERIALS.

SPECIFICATIONS

PRESSURE RANGE	50 PSI TO 3500 PSI					
TEMPERATURE RANGE	250°F TO -40°F					

ORDERING INFORMATION

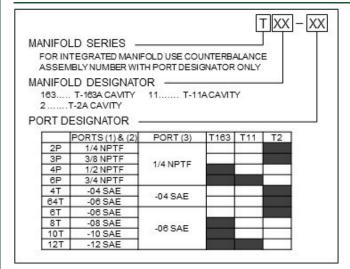

MODEL	THREAD	Α	В	С	D	E	н	R	W	X	L (MIN.)
T163-XX	M16X1.5-6H	2.00	3.00	1.00	0.44	1.27	2.13	0.28	0.44	0.28	0.61
T11-XX	M20X1.5-6H	2.50	3.00	1.25	0.47	1.44	2.13	0.34	0.44	0.38	0.69
T2-XX	1-14 UNS-2B	3.00	3.25	1.50	0.59	1.50	2.25	0.42	0.50	0.50	0.72

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or Vonberg Valve, Inc. without prior notification.

Page last updated: June 04, 2015

