


PRODUCT

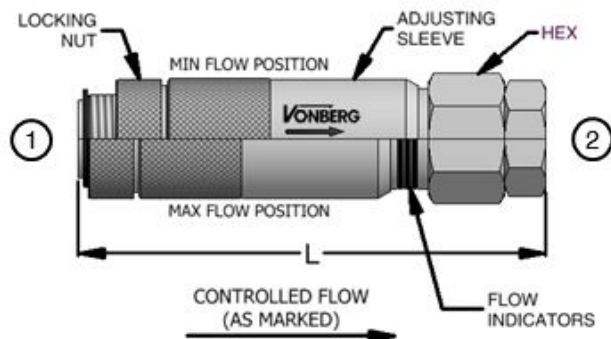

DESCRIPTION

A FULLY ADJUSTABLE, INLINE STYLE, PRESSURE-COMPENSATED, FLOW REGULATOR INTENDED FOR FIXED DISPLACEMENT HYDRAULIC CIRCUIT APPLICATIONS.

OPERATION

- THIS REGULATOR WILL MAINTAIN A CONSTANT FLOW RATE FROM (1) TO (2) THROUGHOUT A SPECIFIED PRESSURE RANGE.
- REVERSE FLOW PASSES THROUGH THE CONTROLLING ORIFICE AND IS UNCONTROLLED PRODUCING A PRESSURE DIFFERENTIAL OF 120 PSI MAX. AT 150% OF CONTROLLED FLOW.
- COUNTERCLOCKWISE ADJUSTMENT TO INCREASE FLOW.

FEATURES

- UNIQUE AXIAL ROTATION FOR FULL ADJUSTABILITY.
- **S.I.D.** SURGES INTERNALLY DAMPENED FEATURE IS OPTIONAL FOR LOAD LOWERING APPLICATIONS.
- ALUMINUM AND STEEL BODY, STEEL INTERNALS.
- HYDRAULIC FLUIDS - GENERAL.

SPECIFICATIONS

PRESSURE RANGE	50 PSI TO 3500 PSI
TEMPERATURE RANGE	250°F TO -40°F
FLOW TOLERANCE	+/- 10% (+/- 15% UNDER 1.5 GPM)

ORDERING INFORMATION

	3200	X	-	X
SERIES NUMBER				
PORT SIZE				
UNDAMPENED - BLANK				
DAMPENED (S.I.D.) - 1				

Model	INLET/OUTLET	FLOW RANGE	L	HEX
32004	-04 SAE PORT	0.2 TO 5.0 GPM	4.75	1.125
32006	-06 SAE PORT	0.5 TO 6.0 GPM	3.85	1.000
32008	-08 SAE PORT	1.0 TO 8.0 GPM	4.50	1.250

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or use are met. The valves described herein, including without limitation, all component features, specifications, designs, pricing and availability, are subject to change at any time at the sole discretion of Vonberg Valve, Inc. without prior notification.

Page last updated: October 03, 2017



Vonberg Valve, Inc.
Hydraulic Valve Specialists

3800 Industrial Avenue • Rolling Meadows, IL 60008-1085 USA © 2015
phone: 847/259-3800 • fax 847/259-3997 • email: info@vonberg.com