




### PRODUCT

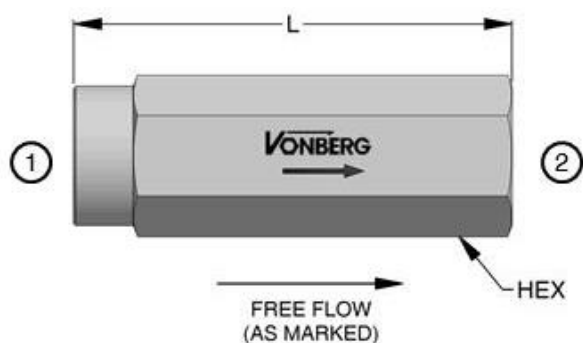

### SCHEMATIC

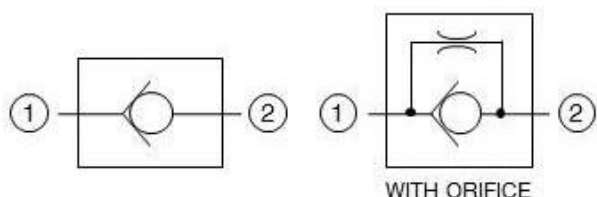

### TYPICAL PERFORMANCE

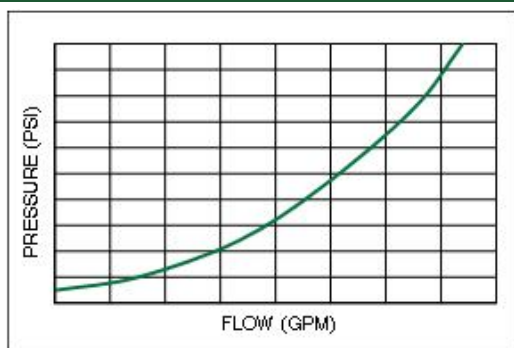

### DESCRIPTION

AN IN-LINE STYLE, POPPET TYPE CHECK VALVE INTENDED FOR BLOCKING FLUID FLOW.

### OPERATION

- FLOW FROM (1) TO (2) IS ALLOWED WITH A STANDARD CRACK PRESSURE OF 3-5 PSI.
- FLOW FROM (2) TO (1) IS BLOCKED WITH A SPRING BIAS TO ASSIST IN STATIC AND LOW LOAD CONDITIONS.


### FEATURES

- ALUMINUM BODY AND STEEL POPPET.
- LOW INTERNAL LEAKAGE, 5 DPM.
- NO INTERNAL PACKINGS.
- LOW PRESSURE DROP.
- SPECIAL CRACK PRESSURES AVAILABLE UPON REQUEST.

### SPECIFICATIONS

OPERATING PRESSURE	3500 PSI
TEMPERATURE RANGE	250° F TO -40° F
STANDARD CRACK PRESSURE	3-5 PSI

### ORDERING INFORMATION

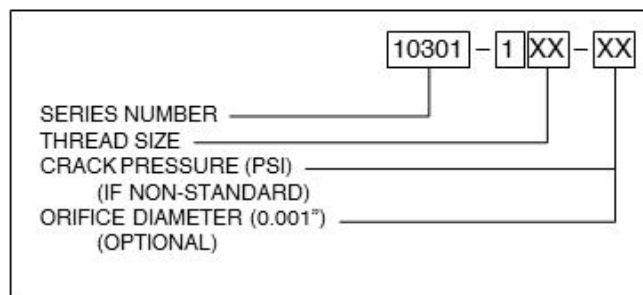

MODEL	INLET / OUTLET	FLOW CAPACITY	L	HEX
10301-101	1/8-27 NPTF	2.0 GPM	1.80	0.562
10301-102	1/4-18 NPTF	5.0 GPM	2.40	0.750
10301-103	3/8-18 NPTF	10.0 GPM	2.75	0.875
10301-104	1/2-14 NPTF	20.0 GPM	3.50	1.125
10301-106	3/4-14 NPTF	40.0 GPM	4.00	1.375
10301-108	1 - 11 1/2 NPTF	50.0 GPM	4.78	1.625
10301-110	1 1/4 - 11 1/2 NPTF	60.0 GPM	4.90	2.000
10301-112	1 1/2 - 11 1/2 NPTF	80.0 GPM	7.00	2.250

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or use are met. The valves described herein, including without limitation, all component features, specifications, designs, pricing and availability, are subject to change at any time at the sole discretion of Vonberg Valve, Inc. without prior notification.

Page last updated: February 09, 2015



**Vonberg Valve, Inc.**  
 Hydraulic Valve Specialists

3800 Industrial Avenue • Rolling Meadows, IL 60008-1085 USA © 2015  
 phone: 847/259-3800 • fax 847/259-3997 • email: info@vonberg.com