




PRODUCT

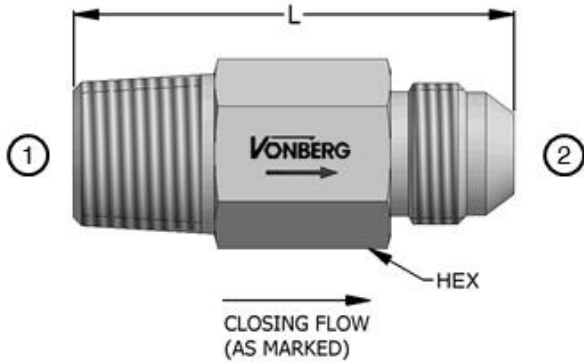

SCHEMATIC

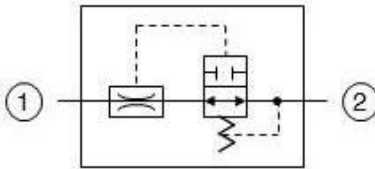

TYPICAL PERFORMANCE

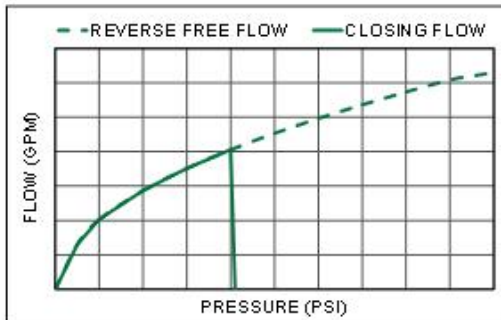

DESCRIPTION

AN IN-LINE VELOCITY FUSE WITH A MALE NPTF INLET AND A MALE JIC OUTLET THAT PROVIDES FULL-LINE SHUT-OFF IN THE EVENT OF A LINE FAILURE.

OPERATION

- A FLOW BELOW THE SPECIFIED LIMIT IS ALLOWED FROM (1) TO (2).
- FLOW ABOVE THE SPECIFIED LIMIT IS ASSUMED TO BE A LINE FAILURE AND IS BLOCKED.
- FLOW FROM (2) TO (1) PASSES THROUGH THE CONTROLLING ORIFICE BUT IS UNCONTROLLED.

FEATURES

- STEEL COMPONENTS.
- FAIL SAFE DESIGN.
- RAPID RESPONSE.

SPECIFICATIONS

OPERATING PRESSURE	3500 PSI
TEMPERATURE RANGE	250° F TO -40° F
REOPENING DIFFERENTIAL	50 PSI
CLOSING FLOW TOLERANCE	+15% / -0%

ORDERING INFORMATION

28001	-5	XX	-XX
SERIES NUMBER _____ PORT SIZE _____ CLOSING FLOW (GPM) _____			

Model	INLET 1	OUTLET 2	FLOW RANGE	L	HEX
28001-502	1/4-18 NPTF	-04 JIC - 7/16-20	0.1 TO 4.0 GPM	2.30	0.625
28001-503	3/8-18 NPTF	-06 JIC - 9/16-18	0.5 TO 10.0 GPM	2.30	0.750
28001-504	1/2-14 NPTF	-08 JIC - 3/4-16	1.0 TO 25.0 GPM	2.34	0.875
28001-506	3/4-14 NPTF	-12 JIC - 1 1/8-12	2.0 TO 40.0 GPM	2.75	1.250
28001-508	1-11 1/2 NPTF	-16 JIC - 1 5/8-12	2.0 TO 50.0 GPM	3.25	1.375
28001-512	1 1/2-11 1/2 NPTF	-24 JIC - 1 7/8-12	5.0 TO 80.0 GPM	4.85	2.000

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or use are met. The valves described herein, including without limitation, all component features, specifications, designs, pricing and availability, are subject to change at any time at the sole discretion of Vonberg Valve, Inc. without prior notification.

Page last updated: February 19, 2015