


气垫导轨的水平调节				
方向	$\Delta t_1(\text{ms})$	$\Delta t_2(\text{ms})$	$2 \times \Delta t_1 - \Delta t_2 / (\Delta t_1 + \Delta t_2) (\%)$	
从左到右	20.20	20.63	2.1	
从右到左	26.49	27.13	2.4	

弹簧振子简谐振动周期与振幅的关系				
周期数=3	m1=211.09g		ms=21.41g	
	18.00	20.00	22.00	24.00
1	4.5252	4.5252	4.5256	4.5260
2	4.5262	4.5251	4.5265	4.5261
3	4.5250	4.5245	4.5258	4.5255
t平均	4.5255	4.5249	4.5260	4.5259
周期	1.5085	1.5083	1.5087	1.5086
倔强系数	3.7860	3.7869	3.7852	3.7854



弹簧振子简谐振动周期与振子质量的关系(振幅A=20.00cm,周期数=3)						
	m1(*10 ⁻³ kg)	时间t(s)	t̄(s)	周期T(s)	T ² (s ²)	
滑块	211.09	4.5252	4.5249	1.5083	2.2750	
		4.5251				
		4.5245				
滑块+两个骑码	310.24	5.4571	5.4571	1.8190	3.3089	
		5.4570				
		5.4573				
滑块+四个骑码	409.74	6.2513	6.2506	2.0835	4.3412	
		6.2510				
		6.2496				
滑块+六个骑码	509.44	6.9539	6.9533	2.3178	5.3720	
		6.9538				
		6.9522				

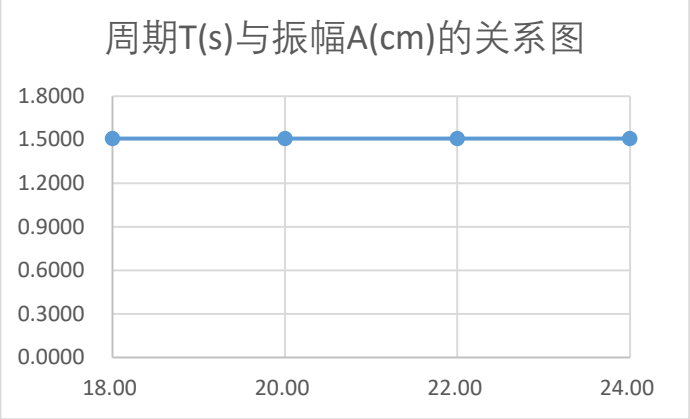