

High Frequency Ceramic Solutions

Miniature 2.45GHz Impedance Matched Front-End Filter Optimized for Semtech SX1280, SX1281

P/N 2450FM07D0034


Detail Specification: 5/10/2018

Page 1 of 4

AEC-Q200 qualified component available, contact us at: www.johansontechnology.com/ask-a-question

General Specifications

| | |
|--|---|
| Part Number | 2450FM07D0034 |
| Frequency (MHz) | 2400 - 2500 |
| Insertion loss (dB) | 0.75 Typ. (1.0 max.) |
| Return Loss (dB) | 14 Typ. (10 min.) |
| Input Impedance (Terminal Toward Chipset) | Impedance matched to Semtech SX1280, SX1281 |
| Output Impedance | 50Ω |
| Power Capacity | 3W max. (CW) |

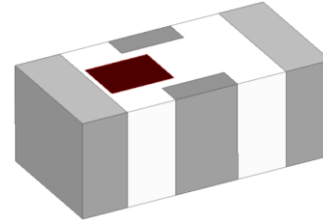

| Attenuation (dB) | | Reel Quantity | 10,000 pcs |
|------------------|---------------------|---|--|
| 4800 - 5000MHz | 35 Typ. (30 min.) | Storage Temperature | -40 to +85°C |
| 7200 - 7500MHz | 30 Typ. (25 min.) | Operating Temperature | -40 to +85°C |
| 9600 - 10000MHz | 30 Typ. (25 min.) | Recommended Storage Conditions for unused T&R product | +5 to +35°C, Humidity: 45-75%RH, 18 mo. Max. |
| 12000 - 12500MHz | 25 Typ. (20 min.) | | |
| 14400 - 15000MHz | 9.5 Typ. (4.5 min.) | | |
| 16800 - 17000MHz | 8.0 Typ. (3.0 min.) | | |

You can download measured s-parameters of this component at: www.johansontechnology.com/semtech




Part Number Explanation

| P/N Suffix | Packaging Style | Bulk | Suffix = S | E.g. 2450FM07D0034S |
|------------|-------------------|----------|---------------|----------------------------|
| | | T & R | Suffix = T | E.g. 2450FM07D0034T |
| | Termination Style | 100% Tin | Suffix = None | E.g. 2450FM07D0034(T or S) |

For the Full App Note and Layout Files, go to: www.johansontechnology.com/semtech


Mechanical Dimensions

| | In | mm |
|---|---------------|-------------|
| L | 0.039 ± 0.002 | 1.00 ± 0.05 |
| W | 0.020 ± 0.002 | 0.50 ± 0.05 |
| T | 0.016 max. | 0.40 max. |
| a | 0.007 ± 0.004 | 0.18 ± 0.10 |
| b | 0.010 ± 0.004 | 0.25 ± 0.10 |

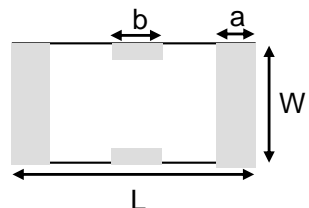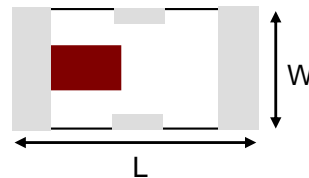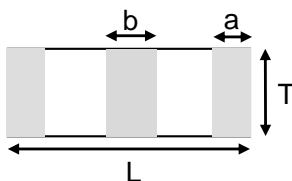

Terminal Configuration

| No. | Function |
|-----|--------------------------|
| 1 | IN (Toward the chipset) |
| 2 | GND |
| 3 | OUT (Toward the antenna) |
| 4 | GND |

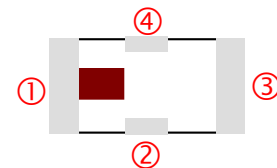

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 1.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


Miniature 2.45GHz Impedance Matched Front-End Filter Optimized for
Semtech SX1280, SX1281




P/N 2450FM07D0034

Detail Specification: 5/10/2018

Page 2 of 4

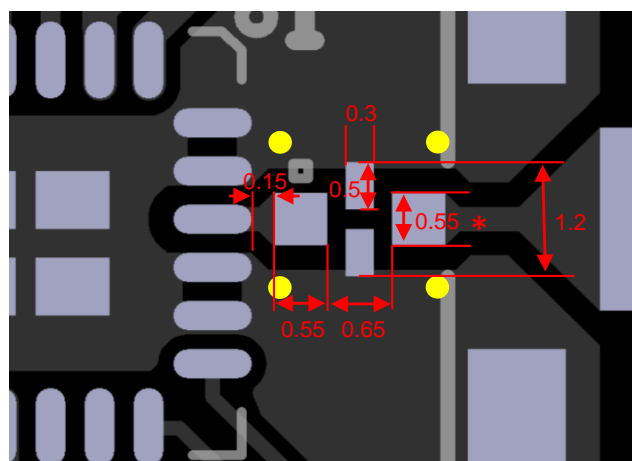Mounting Pad Dimensions




-  Solder Resist
-  Land
-  Through-hole ($\phi 0.20$)

*Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

Units in mm

Do you need the layout files of the above? Go to: www.johansontechnology.com/ask-a-question

Measurement Schematic

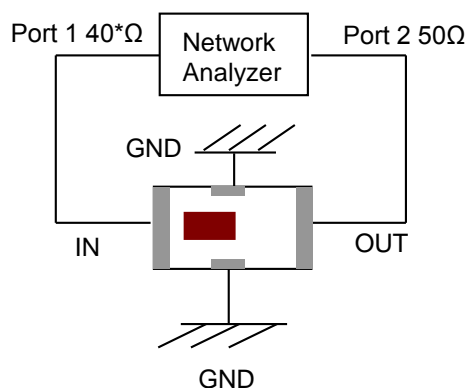

Port 1: Filter IN (red marking side toward chipset)

*Port 1 is indeed 40ohms!

Port 2: Filter OUT (toward antenna)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 1.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


Miniature 2.45GHz Impedance Matched Front-End Filter Optimized for
Semtech SX1280, SX1281

P/N 2450FM07D0034

Detail Specification: 5/10/2018

Page 3 of 4

Typical Electrical Characteristics (T=25°C)

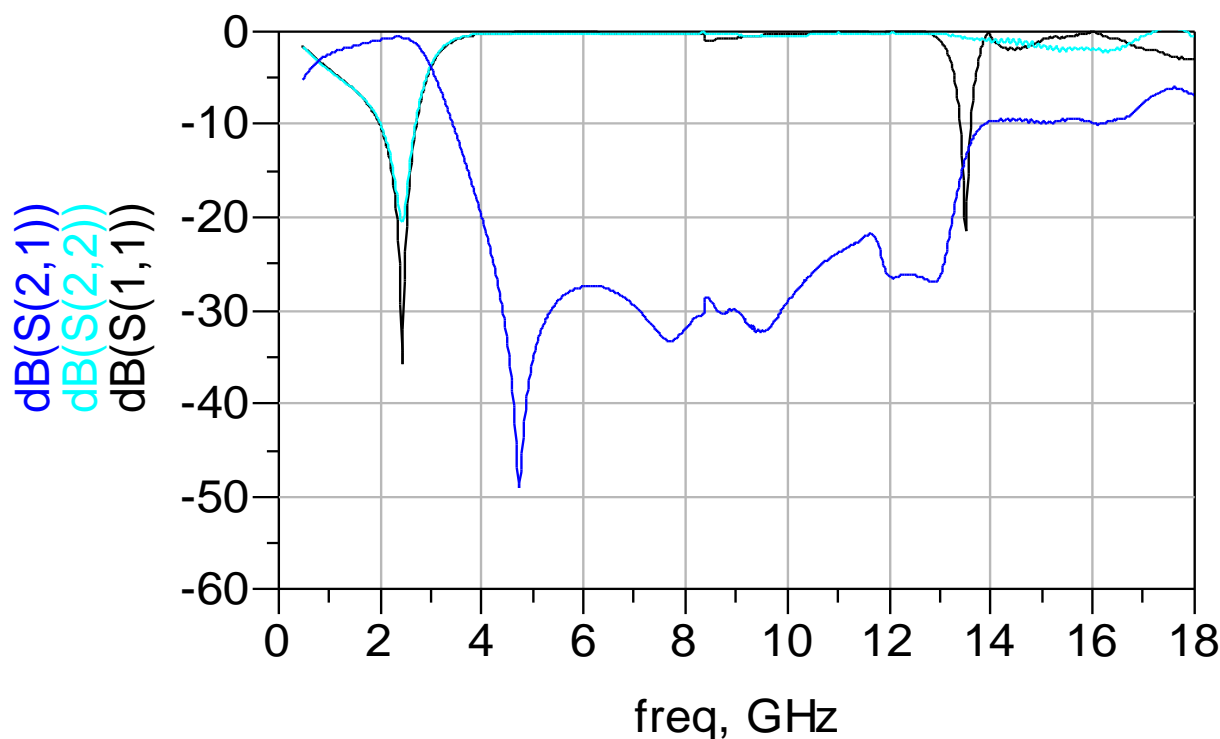

If you would like recommendation on a mini 2.4G embedded antenna, free layout verification, reference design files (gerbers, schematic, etc) or s-parameter files, please contact us at:

www.johansontechnology.com/ask-a-question

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 1.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

**Miniature 2.45GHz Impedance Matched Front-End Filter Optimized for
Semtech SX1280, SX1281**

P/N 2450FM07D0034

Detail Specification: 5/10/2018

Page 4 of 4

Application Notes, Layout Files, and more

www.johansontechnology.com/semtech

Packaging information

www.johansontechnology.com/tape-reel-packaging

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

www.johansontechnology.com/msl-rating

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/recommended-storage-conditions

RoHS Compliance

www.johansontechnology.com/rohs-compliance


Antenna layout and tuning techniques

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipc-antenna-services

Johanson uses 6/6 RoHS Green Low-Temperature-Co-fired-Ceramic (LTCC) integrated passive technology in a 4-pin (Sn plated) monolithic structure. This component is 100% RF Tested, making it a more reliable system, impedance controlled environment, consistent-guaranteed RF performance in a very small RF front end-solution compared to the L/C discrete solution.

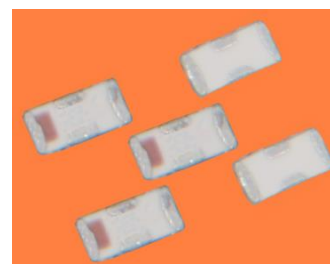

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 1.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

2450FM07D0034T