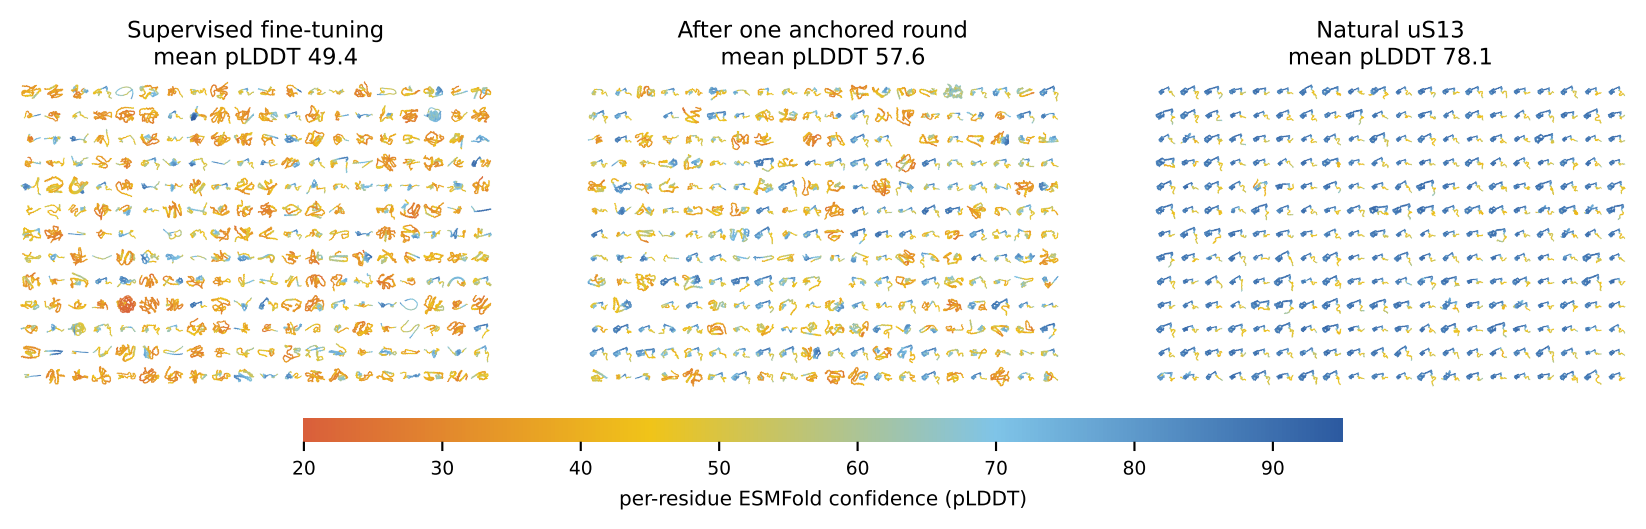

Supervised fine-tuning
mean pLDDT 49.4
After one anchored round
mean pLDDT 57.6
Natural uS13
mean pLDDT 78.1
20
30
40
50
60
70
80
90
per-residue ESMFold confidence (pLDDT)