
E1 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1" Bolted Plastic

with Plastic Center Section


PERFORMANCE

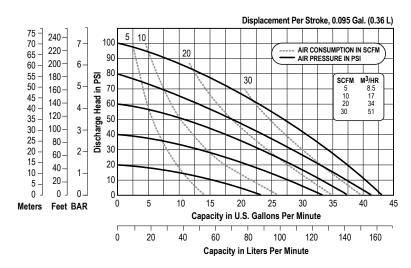


NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate
Adjustable to 0-43 gpm (162.8 LPM)
Port Size
Suction1" 150# ANSI/DIN 325 Flange
Discharge1" 150# ANSI/DIN 325 Flange
Air Inlet 3/8" NPT
Air Exhaust 1/2" NPT
Suction Lift
Dry
Wet
Max Solid Size (Diameter)
1/8" (3.1 mm)
Max Noise Level 94 dB(A)
Shipping Weights
Polypropylene 17 lbs (7.7 kg)
PVDF 22 lbs (10 kg)







Warren Rupp, Inc. | A Unit of IDEX Corporation 800 North Main Street | Mansfield, OH 44902 USA Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e1nmdlCds-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

E1 DATA SHEET

SPECIFICATIONS & PERFORMANCE


1" Bolted Plastic with Plastic Center Section

DIMENSIONS

E1 Bolted Plastic

Dimensions in inches (mm dimensions in brackets)


The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

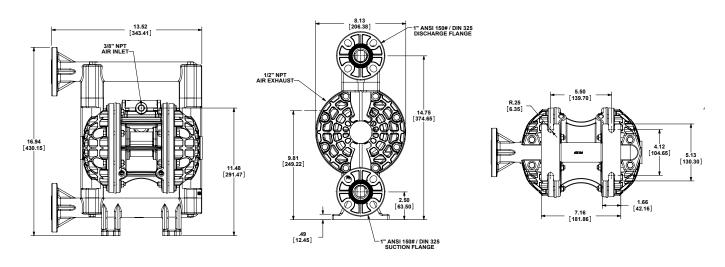



E1 Bolted Plastic (Center Ported Manifold Option)

Dimensions in inches (mm dimensions in brackets)

The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.









Warren Rupp, Inc. | A Unit of IDEX Corporation 800 North Main Street | Mansfield, OH 44902 USA Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e1nmdlCds-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.