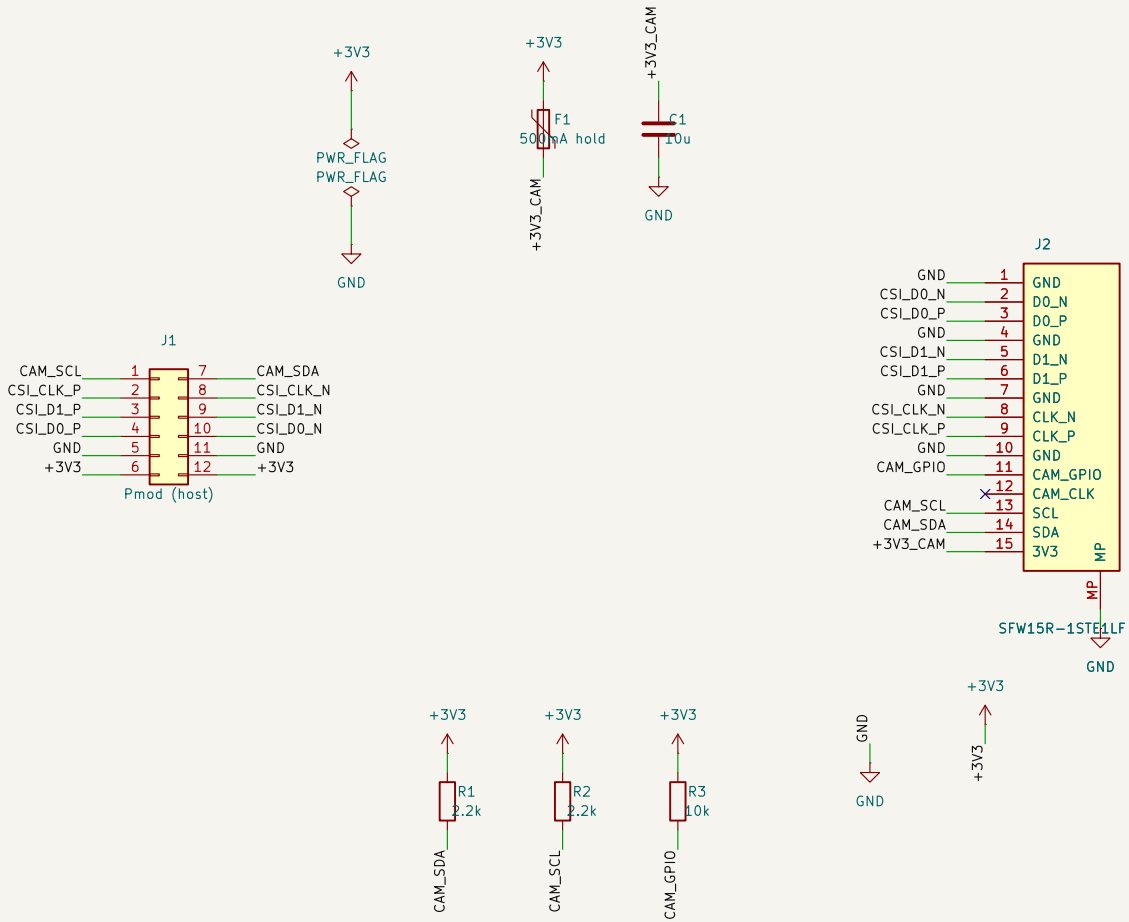


Pmod RPi Camera: Raspberry Pi camera (15-pin FFC, 2-lane MIPI CSI-2) on one Pmod.

Soft D-PHY receiver: FPGA LVDS inputs with on-chip 100R termination, no LP receivers (eda/csi_capture, rtl/csi2). Lanes are DC coupled: no series R, no AC coupling, no bias.

CSI pairs: 100 ohm differential, routed on F.Cu over solid B.Cu ground, no vias.

J2: Amphenol SFW15R-1STE1LF (bottom contact, pin 1 as in FCI JSA95855), the same part as J1 of the Camera Module 2.

The standard RPi camera cable has its contacts on opposite faces at the two ends: pin n meets pin n. F1 limits a wrong cable.

CAM_GPIO (camera power enable) pulled up: the camera powers with the Pmod. CAM_CLK not used.

Raspberry Pi Camera v2 (IMX219) and other 15-pin 2-lane CSI-2 cameras

fpga_samples / eda/csi_capture

Sheet: /

File: Pmod_RPiCamera.kicad_sch

Title: Pmod RPi Camera (MIPI CSI-2)

Size: A4	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1