

Page Description

1	Table of Contents
2	Audio, Base
3	Audio, Premium 1/2
4	Audio, Premium 2/2
5	Body Controller Front J1, J2
6	Body Controller Front J3, Cables
7	Body Controller Front J4
8	Body Controller Left J1, Center Console
9	Body Controller Left J2, OHC
10	Body Controller Right J1
11	Body Controller Right J2, J5
12	Body Controller Dashboard
13	Brake Controls
14	CAN Chassis
15	CAN Party
16	CAN Vehicle
17	Charge Port Inlet
18	Door Front Left
19	Door Front Right
20	Door Rear
21	Drive Inverters
22	Driver Assistance
23	Driver Assistance, RHD
24	eCall
25	HV Battery & HVIL
26	HV Penthouse
27	HVAC Case Subassembly
28	HVAC Thermal Subassembly
29	Power Distribution, E-Fuse VCFront, J1-J4
30	Power Distribution, E-Fuse VCFront, J5-J12
31	Power Distribution, E-Fuse VCLeft, J1-J3
32	Power Distribution, E-Fuse VCLeft, J4-J9
33	Power Distribution, E-Fuse VCRight, J1-J3
34	Power Distribution, E-Fuse VCRight, J4-J9
35	Power Distribution, Grounding A,B,C Pillars
36	Power Distribution, Grounding Frunk
37	Power Distribution, Grounding Trunk
38	Restraints Airbags
39	RF/Special Cables
40	RF/Special Cables, RHD
41	Seats Front Left
42	Seats Front Right
43	Security Controls
44	Steering
45	Ultrasonics

Table 1: Abbreviations

LF	Left Front	RF	Right Front
LR	Left Rear	RR	Right Rear
LHS	Left-Hand Side	RHS	Right-Hand Side

Table 2: Harness Designators

A	LH BODY	Q	PARCEL SHELF
B	RH BODY	R	LH RR DOOR
C	CENTER CONSOLE	S	RH RR DOOR
D	LH FR DOOR	T	LIFT GATE
F	FR FASCIA	U	THERMAL
G	RR FASCIA	V	GLASS
H	HV PENTHOUSE	W	FRUNK
J	IP	X	REAR SUBFRAME
K	HEADLINER	Y	FRONT SEATS
L	FRONT END MODULE		
N	FRONT SUBFRAME		
P	RH FR DOOR		

Table 3: Wire Color Designators

BK	Black	OG	Orange
BN	Brown	RD	Red
BU	Blue	TN	Tan
GN	Green	VT	Violet
GY	Gray	WH	White
		YE	Yellow

Table 4: Wire Type Designators

FLRY	Thin wall 105C rated, regular stranded PVC insulated [FLRY-A]
FLRB	Thin wall 105C rated, bunched conductor PVC insulated [FLRY-B]
MCIV	Thin wall 105C rated, compressed conductor PVC (halogen free) insulated
XR15	Thin wall 150C rated, cross-linked polyolefin, high flexible
FLXB	Thin wall 125C rated, cross-linked polyolefin, high flexible, halogen free insulated
3TBL	Thick wall 105C rated, aluminum conductor PVC insulated

General Notes:

- 1) Switches [Relays] are shown in their inactive [de-energized] state.
- 2) Splices may be split across pages for visual clarity with respect to the function displayed
- 3) Some connectors are split across multiple pages for clarity. There is no overall reference in this document for the signals routed to a specific connector.
- 4) Wire sizes are specified in mm² cross-sectional area (CSA) per SAE 1127/8
- 5) Wire Specification: 60V, thin-wall PVC (ISO type or equivalent). Default wire type to be rated 60VDC/25VAC and -40C to 105C operating temperature. See DIN 13602 or ISO 6722 for detailed specifications.
- 6) Unless otherwise specified at the device pins, terminal plating is to be Tin or Pre-Tin


TERMINAL PLATING

- ☐ GOLD TERMINAL NECESSARY
- ☐ SILVER PLATING NECESSARY

- 7) Inline connector gender specification is based on the terminal type. Inline connectors with "M" suffix have male, tab or pin terminals. Inline connectors with "F" suffix have female, receptacle or socket terminals

Table 5: Option Codes

DRIVR	Driver Seat
PASSN	Passenger Seat
LHST	Left side Seat
RHST	Right Side Seat
FOG	Fog Light
PCOLM	Power Steering Column
PAUDIO	Premium Audio
COLDW	Cold Weather Package
LHD	Left Hand Drive
RHD	Right Hand Drive
AWD	All Wheel Drive
RWD	Rear Wheel Drive
PINLT	Premium Interior Lights
PMIRR	Premium Mirror with Powerfold
REEU	Region Europe
RENA	Region North America
CSUSP	Coil Suspension
PREMST	Premium Seat

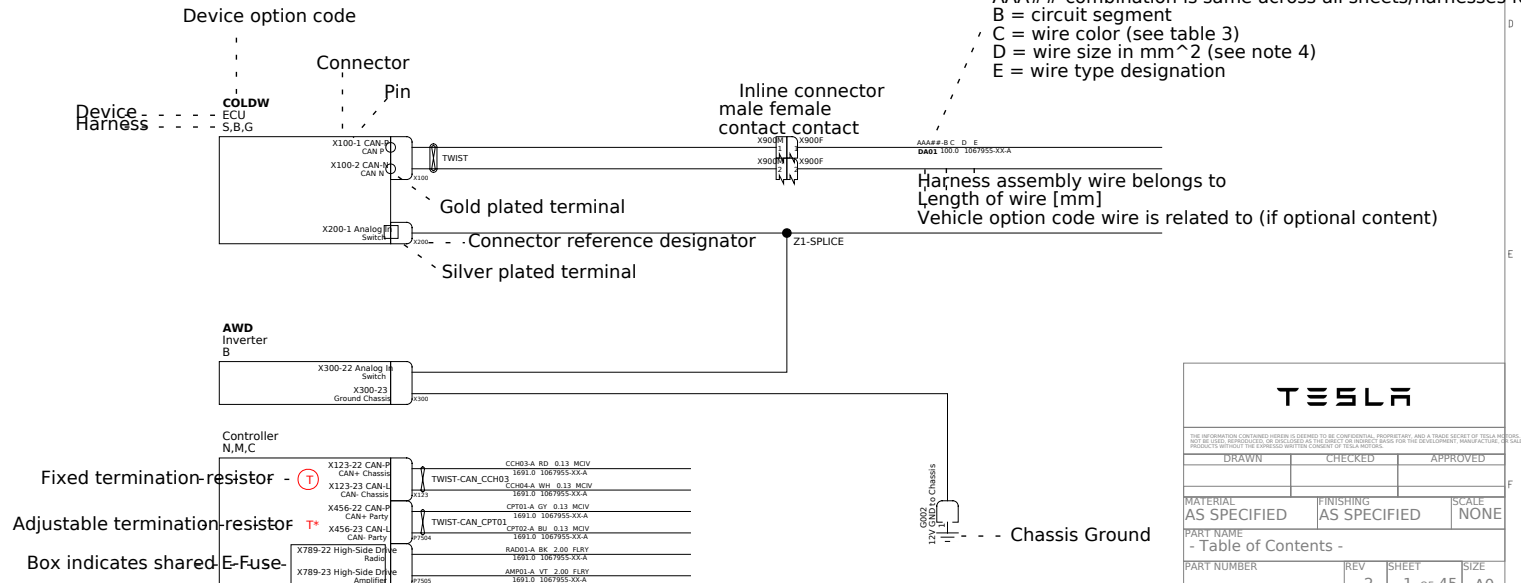

TESLA

THIS INFORMATION CONTAINS TRADE SECRETS OR OTHER INFORMATION THAT IS THE PROPERTY OF TESLA AND IS NOT TO BE RELEASED OR DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF TESLA.			
DRAWN	CHECKED	APPROVED	
MATERIAL AS SPECIFIED	FINISHING AS SPECIFIED	SCALE NONE	
PART NAME - Table of Contents -			
PART NUMBER	REV 2	SHEET 1 of 45	SIZE A0