WILLIAMS

Electric Ripshear Shredders



Setting the Standard for Slow-Speed, High Torque Shear Shredders


BULLETIN 1003

Williams Uses a Unique Bearing Design, Better Than the Competition


The most important design advantage Williams has over all other manufacturers is the use of only **two bearings vs. three fixed bearings**. This new approach not only makes the unit easier to build and service, but reduces shaft breakage due to **fatigue failures**.

To understand how, look at these simple drawings:

THE WILLIAMS **"TWO-BEARING" DESIGN** REMOVES THE MOST DESTRUCTIVE STRESS POINTS, ALLOWING THE SHAFTS TO *FLEX*. IT ALSO ALLOWS THE DRIVES TO FREE-FLOAT. THE ONLY REMAINING STRESS IS TORSIONAL AND BENDING.

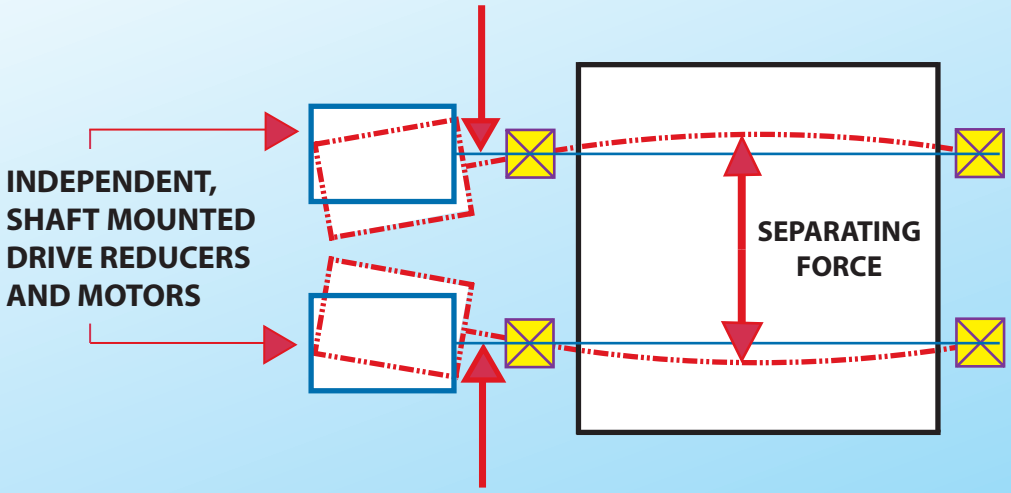

WITH THE **OLD** **"THREE-FIXED BEARING" DESIGN**, EVERY REVOLUTION CAUSES TREMENDOUS SHEAR STRESS AT THE GEARS. *FATIGUE FAILURE* OCCURS HERE DUE TO THE SHEAR MOMENTS CAUSED WHEN THE SHAFTS ARE FORCED TO STAY STRAIGHT WHILE ROTATING.

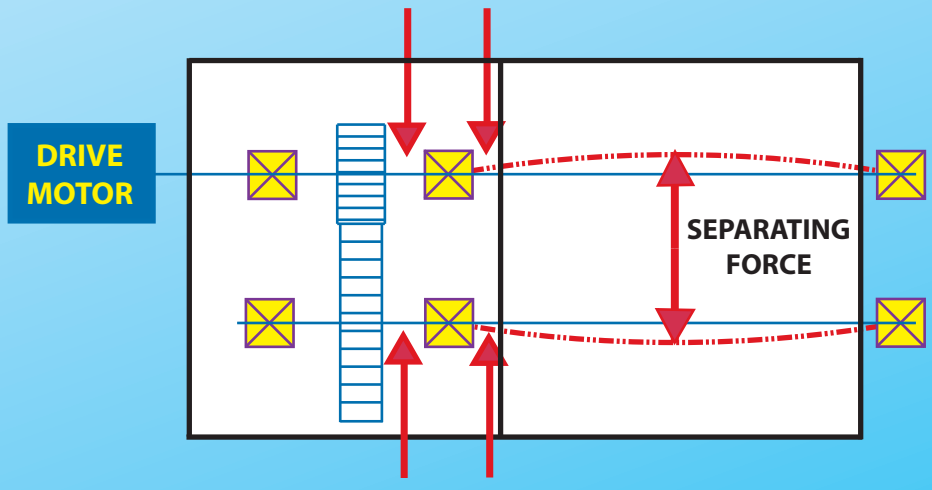

Additional Features


Another innovation is the use of an electronic soft start drive which senses the amp inrush and limits the amount of electricity to each motor, thus limiting torque. This simulates a hydraulic drive without the inefficiencies and increased maintenance normally associated with hydraulic drives.

A timing belt between the electric motors and shaft-mounted reducers allows easy shaft speed changes to meet field conditions and customer needs.

A **patented**, quick, and simple positive locking system on the rotor stack provides a positive means of securing and preloading rotor stack, but allows quick access for maintenance and replacement of cutting teeth.

EXAMPLE APPLICATION:

For reject wallboard processing; Quickly and efficiently reduces large bundles of reject board to minus 6".

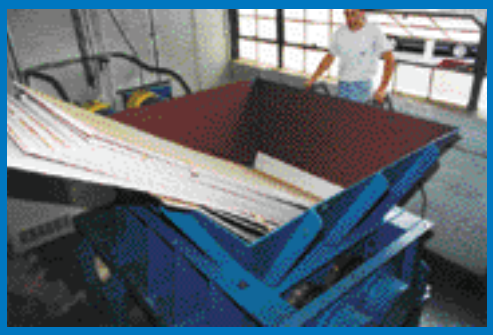





Williams Ripshear Shredder and Steel Pan Discharge Conveyor located at a large solid waste to energy plant.




Let Us Help Select the Right Ripshear for You

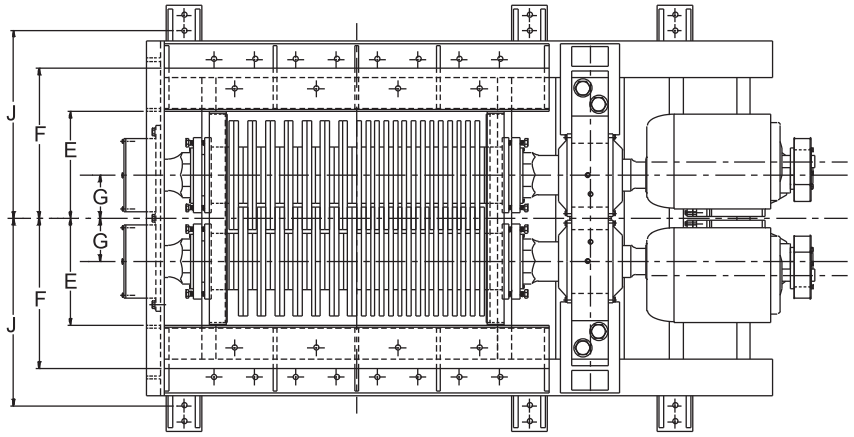

TOP VIEW

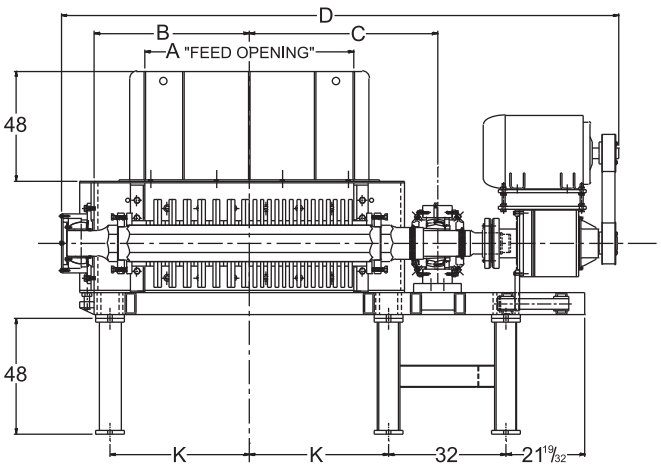

FRONT ELEVATION VIEW

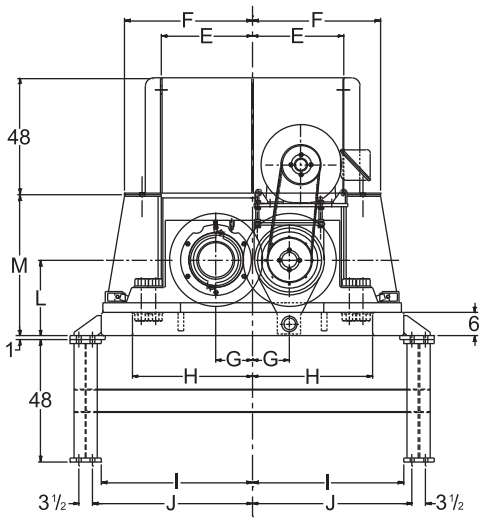

DRIVE END VIEW

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M
100 - 4052	53/ 1346	40 1/4 / 1022	49 3/8 / 1254	148 / 3759	21 1/2 / 546	31/ 787	9/ 229	29/ 737	37/ 940	39 1/4 / 997	36/ 914	18 3/4 / 476	35/ 889
150 - 4452	53/ 1346	40 1/4 / 1022	49 3/8 / 1254	148 / 3759	23 1/2 / 597	33/ 838	9 1/2 / 241	31/ 787	39/ 991	41 1/4 / 1048	36/ 914	19 1/2 / 495	36 1/2 / 927
200 - 4456	57/ 1448	42 1/4 / 1073	51 3/8 / 1305	152 / 3861	23 1/2 / 597	33/ 838	9 1/2 / 241	31/ 787	39/ 991	41 1/4 / 1048	38/ 965	19 1/2 / 495	36 1/2 / 927
300 - 6056	57/ 1448	42 1/4 / 1073	51 3/8 / 1305	152 / 3861	31/ 787	40 1/2 / 1029	12 1/2 / 318	38 1/2 / 978	46 1/2 / 1181	48 3/4 / 1238	38/ 965	25 1/4 / 641	48/ 1219
400 - 7460	61/ 1549	44 1/4 / 1124	53 3/8 / 1356	156 / 3962	38 1/2 / 978	48/ 1219	14 3/4 / 375	46/ 1168	54/ 1372	56 1/4 / 1429	40/ 1016	29 3/4 / 756	57/ 1448
400 - 7472	73/ 1854	50 1/4 / 1276	59 3/8 / 1508	168 / 4267	38 1/2 / 978	48/ 1219	14 3/4 / 375	46/ 1168	54/ 1372	56 1/4 / 1429	46/ 1168	29 3/4 / 756	57/ 1448
500 - 7460	61/ 1549	44 1/4 / 1124	53 3/8 / 1356	156 / 3962	38 1/2 / 978	48/ 1219	14 3/4 / 375	46/ 1168	54/ 1372	56 1/4 / 1429	40/ 1016	29 3/4 / 756	57/ 1448
500 - 7472	73/ 1854	50 1/4 / 1276	59 3/8 / 1508	168 / 4267	38 1/2 / 978	48/ 1219	14 3/4 / 375	46/ 1168	54/ 1372	56 1/4 / 1429	46/ 1168	29 3/4 / 756	57/ 1448
600 - 7460	61/ 1549	44 1/4 / 1124	53 3/8 / 1356	156 / 3962	38 1/2 / 978	48/ 1219	14 3/4 / 375	46/ 1168	54/ 1372	56 1/4 / 1429	40/ 1016	29 3/4 / 756	57/ 1448
600 - 7472	73/ 1854	50 1/4 / 1276	59 3/8 / 1508	168 / 4267	38 1/2 / 978	48/ 1219	14 3/4 / 375	46/ 1168	54/ 1372	56 1/4 / 1429	46/ 1168	29 3/4 / 756	57/ 1448

WILLIAMS

PATENT CRUSHER and PULVERIZER CO., INC.

2701 North Broadway, St. Louis, Missouri 63102 USA

Phone: (314) 621-3348 Fax: (314) 436-2639

sales@williamscrusher.com www.williamscrusher.com