
WILLIAMS


OVER 117 YEARS OF EXPERIENCE

Self-Clear Ripshear Shredder

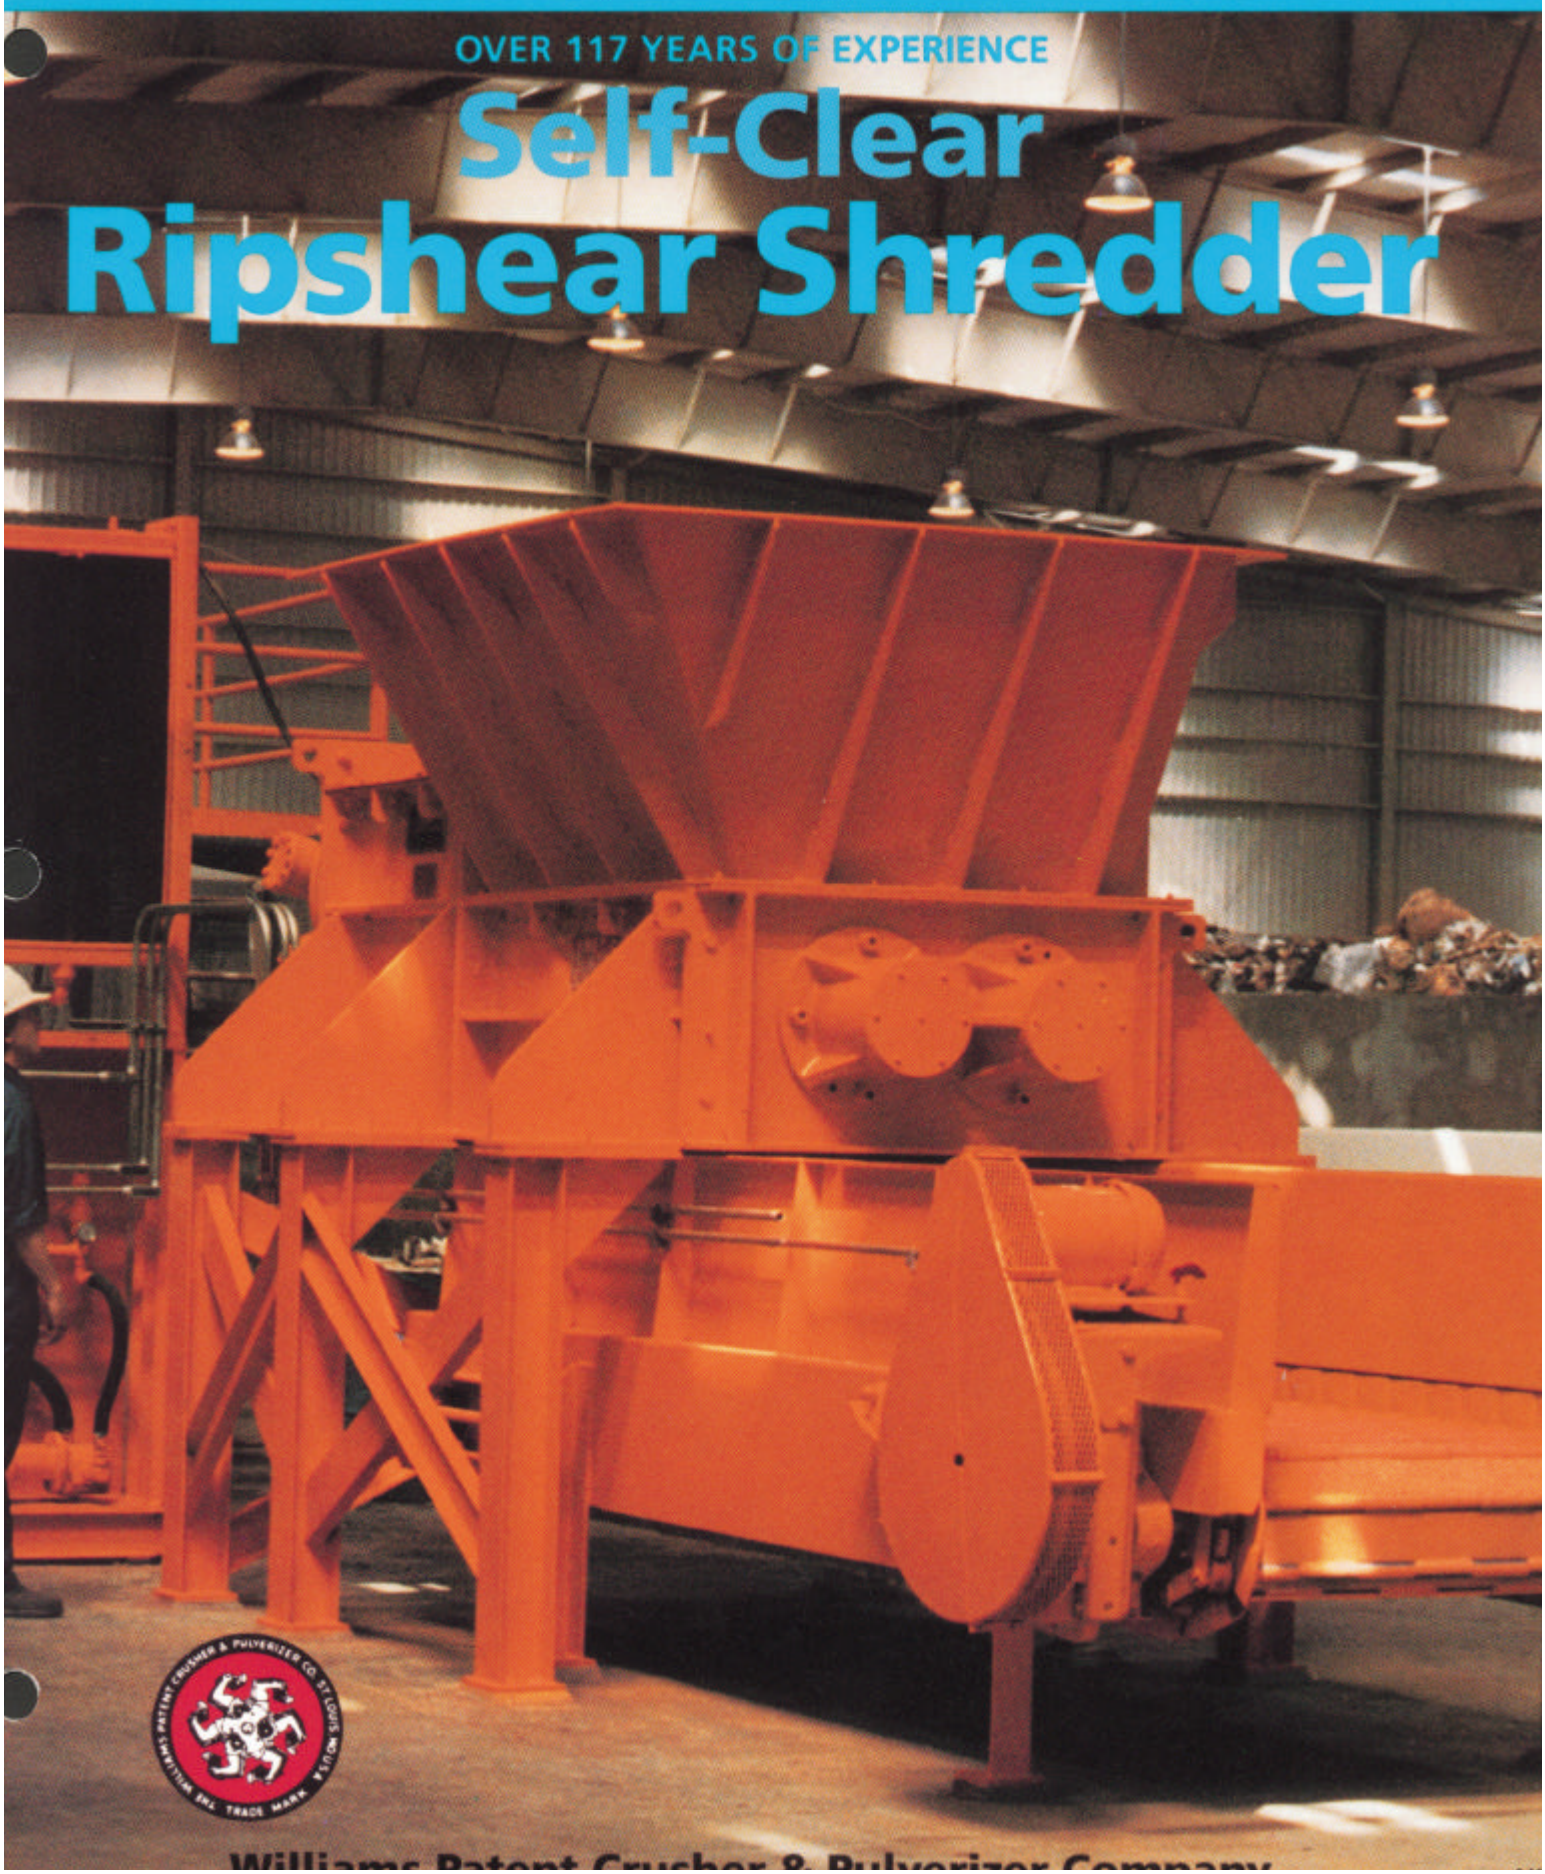

Williams Patent Crusher & Pulverizer Company

Advantages of Standard Ripshear Shredders

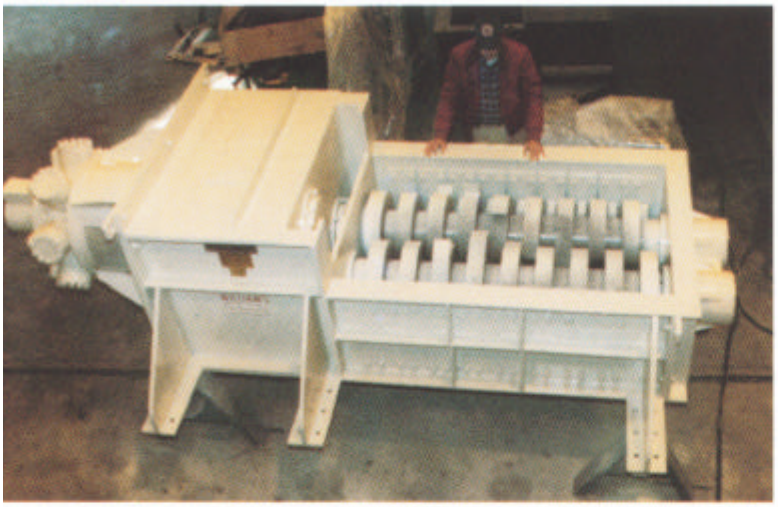

Low Horsepower

Low speed coupled with high torque hydraulic drive to reduce power requirements for certain jobs.

Easy, Low Cost Installation

Only minimal foundation of normal concrete slab, or equal leg support, required.

Low Maintenance

ugged construction plus automatic unjamming :tion through rotor reversal and resetting to minimize ıutdowns.

Low Hazard


ow speed does not create high windage and ignition ources found in high speed shredders; minimizes fires ıd explosions.


Environmentally Safe

hearing action is quiet; creates little or no dust.

Gear Box

orged billet spur gears are supported on either side bearings to prevent transfer of gear separating loads hydraulic drive motor bearings.

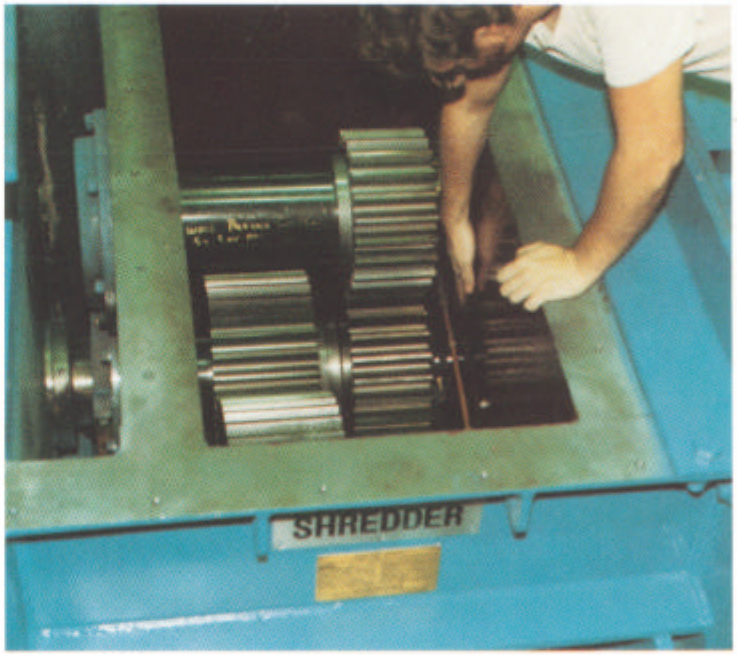

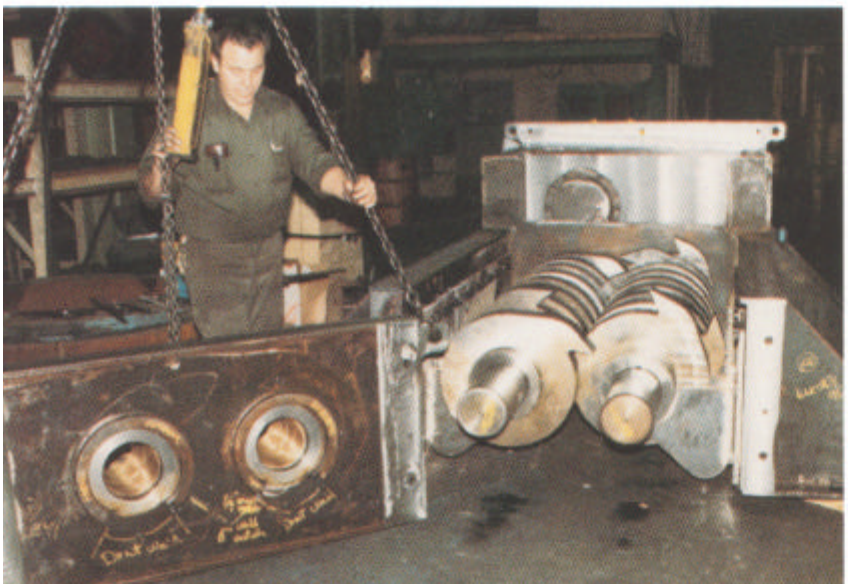

Ease of Accessibility

Bushings allow pull out and removal of front cover exposing shafts and cutter disks for maintenance without disassembling bearings. Shafts are fully supported at other end by double row, self aligning spherical roller bearings.

Open Bottom

Permits maximum throughput with product size controlled by disk size and tooth pattern.

Other Features

Large feed opening. Removable hopper section. Oversized bearings and shafts. Heavy-duty construction throughout, and

Shear Shredders
MSW/OBW

Ripshear™ Shredders

The Williams patented control system is independant of motor current or hydraulic pressure spikes that cause needless reversals. Onboard programmable computer* detects jams via actual shaft stoppage, permitting continuous operation at full hydraulic pressure without reversals.



Williams offers a full range of custom designed cutting discs, tailored for you particular application.


* Programmable, onboard computer provides sel clearing and self-discharge of uncrushables plu materials flow control.

View of Ripshear with feed hopper removed shows counter-rotating, meshed disc cutters that effectively shred MSW/OBW.





Williams system supplied to shred OBW at a refuse to energy facility.

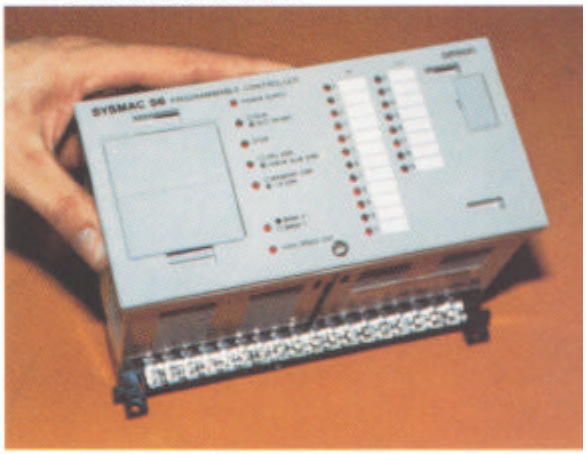

Programmable Computer

*As an exclusive, the Williams Ripshea offers a compact, onboard computer tha detects a jam through actual shaft stoppag as opposed to the conventional, prese pressure limit. This permits continuou operation at *full pressure* without rever sals...an exclusive feature.* The programm able computer also adds the dimension o distributive control to the Ripshear.

Some other hydraulic systems on shredder will reverse when they arrive at ful operating pressure, even though the shred ding process may be continuing. This i tantamount to a motor coming up to full loa and then being reversed simply because it i at full load. With the Williams computer thi cannot occur and the Ripshear can utilize th full pressure capabilities of its hydraulic com ponents without reversing unless a tru mechanical jam develops.

Single Source for a Reduction System

Williams can engineer and build a reduction system to your specific needs with full responsibility. As shown here, a typical system could include:

- Custom Designed Infeed Hopper
- Ripshear Shredder
- Williams Century Mark Apron Pan Discharge Conveyor.




Typical installation of large Ripshear and Williams apron pan conveyor.

The Right Ripshear for You



Let us show you how all the many features of the Ripshear can be personalized to your specific needs in our Customer Service Laboratory, consisting of a complete test-run facility and a CAD/CAM computer-backed engineering department. Contact your Williams representative for details. Or write direct.


As you read about our products in this brochure, please remember we have a CAD/CAM backed engineering department that stands ready to help you meet any specific waste processing needs and objectives.

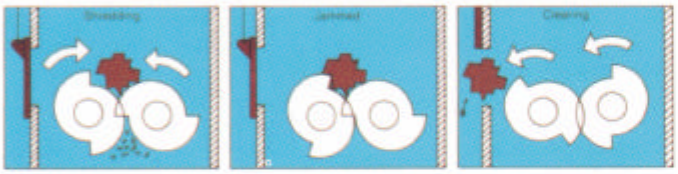


Exclusive side discharge**

permits automatic removal of uncrushables after detection of jams. A side door opens and the rotor nearest the door reverses to convey uncrushables out of chamber.

**Pat. No. 4,529,134

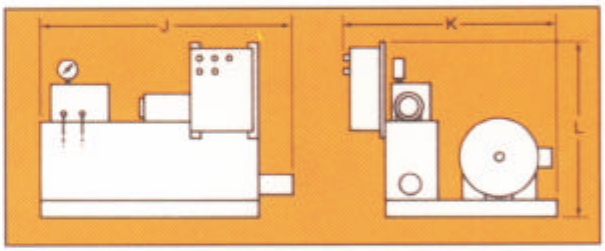

HYDRAULIC POWER UNIT

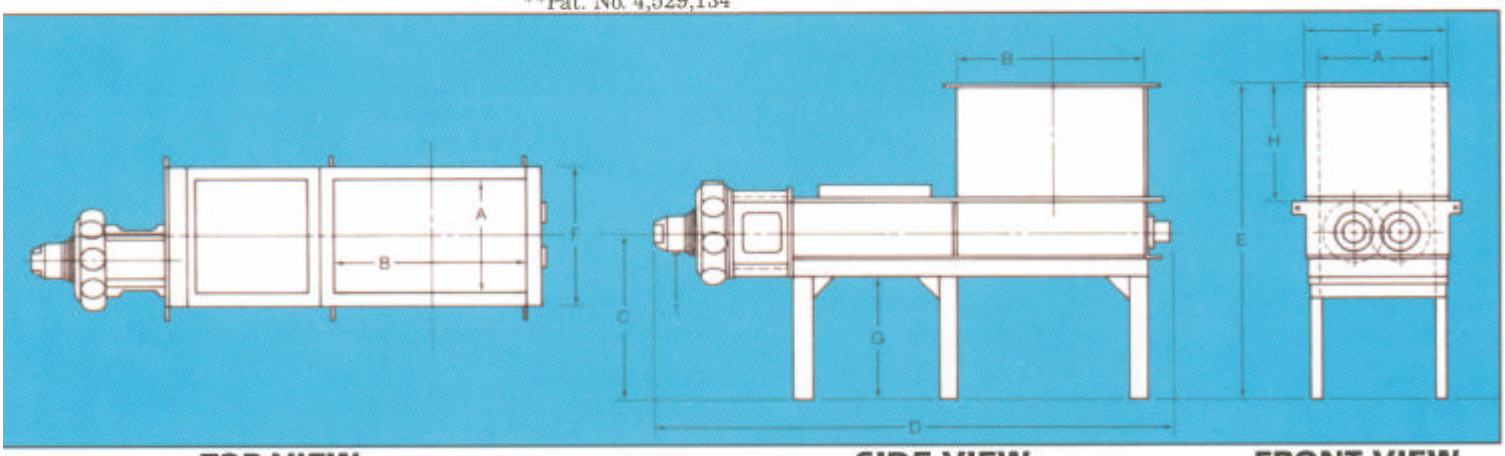

TOP VIEW SIDE VIEW FRONT VIEW

HP-Size	A (in./mm)	B (in./mm)	C (in./mm)	D (in./mm)	E (in./mm)	F (in./mm)	G (in./mm)	H (in./mm)	J (in./mm)	K (in./mm)	L (in./mm)	Total Wt (lb/kg)	Motor (hp/rpm)
50-2438	24/ 610	38/ 965	40/ 1016	116/ 2946	82/ 2083	30/ 762	34/ 864	36/ 914	54/ 1372	61/ 1549	54/ 1372	12,000/ 5,443	(1) 50/ 1800
100-3456	34/ 864	56/ 1422	51/ 1295	159/ 4039	96/ 2438	42½/ 1080	36/ 914	36/ 914	76/ 1930	65/ 1651	54/ 1372	19,000/ 8,618	(1) 100/ 1200
100-3464	34/ 864	64/ 1626	51/ 1295	170/ 4318	96/ 2438	42½/ 1080	36/ 914	36/ 914	76/ 1930	65/ 1651	54/ 1372	20,000/ 9,072	(1) 100/ 1200
150-3456	34/ 864	56/ 1422	51/ 1295	159/ 4039	96/ 2438	42½/ 1080	36/ 914	36/ 914	78/ 1981	71/ 1803	68/ 1727	21,000/ 9,526	(1) 150/ 1800
150-3464	34/ 864	64/ 1626	51/ 1295	170/ 4318	96/ 2438	42½/ 1080	36/ 914	36/ 914	78/ 1981	71/ 1803	68/ 1727	22,000/ 9,979	(1) 150/ 1800
300-4874	48/ 1219	74/ 1880	51/ 1295	210/ 5334	114/ 2896	58/ 1473	36/ 914	48/ 1219	84/ 2134	84/ 2134	68/ 1727	43,000/ 19,505	(2) 150/ 1800
600-4874	48/ 1219	74/ 1880	51/ 1295	210/ 5334	114/ 2896	58/ 1473	36/ 914	48/ 1219	168/ 4267	168/ 4267	68/ 1727	48,000/ 21,773	(4) 150/ 1800