

Salience target | Hypothetical rMT: 50% MSO

SM-Hand Target

C-B60 coil | 50% MSO rMT example

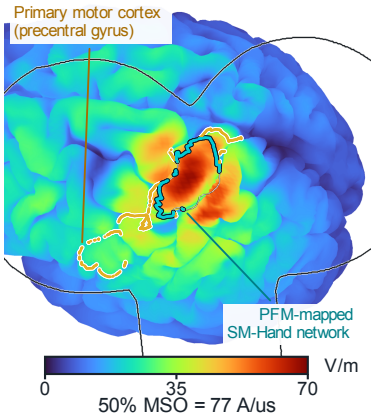


Motor E-field distribution

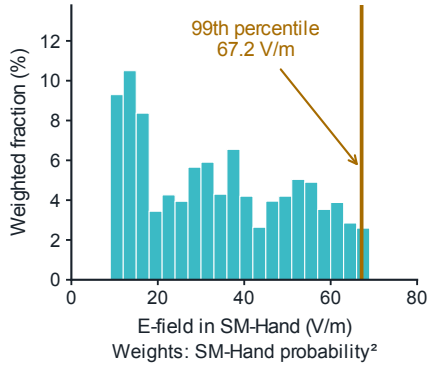

Same cutoff at every SAL intensity

SAL intensity selection

Fixed motor-derived cutoff: 67.16 V/m

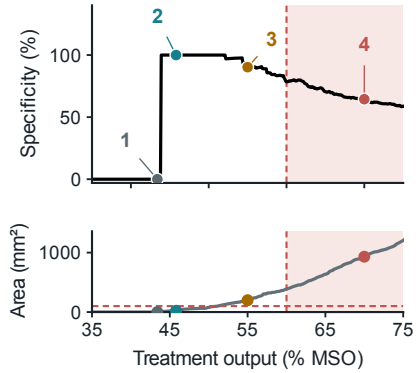

Minimum 100 mm²; ceiling 60% MSO

1 Below onset

43.4% MSO




No hotspot

Below fixed cutoff

2 Specific but small

45.8% MSO




100.0% target | 21.1 mm²

Below area minimum

3 Treatment intensity

55.0% MSO




90.3% target | 199.1 mm²

Specificity-area balance

4 Excess spread

70.0% MSO

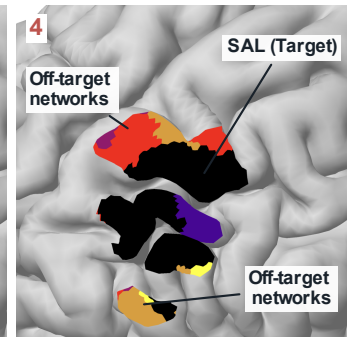

64.5% target | 931.0 mm²

Above output ceiling

Illustrative SAL target; modeled cortical exposure, not measured effects.