

PORTLAND, OREGON

AL-330 (FAA)

24025

APP CRS	Rwy Idg	9290
283°	TDZE	31
	Apt Elev	31

RNAV (RNP) Y RWY 28R

PORTLAND INTL (PDX)

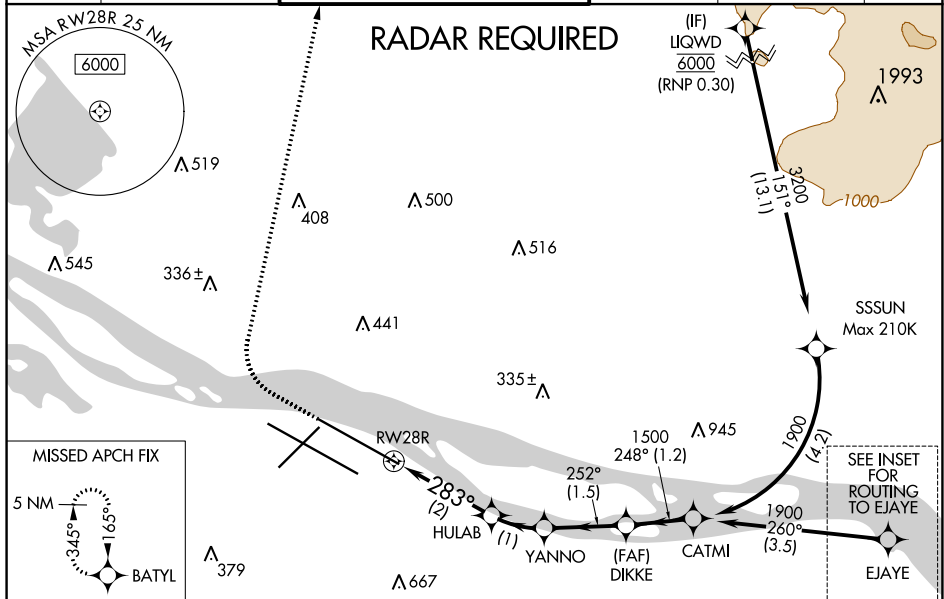
▼ For uncompensated Baro-VNAV systems, procedure NA below -7°C (20°F) or above 54°C (130°F). For inop MALS, increase RNP 0.20 all Cats visibility to 1 1/4 mile, and increase RNP 0.30 all Cats visibility to 1 1/2 mile. RF required. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized with Rwy 28L.

MALSR



MISSED APPROACH:
Climb to 600 then climbing
right turn to 4400 direct
BATYL and hold, continue
climb-in-hold to 4400.

D-ATIS 128.35 269.9	PORTLAND APP CON 124.35 299.2	PORTLAND TOWER Rwy 10L-28R Rwys 3-21, 10R-28L 118.7 257.8 123.775 251.125		GND CON 121.9 348.6	CLNC DEL 120.125 318.1	CPDLC
---------------------------	----------------------------------	---------------------------------------------------------------------------------	--	------------------------	---------------------------	-------

[illegible]

PORTLAND, OREGON

Amdt 2 25JUN15

PORTLAND INTL (PDX)

45°35'N-122°36'W

RNAV (RNP) Y RWY 28R

NW-1, 13 JUN 2024 to 11 JUL 2024