








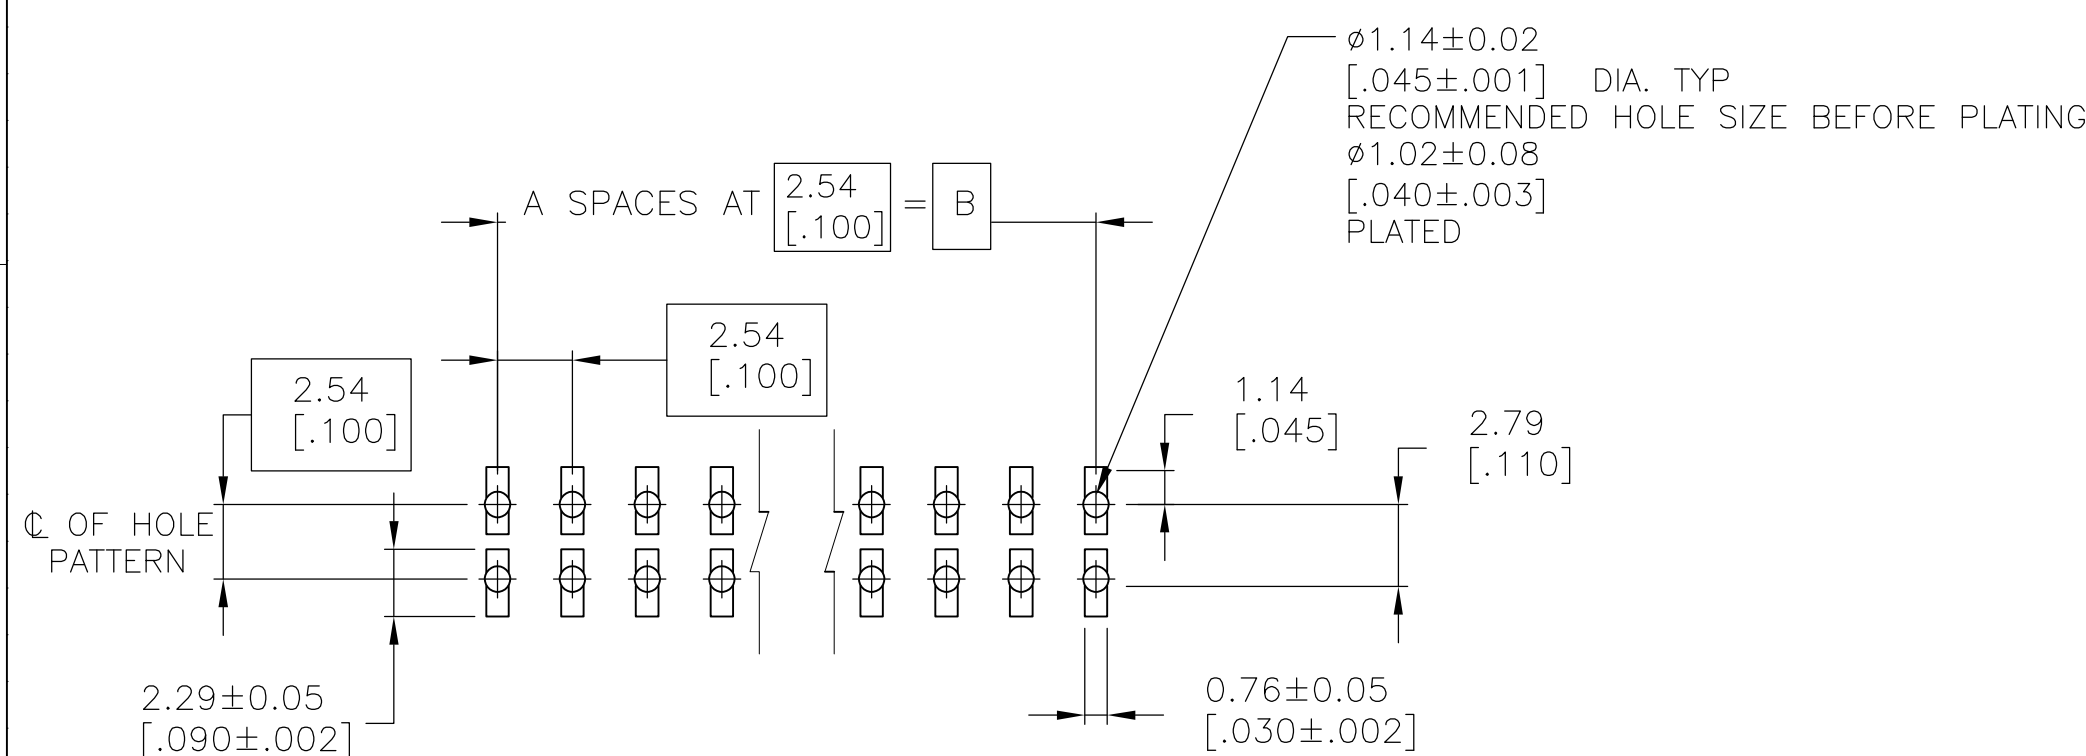

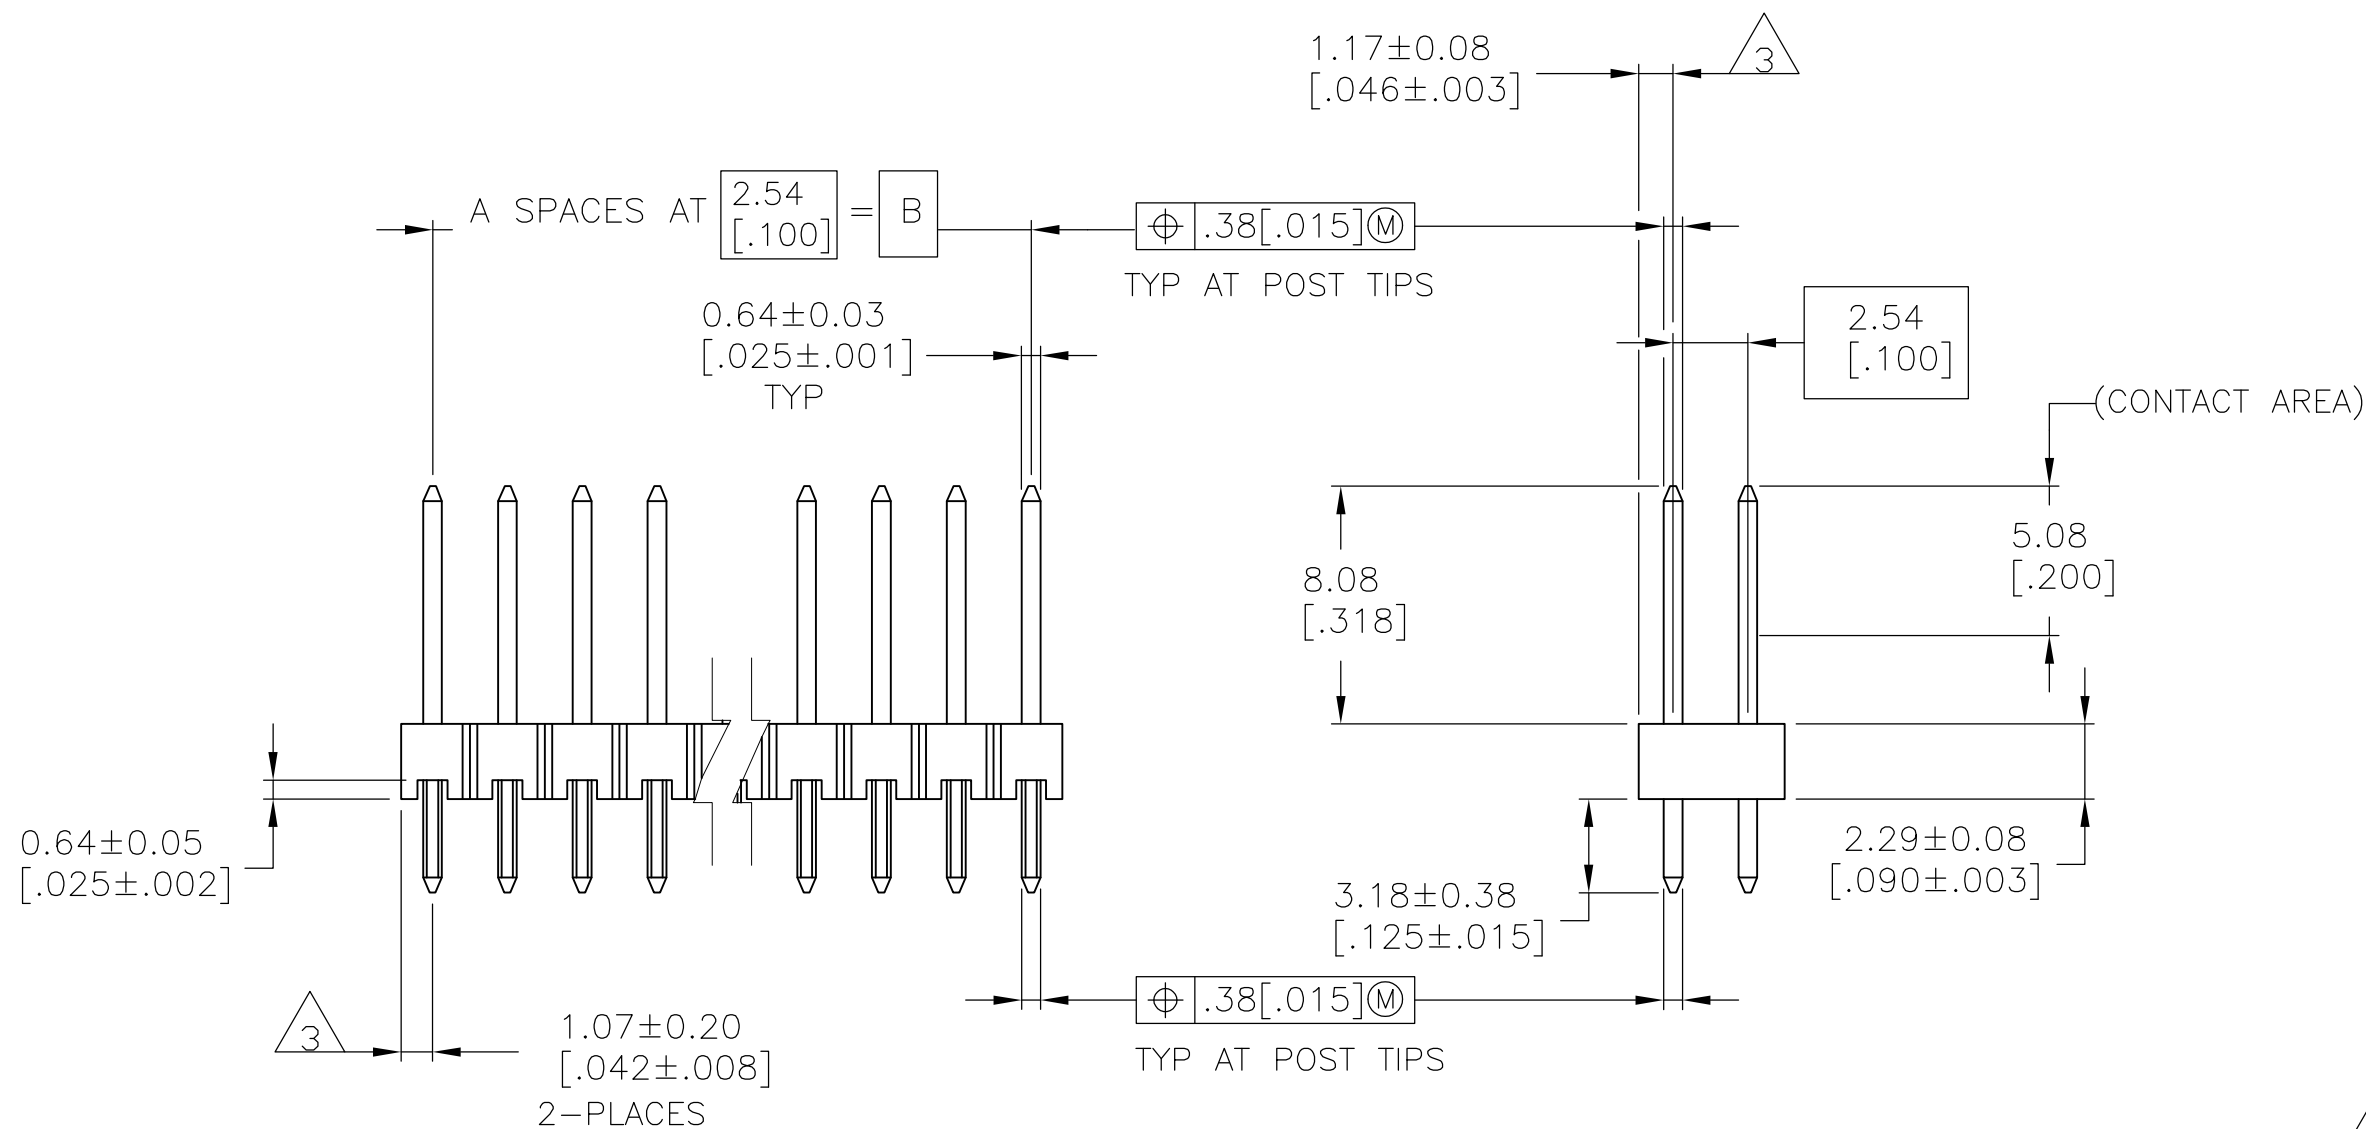

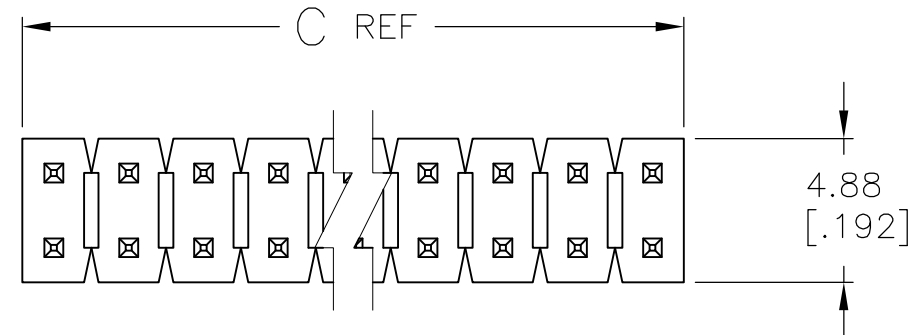























































































- | | |
|----|--|
| 3 | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING. |
| 4 | POST PLATING: 0.00762[.000030] GOLD ON CONTACT AREA,
0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD
ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL. |
| 5 | HOUSING: LCP, COLOR-BLACK. |
| 6 | POST: PHOSPHOR BRONZE |
| 7 | POST PLATING: 0.00762[.000030] GOLD ON CONTACT AREA,
0.00254-0.00508[.000100-.000200] MATTE TIN
ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL. |
| 8 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION |
| 9 | OBSOLETE P/N |
| 10 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |



RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK

A)	OBSOLETE			101.19 [3.984]	99.06 [3.900]	39	80	9-146253-0
			98.65 [3.884]	96.52 [3.800]	38	78	8-146253-9	
			96.11 [3.784]	93.98 [3.700]	37	76	8-146253-8	
			93.57 [3.684]	91.44 [3.600]	36	74	8-146253-7	
			91.03 [3.584]	88.90 [3.500]	35	72	8-146253-6	
			88.49 [3.484]	86.36 [3.400]	34	70	8-146253-5	
			85.95 [3.384]	83.82 [3.300]	33	68	8-146253-4	
			83.41 [3.284]	81.28 [3.200]	32	66	8-146253-3	
			80.87 [3.184]	78.74 [3.100]	31	64	8-146253-2	
			78.33 [3.084]	76.20 [3.000]	30	62	8-146253-1	
			75.79 [2.984]	73.66 [2.900]	29	60	8-146253-0	
			73.25 [2.884]	71.12 [2.800]	28	58	7-146253-9	
			70.71 [2.784]	68.58 [2.700]	27	56	7-146253-8	
			68.17 [2.684]	66.04 [2.600]	26	54	7-146253-7	
			65.63 [2.584]	63.5 [2.500]	25	52	7-146253-6	
			63.09 [2.484]	60.96 [2.400]	24	50	7-146253-5	
			60.55 [2.384]	58.42 [2.300]	23	48	7-146253-4	
			58.01 [2.284]	55.88 [2.200]	22	46	7-146253-3	
			55.47 [2.184]	53.34 [2.100]	21	44	7-146253-2	
			52.93 [2.084]	50.80 [2.000]	20	42	7-146253-1	
		50.39 [1.984]	48.26 [1.900]	19	40	7-146253-0		
	OBSOLETE			47.85 [1.884]	45.72 [1.800]	18	38	6-146253-9
			45.31 [1.784]	43.18 [1.700]	17	36	6-146253-8	
			42.77 [1.684]	40.64 [1.600]	16	34	6-146253-7	
		OBSOLETE		40.23 [1.584]	38.10 [1.500]	15	32	6-146253-6
		OBSOLETE		37.69 [1.484]	35.56 [1.400]	14	30	6-146253-5
		OBSOLETE		35.15 [1.384]	33.02 [1.300]	13	28	6-146253-4
		OBSOLETE		32.61 [1.284]	30.48 [1.200]	12	26	6-146253-3
		OBSOLETE		30.07 [1.184]	27.94 [1.100]	11	24	6-146253-2
	OBSOLETE		27.53 [1.084]	25.40 [1.000]	10	22	6-146253-1	
			24.99 [.984]	22.86 [.900]	9	20	6-146253-0	
			22.45 [.884]	20.32 [.800]	8	18	5-146253-9	
			19.91 [.784]	17.78 [.700]	7	16	5-146253-8	
		17.37 [.684]	15.24 [.600]	6	14	5-146253-7		
	OBSOLETE		14.83 [.584]	12.70 [.500]	5	12	5-146253-6	
		12.29 [.484]	10.16 [.400]	4	10	5-146253-5		
		9.75 [.384]	7.62 [.300]	3	8	5-146253-4		
	OBSOLETE		7.21 [.284]	5.08 [.200]	2	6	5-146253-3	
		4.67 [.184]	2.54 [.100]	1	4	5-146253-2		
		-	-	0	2	5-146253-1		
		PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	

			19.91 [.784]	17.78 [.700]	7	16		4-146253-3	
			12.29 [.484]	10.16 [.400]	4	10		4-146253-2	
			101.19 [3.984]	99.06 [3.900]	39	80		4-146253-1	
			101.19 [3.984]	99.06 [3.900]	39	80		4-146253-0	
		 OBSOLETE	98.65 [3.884]	96.52 [3.800]	38	78		3-146253-9	
			96.11 [3.784]	93.98 [3.700]	37	76		3-146253-8	
			93.57 [3.684]	91.44 [3.600]	36	74		3-146253-7	
			91.03 [3.584]	88.90 [3.500]	35	72		3-146253-6	
			88.49 [3.484]	86.36 [3.400]	34	70		3-146253-5	
			85.95 [3.384]	83.82 [3.300]	33	68		3-146253-4	
			83.41 [3.284]	81.28 [3.200]	32	66		3-146253-3	
			80.87 [3.184]	78.74 [3.100]	31	64		3-146253-2	
				78.33 [3.084]	76.20 [3.000]	30	62		3-146253-1
				75.79 [2.984]	73.66 [2.900]	29	60		3-146253-0
		 OBSOLETE	73.25 [2.884]	71.12 [2.800]	28	58		2-146253-9	
			70.71 [2.784]	68.58 [2.700]	27	56		2-146253-8	
			68.17 [2.684]	66.04 [2.600]	26	54		2-146253-7	
			65.63 [2.584]	63.5 [2.500]	25	52		2-146253-6	
			63.09 [2.484]	60.96 [2.400]	24	50		2-146253-5	
			60.55 [2.384]	58.42 [2.300]	23	48		2-146253-4	
			58.01 [2.284]	55.88 [2.200]	22	46		2-146253-3	
			55.47 [2.184]	53.34 [2.100]	21	44		2-146253-2	
			52.93 [2.084]	50.80 [2.000]	20	42		2-146253-1	
	SUP/BY 7-146253-0			50.39 [1.984]	48.26 [1.900]	19	40		2-146253-0
			 OBSOLETE	47.85 [1.884]	45.72 [1.800]	18	38		1-146253-9
				45.31 [1.784]	43.18 [1.700]	17	36		1-146253-8
				42.77 [1.684]	40.64 [1.600]	16	34		1-146253-7
	SUP/BY 6-146253-7		 OBSOLETE	40.23 [1.584]	38.10 [1.500]	15	32		1-146253-6
	SUP/BY 6-146253-5		 OBSOLETE	37.69 [1.484]	35.56 [1.400]	14	30		1-146253-5
		 OBSOLETE	35.15 [1.384]	33.02 [1.300]	13	28		1-146253-4	
	SUP/BY 6-146253-3	 OBSOLETE	32.61 [1.284]	30.48 [1.200]	12	26		1-146253-3	
		 OBSOLETE	30.07 [1.184]	27.94 [1.100]	11	24		1-146253-2	
	SUP/BY 6-146253-1		27.53 [1.084]	25.40 [1.000]	10	22		1-146253-1	
	SUP/BY 6-146253-0		24.99 [.984]	22.86 [.900]	9	20		1-146253-0	
		 OBSOLETE	22.45 [.884]	20.32 [.800]	8	18		146253-9	
	SUP/BY 5-146253-8		19.91 [.784]	17.78 [.700]	7	16		146253-8	
	SUP/BY 5-146253-7		17.37 [.684]	15.24 [.600]	6	14		146253-7	
		 OBSOLETE	14.83 [.584]	12.70 [.500]	5	12		146253-6	
			12.29 [.484]	10.16 [.400]	4	10		146253-5	
	SUP/BY 5-146253-4		9.75 [.384]	7.62 [.300]	3	8		146253-4	
	SUP/BY 5-146253-3		7.21 [.284]	5.08 [.200]	2	6		146253-3	
		 OBSOLETE	4.67 [.184]	2.54 [.100]	1	4		146253-2	
	SUP/BY 5-146253-1		-	-	0	2		146253-1	
	PLATING		C	B	A	NO. OF POSITIONS		PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. T. HOFFMAN 08-05-95 CHK. G. DUBNICKI 03-10-95 APP'D. G. DUBNICKI 03-10-95		 TE Connectivity	
DIMENSIONS: mm [INCHES] 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 P.L.C. ± 1 P.L.C. ± 2 P.L.C. ± 0.51[.02] 3 P.L.C. ± 0.127[.005] 4 P.L.C. ± 0.0127[.0005] FINISH: ANGLES		NAME:	
MATERIAL: HOUSING:  POST: 		PRODUCT SPEC: — APPLICATION SPEC: — WEIGHT: —		HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, HIGH TEMPERATURE	
POST: SEE TABLE		SIZE: A1		CAGE CODE: 100779	
		DRAWING NO: C146253		RESTRICTED TO: —	
		CUSTOMER DRAWING		SCALE: 4:1 SHEET 1 of 1 REV. H	