



LIMIT RESISTORS PROTECT SSM
THAT SAID, WOULDN'T BE A BAD IDEA TO SET SSM TO INPUT



COMMANDS SEND TO SPI_A

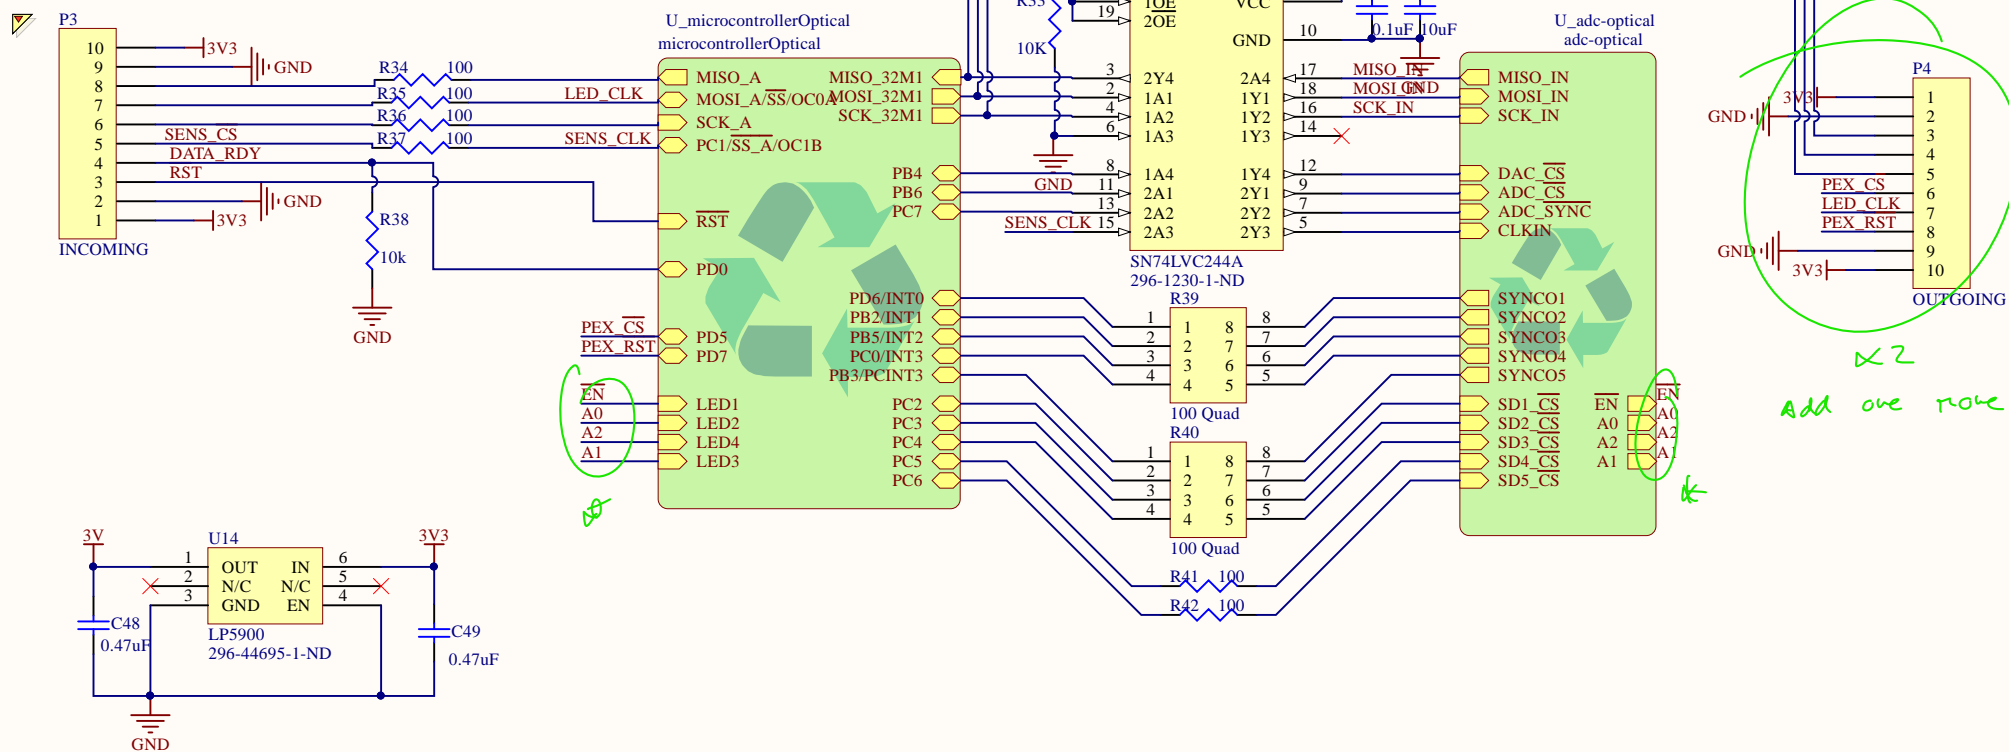


Title		
Size	Number	Revision
A4		
Date:	2018-05-20	Sheet of
File:	C:\Users\...\pay-optical.SchDoc	Drawn By:

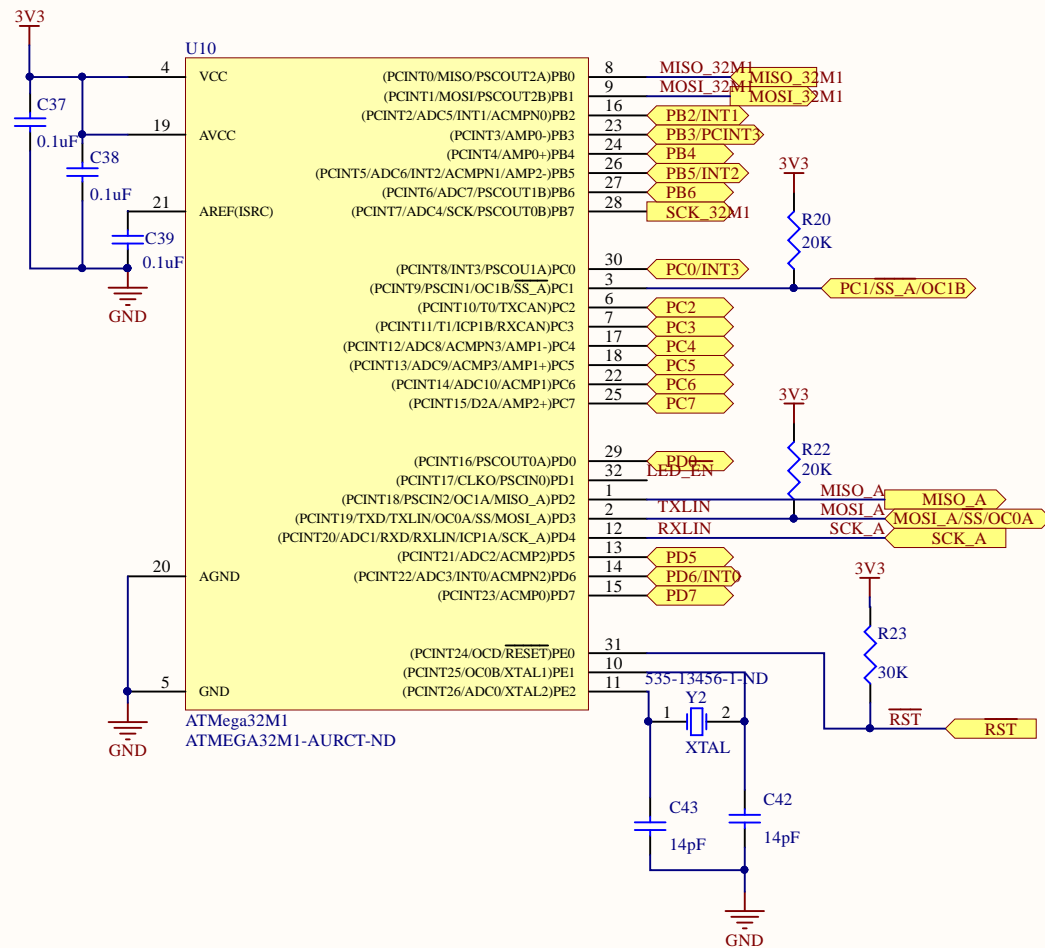


- Add small footprints for programming, debugging
- Connect new LED driver and connect disable switch
- Connect MUX monitoring to new header

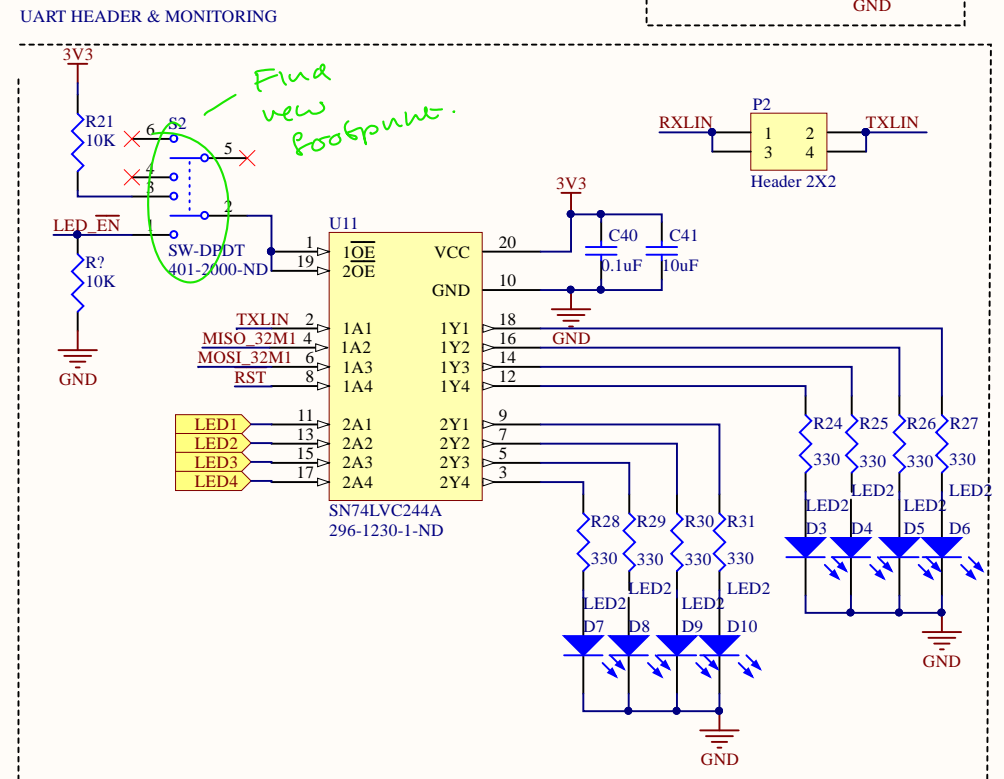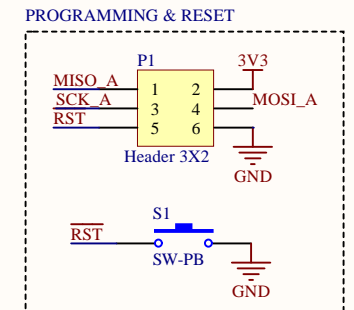


Title		
Size A4	Number	Revision
Date:	2018-05-20	Sheet of
File:	C:\Users\...\microcontrollerOptical.SchDoc	
	Drawn By:	

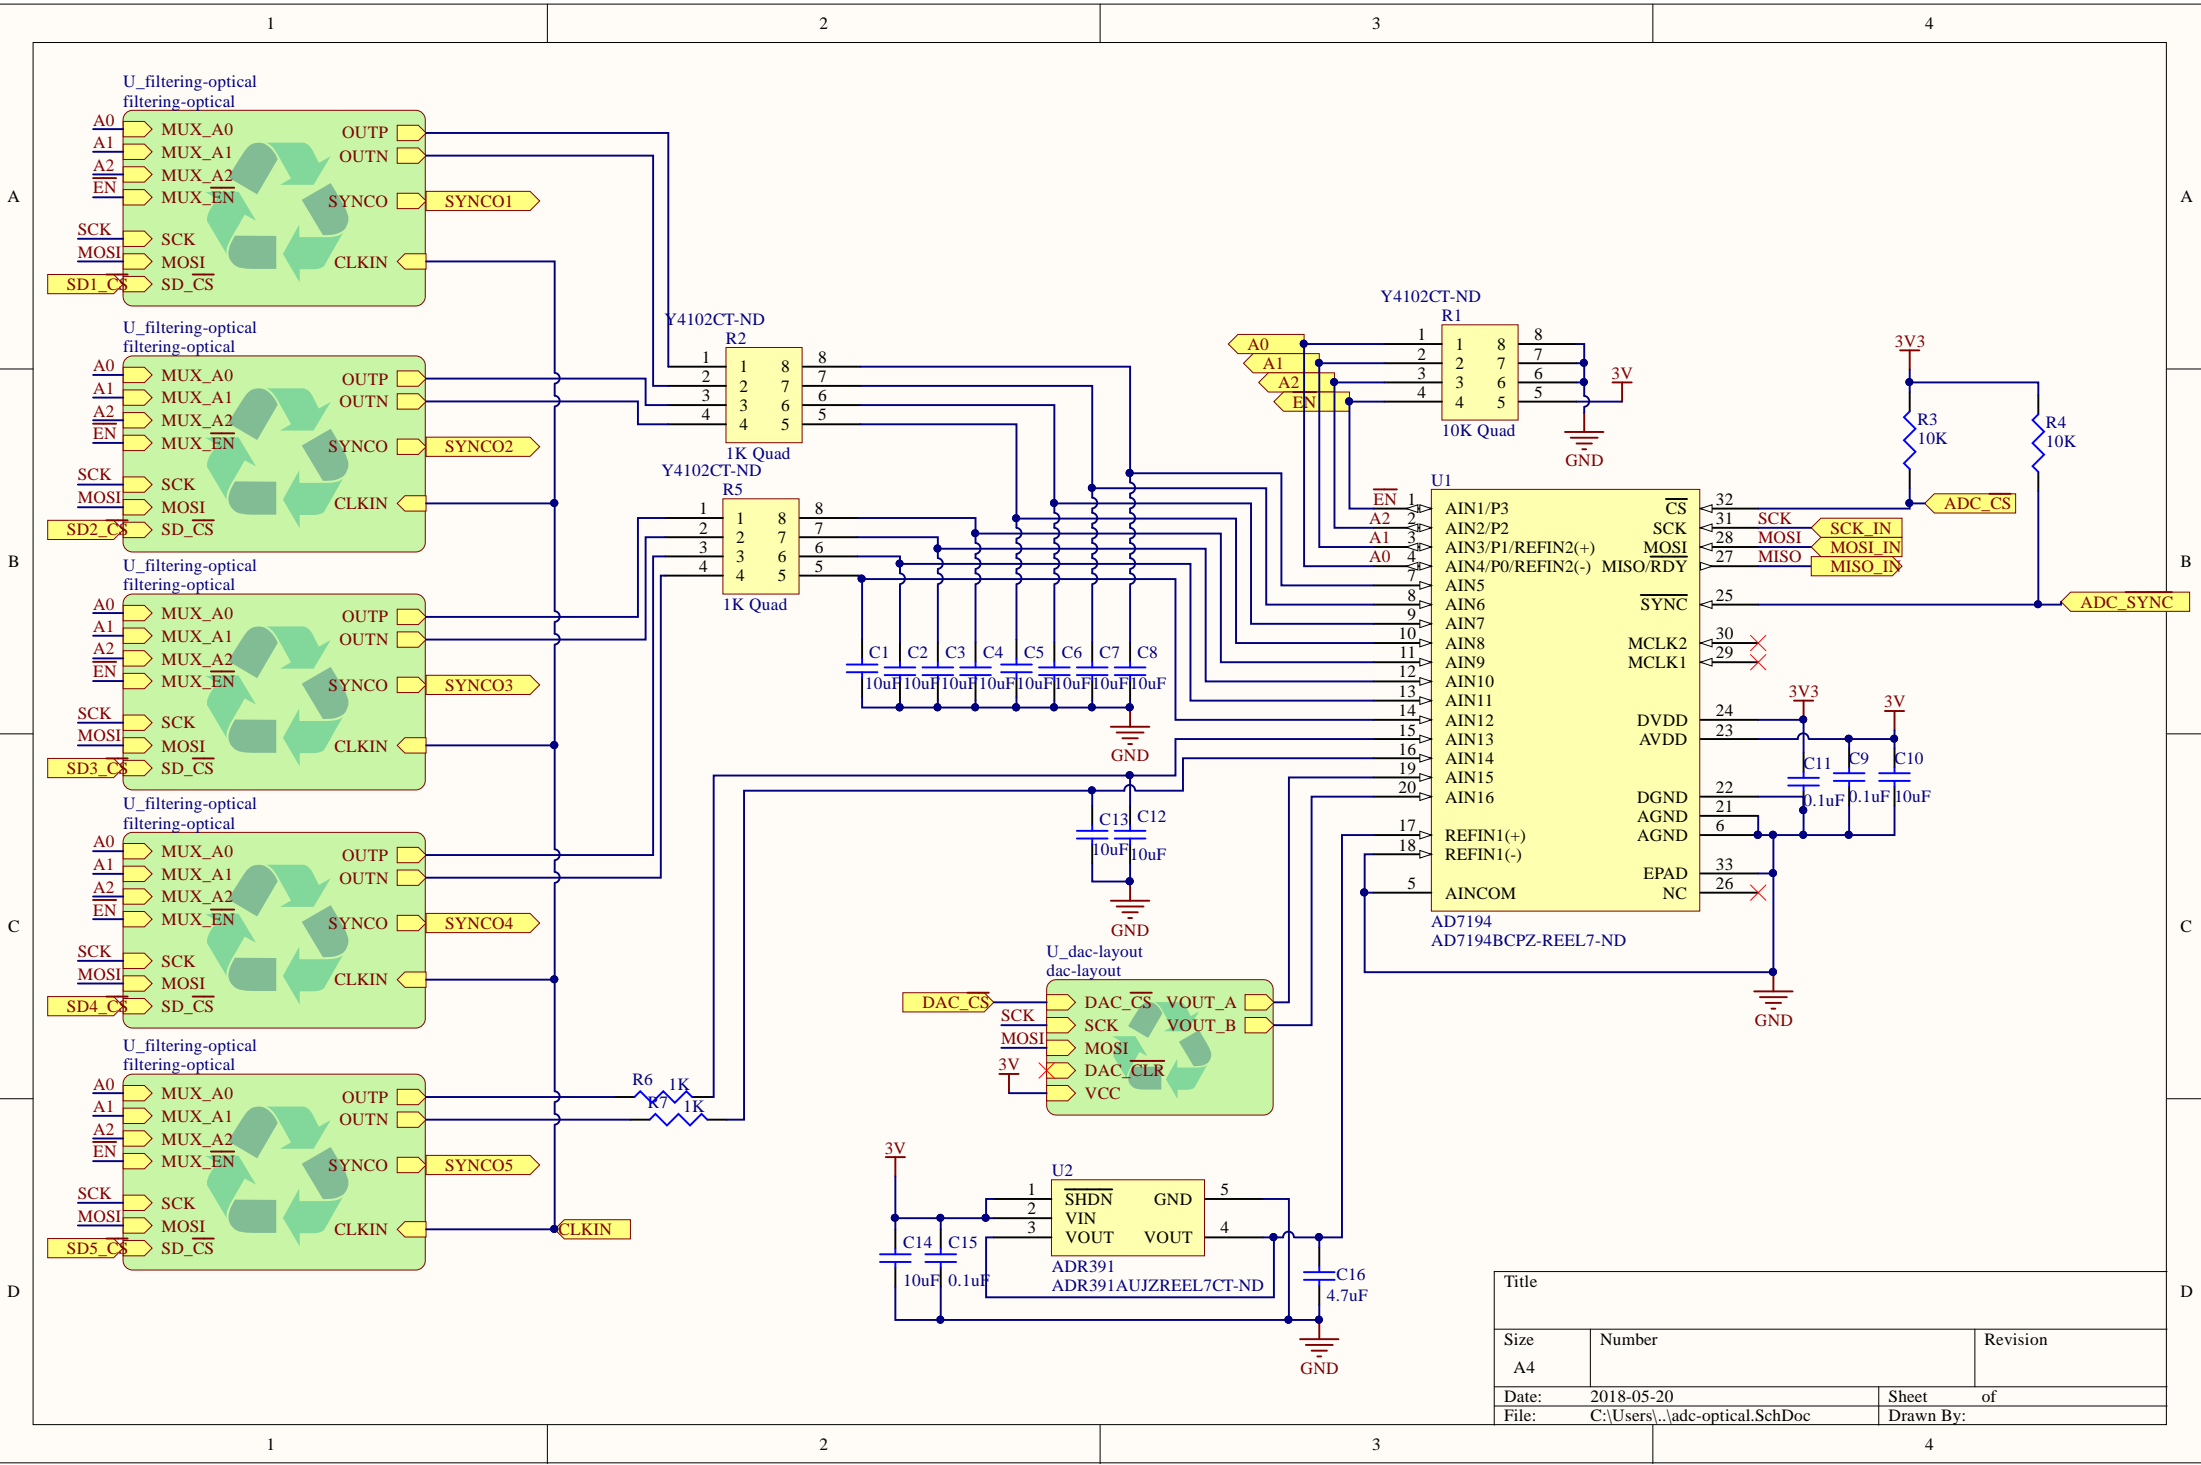


Title		
Size	Number	Revision
A4		
Date:	2018-05-20	Sheet of
File:	C:\Users\...\adc-optical.SchDoc	Drawn By:

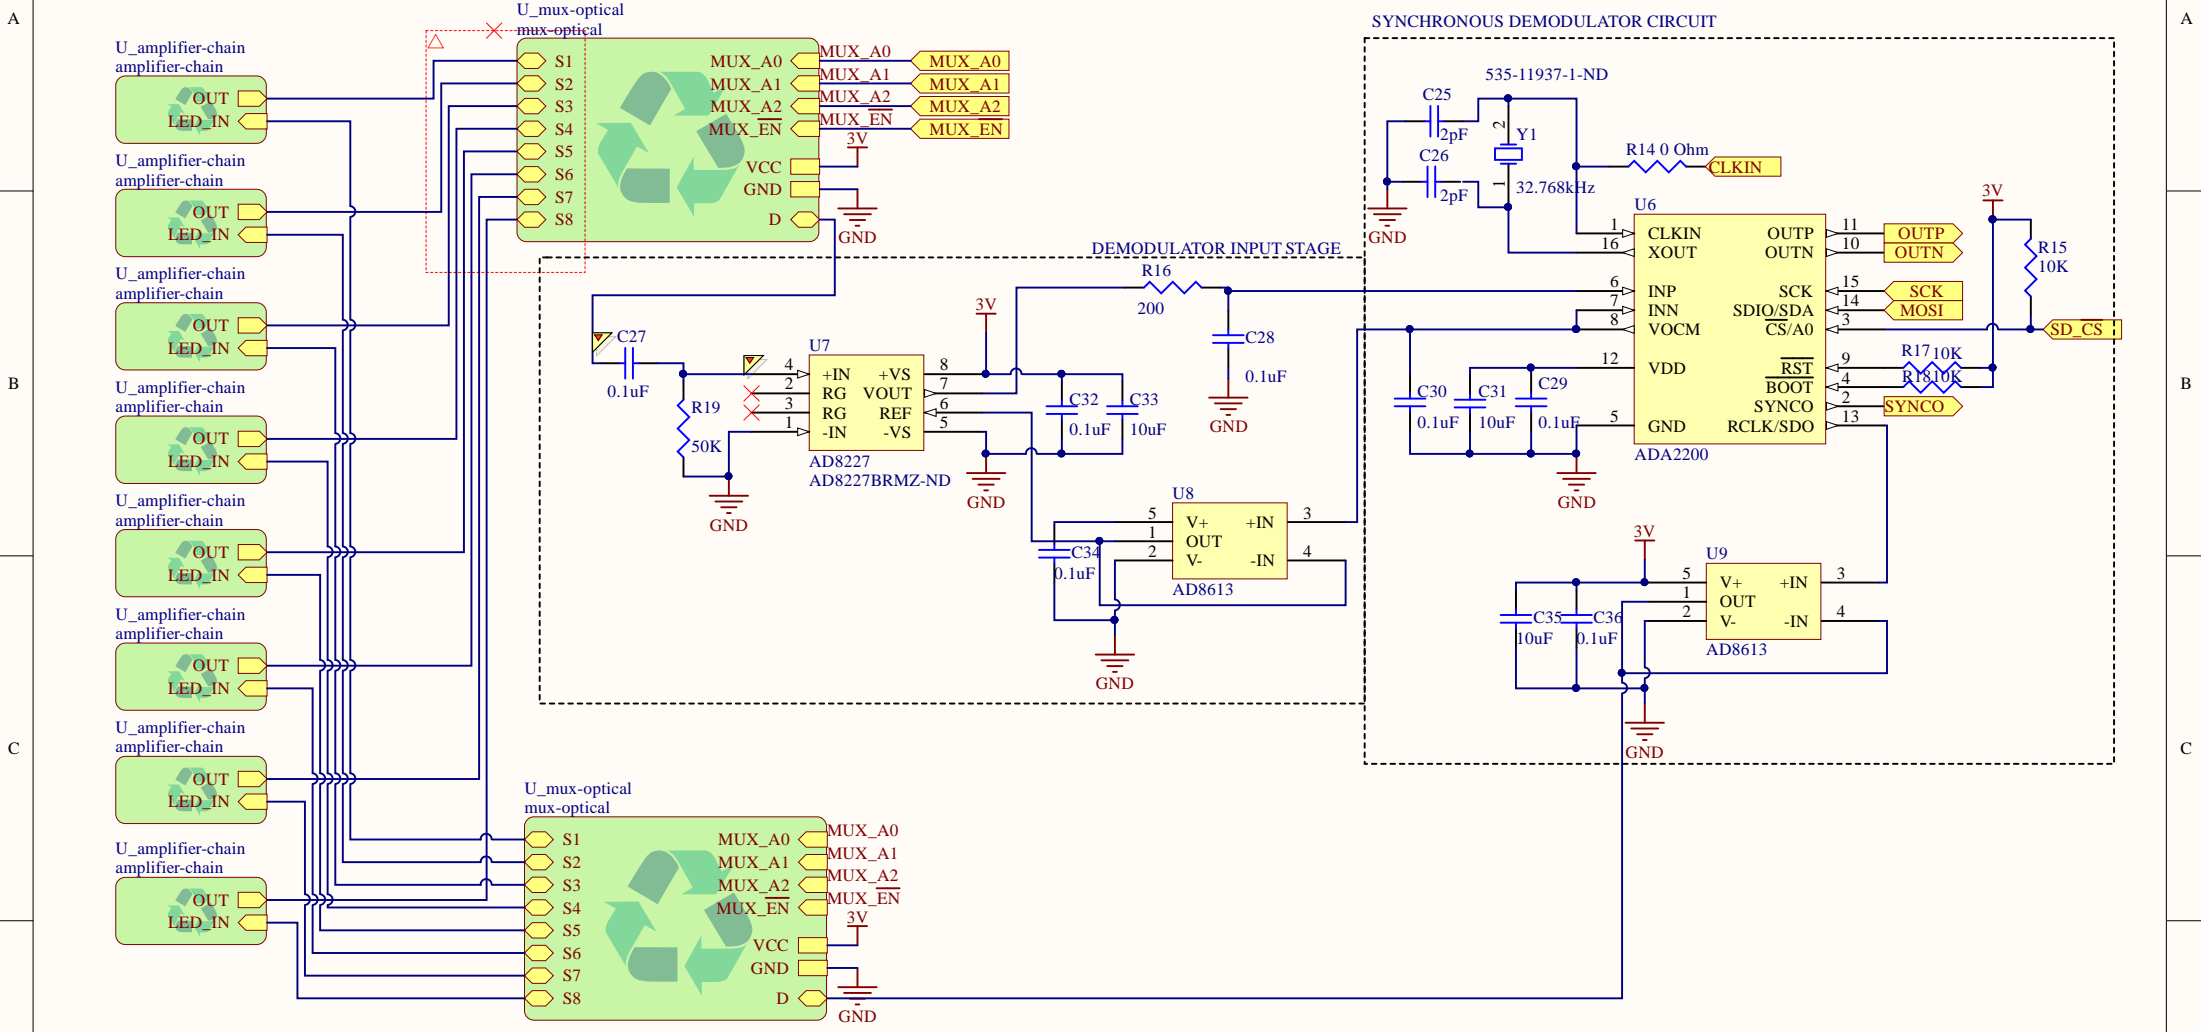

Title		
Size	Number	Revision
A4		
Date:	2018-05-20	Sheet of
File:	C:\Users\...\filtering-optical.SchDoc	Drawn By:

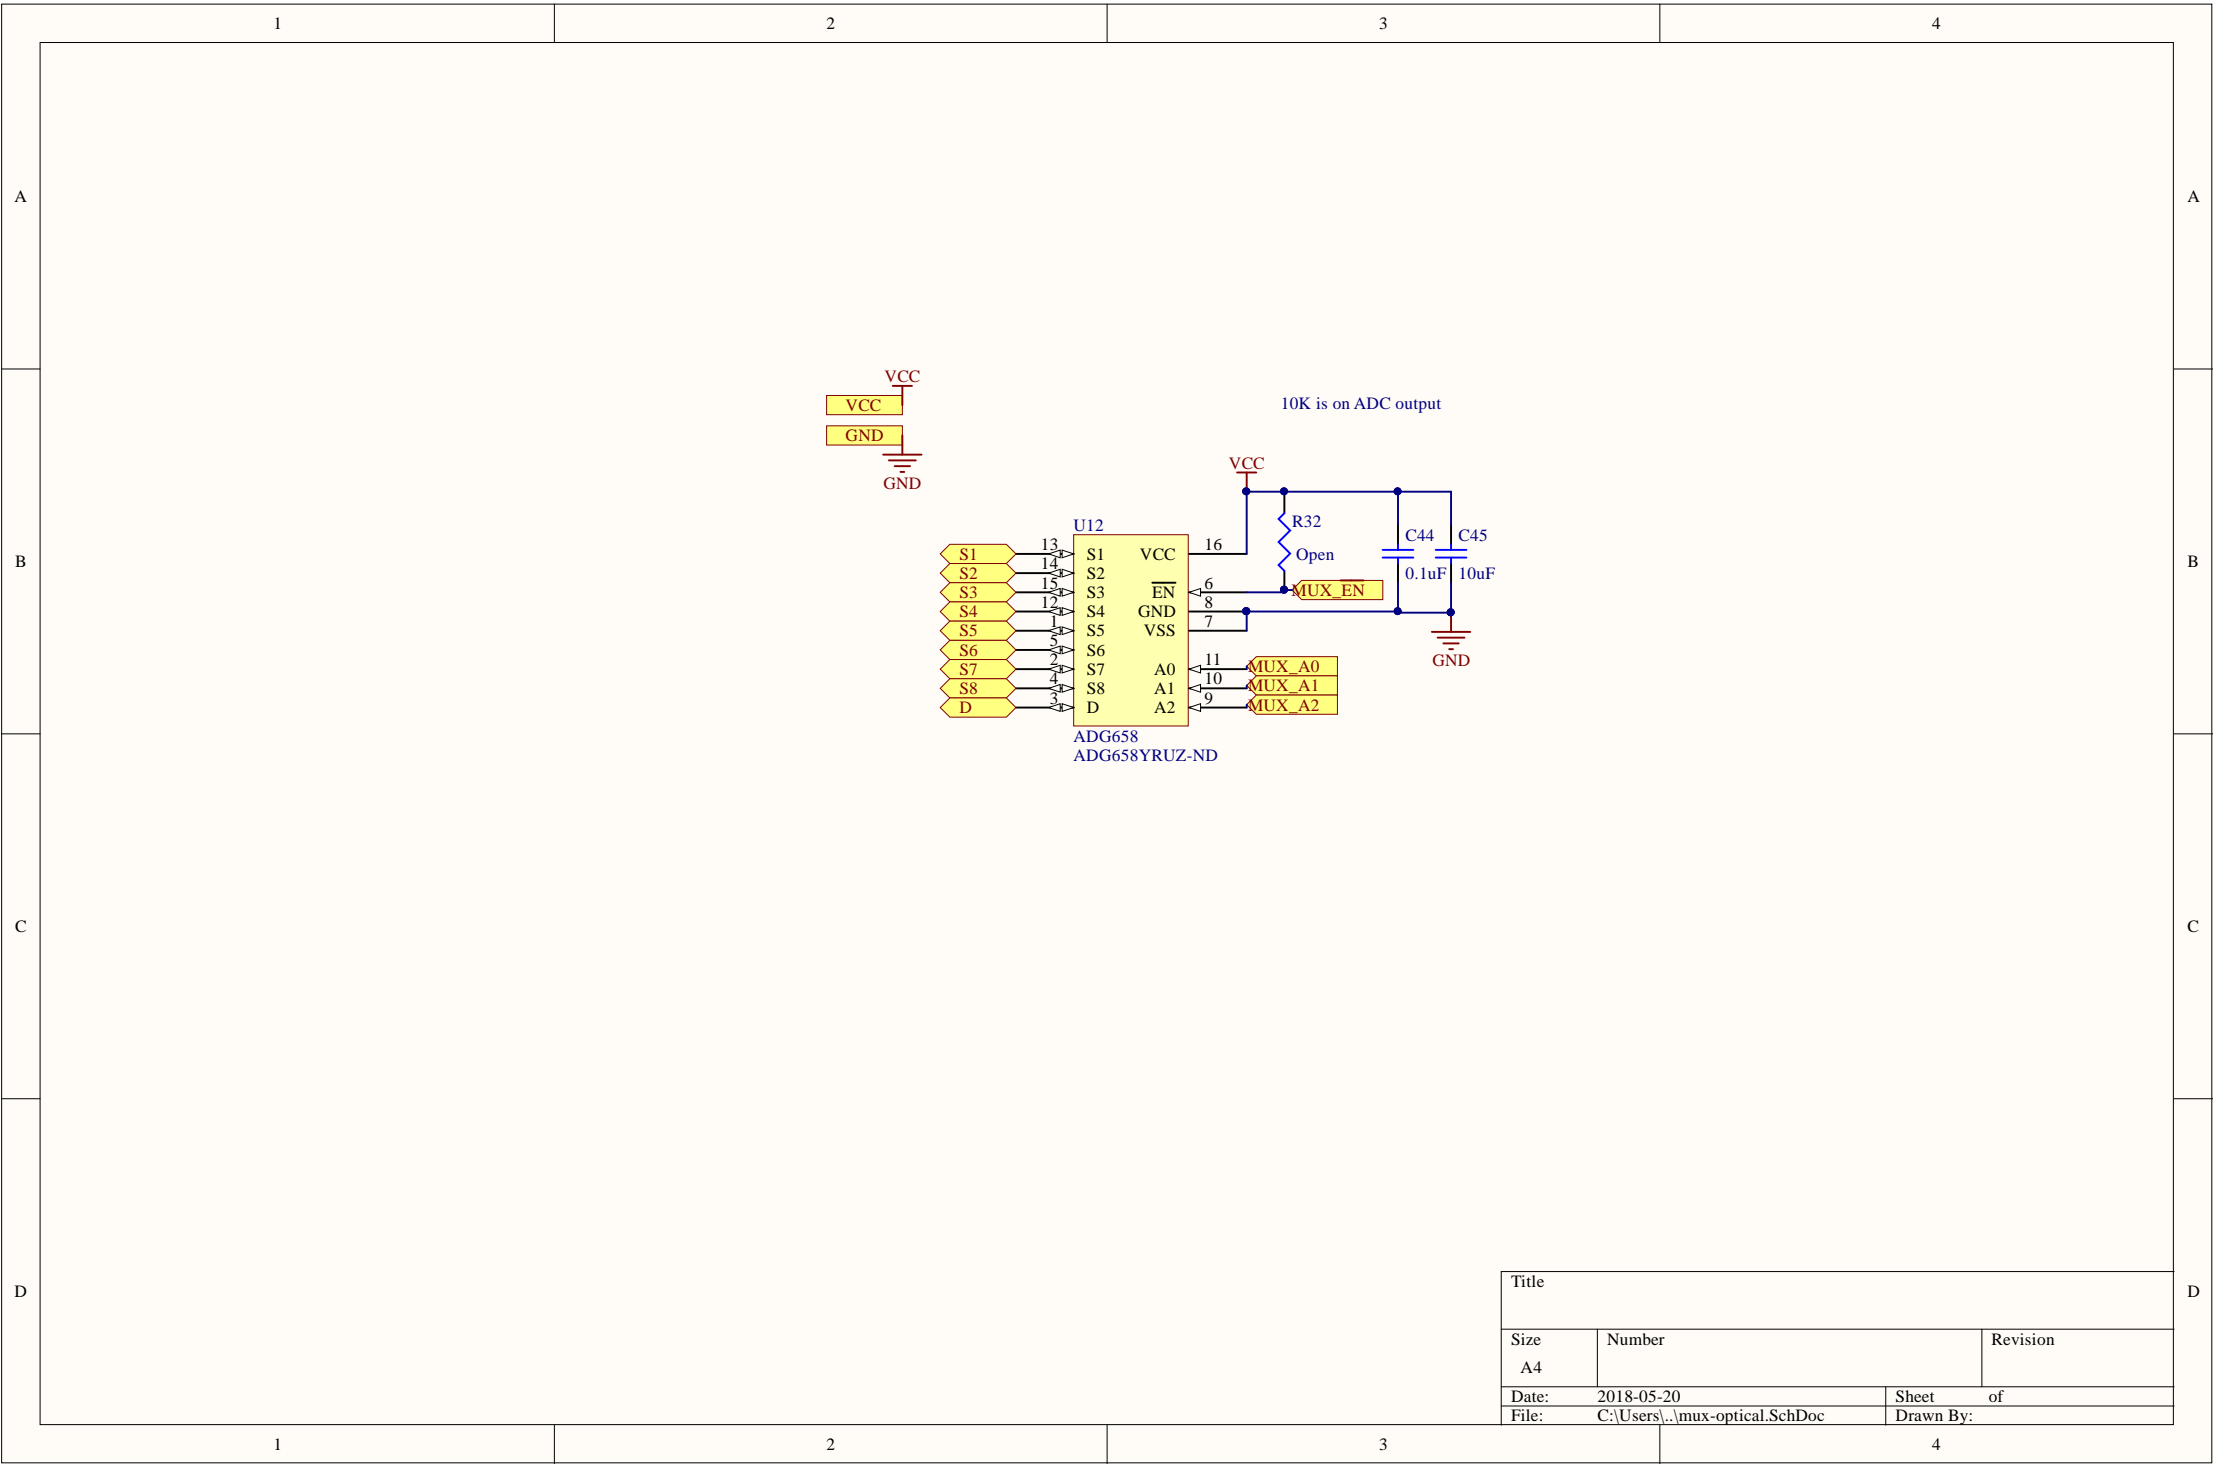

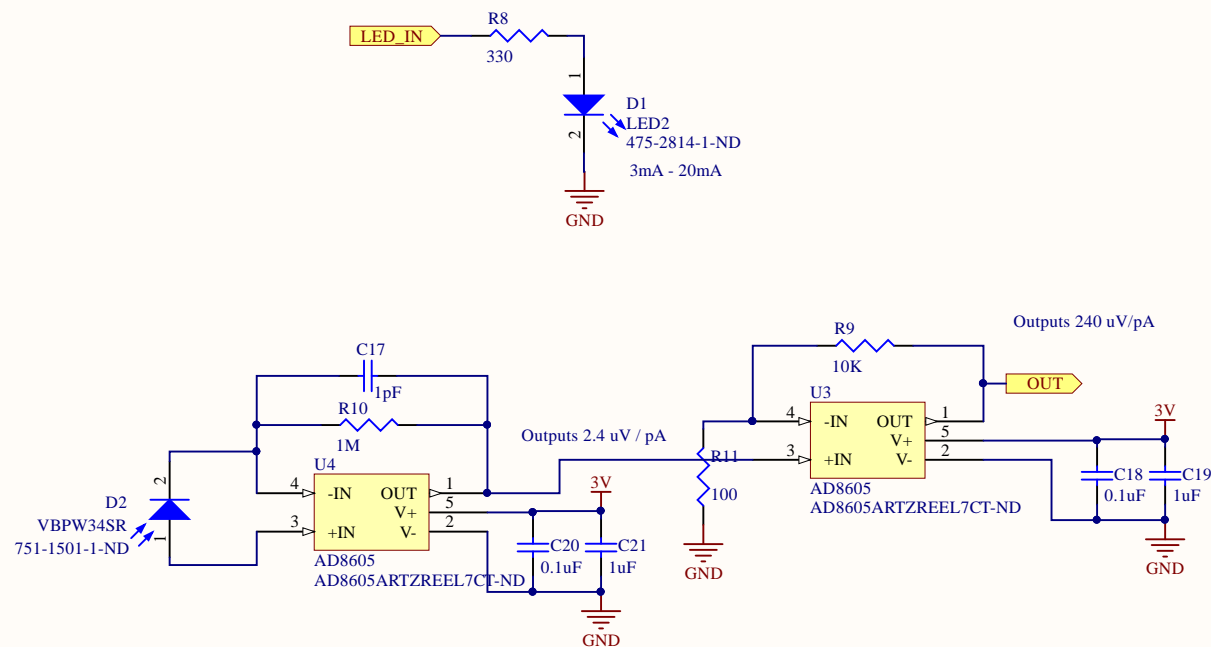

Title		
Size	Number	Revision
A4		
Date:	2018-05-20	Sheet of
File:	C:\Users\...\amplifier-chain.SchDoc	Drawn By: