








▲ Check which devices are on the "ends" of the CAN bus  
Are power lines included in this diagram?  
Is the systems PCB connected to EPS or OBC?  
Use headers or other schematic symbols?  
What are EPS\_RX and EPS\_TX for? UHF UART? Separate OBC UART  
TX/RX pairs for transceiver/computer? UART "\_A" lines?  
Use text labels and wires, or just nets? CHECK HEADER ORIENTATION  
AND PIN NUMBERS - MIGHT BE FLIPPED  
Check RST pins - are MCUs resetting each other?  
Add connector component numbers

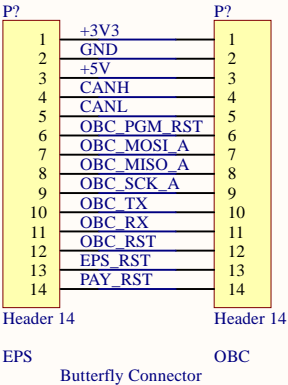

Title		
Size	Number	Revision
A4		
Date:	2018-09-11	Sheet of
File:	C:\Users\...\eps_obc.SchDoc	Drawn By:


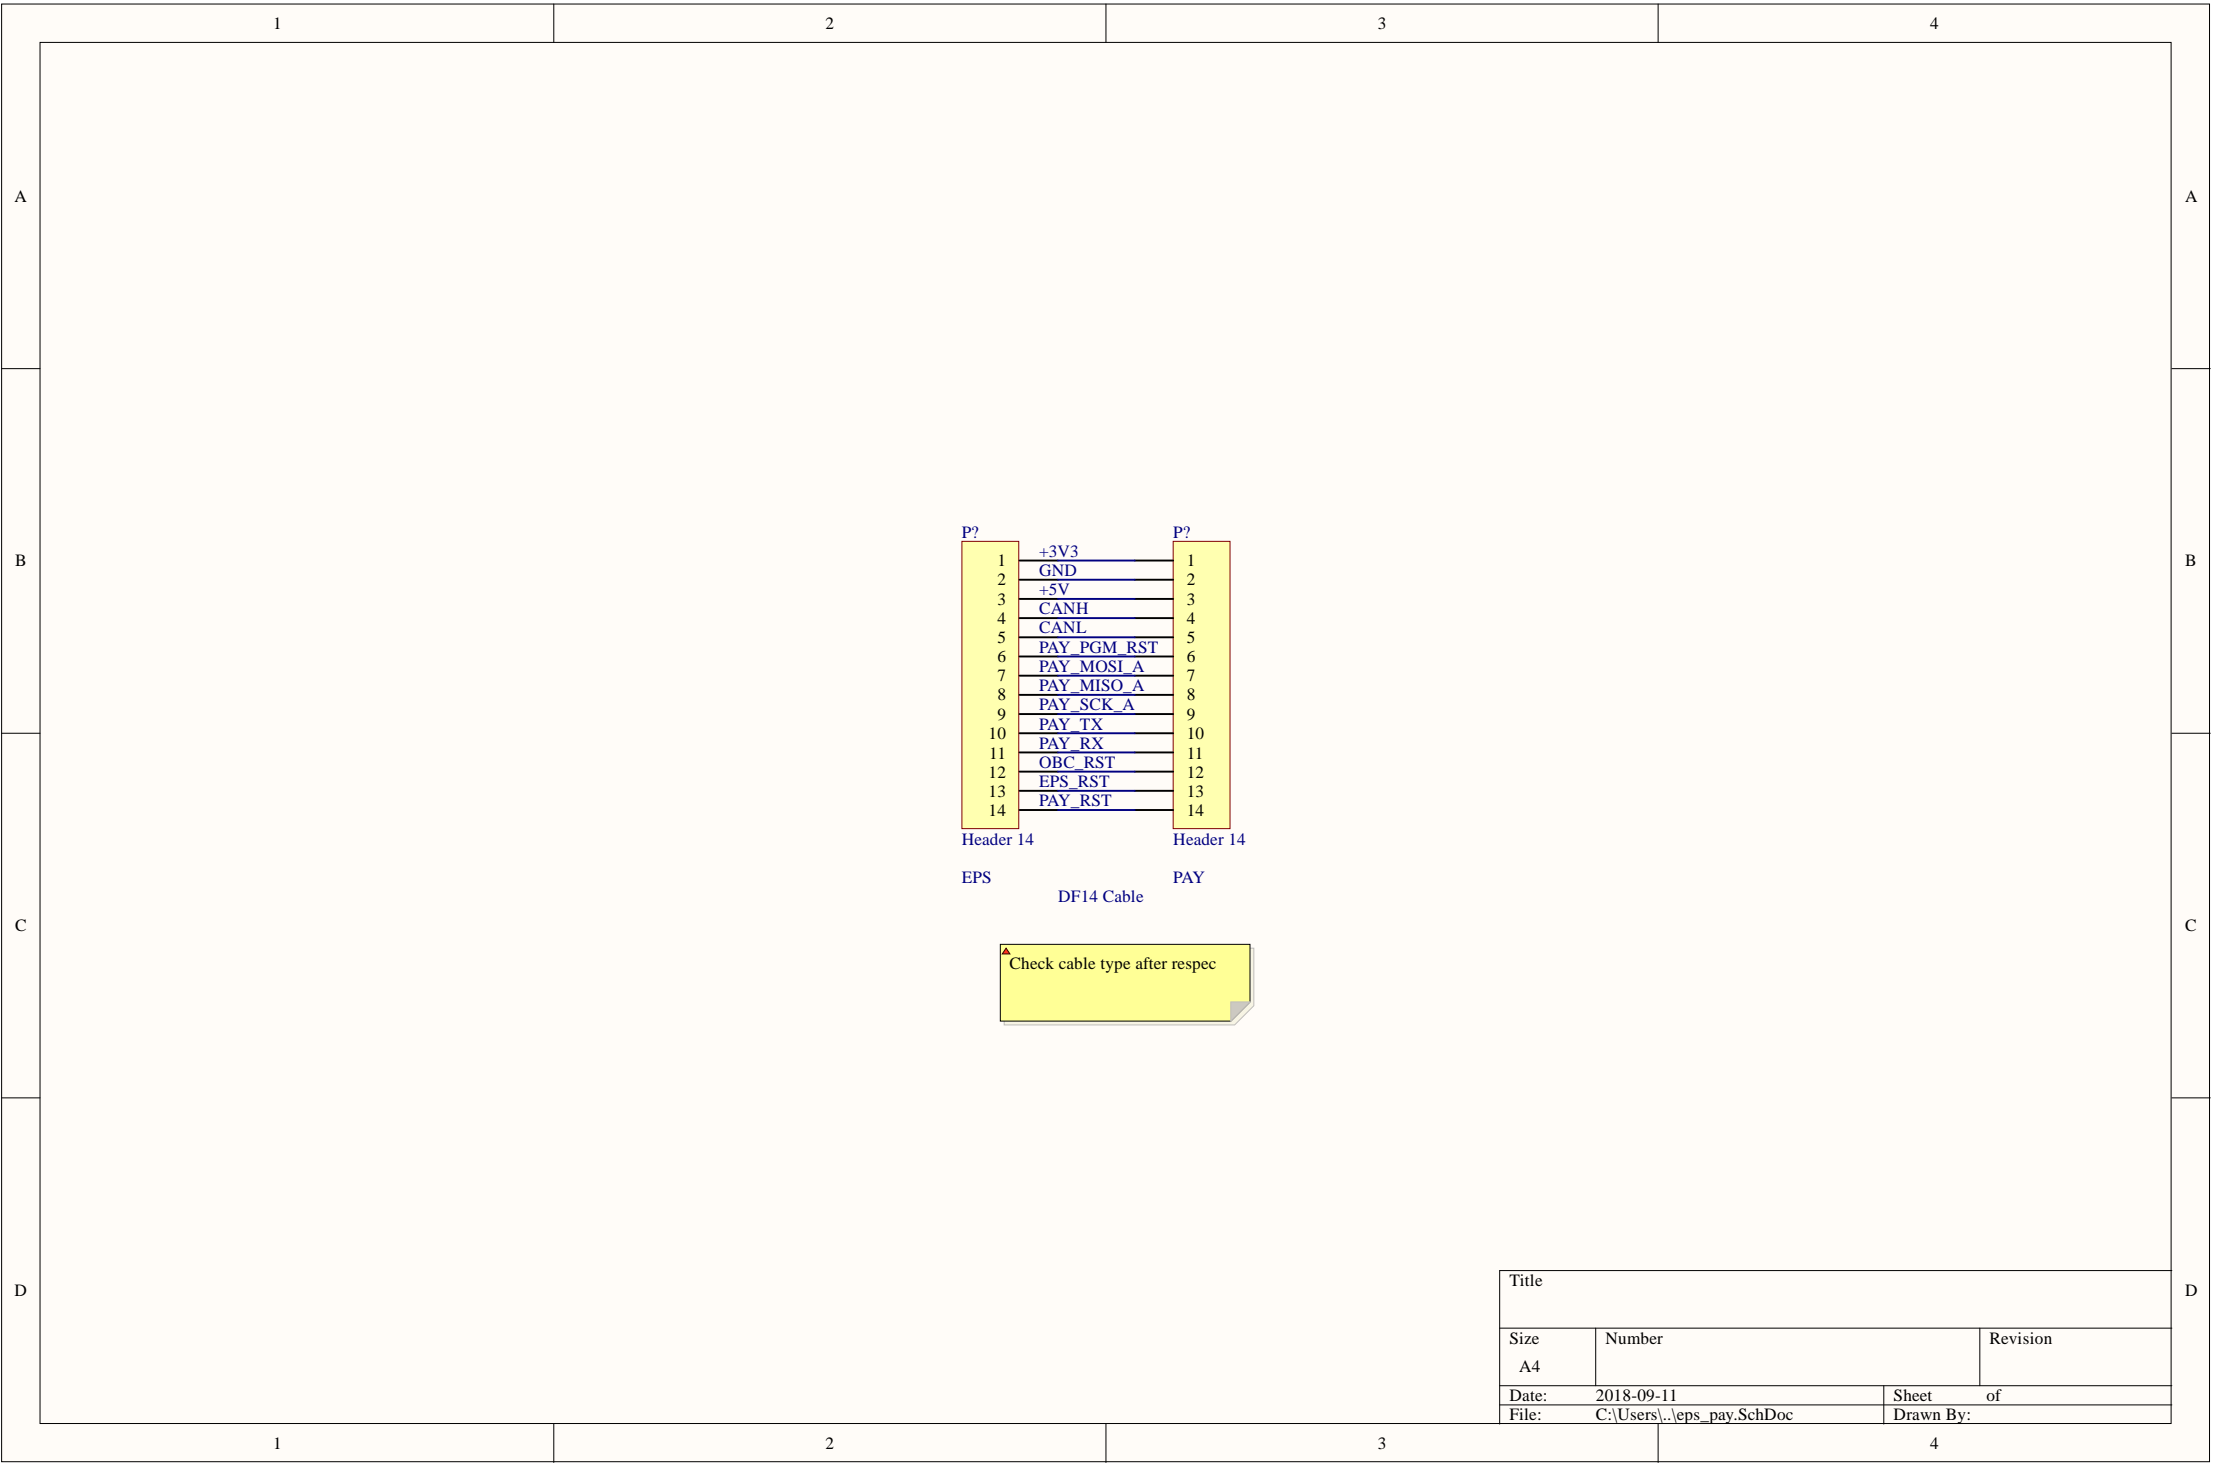


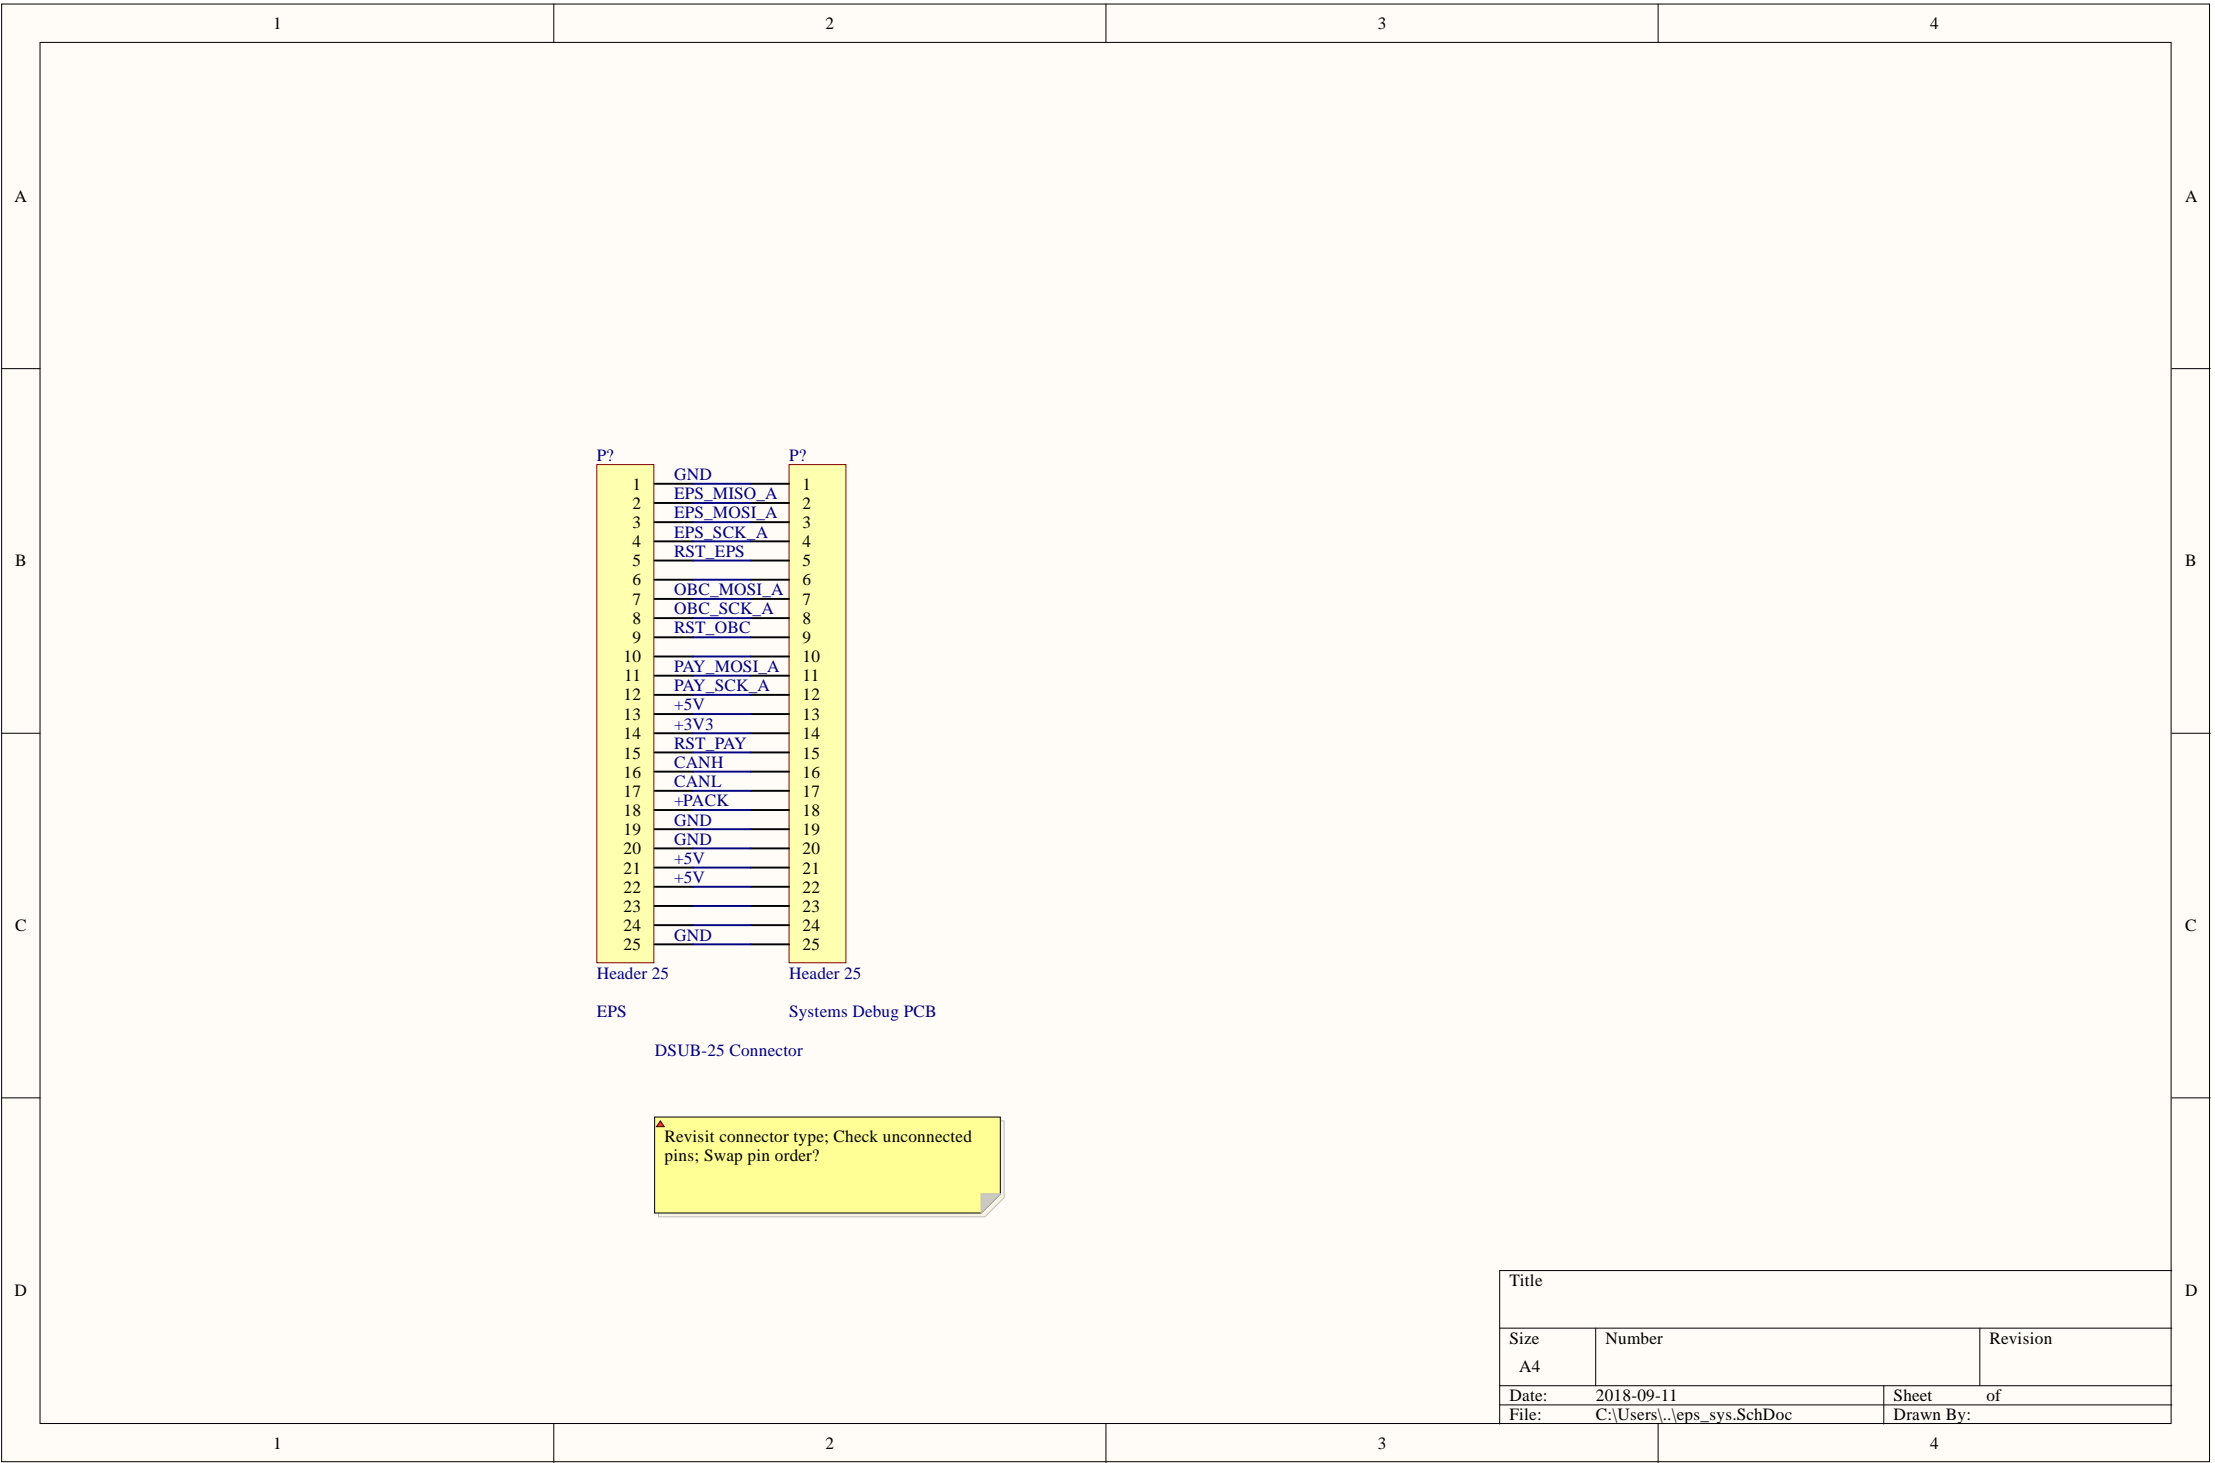

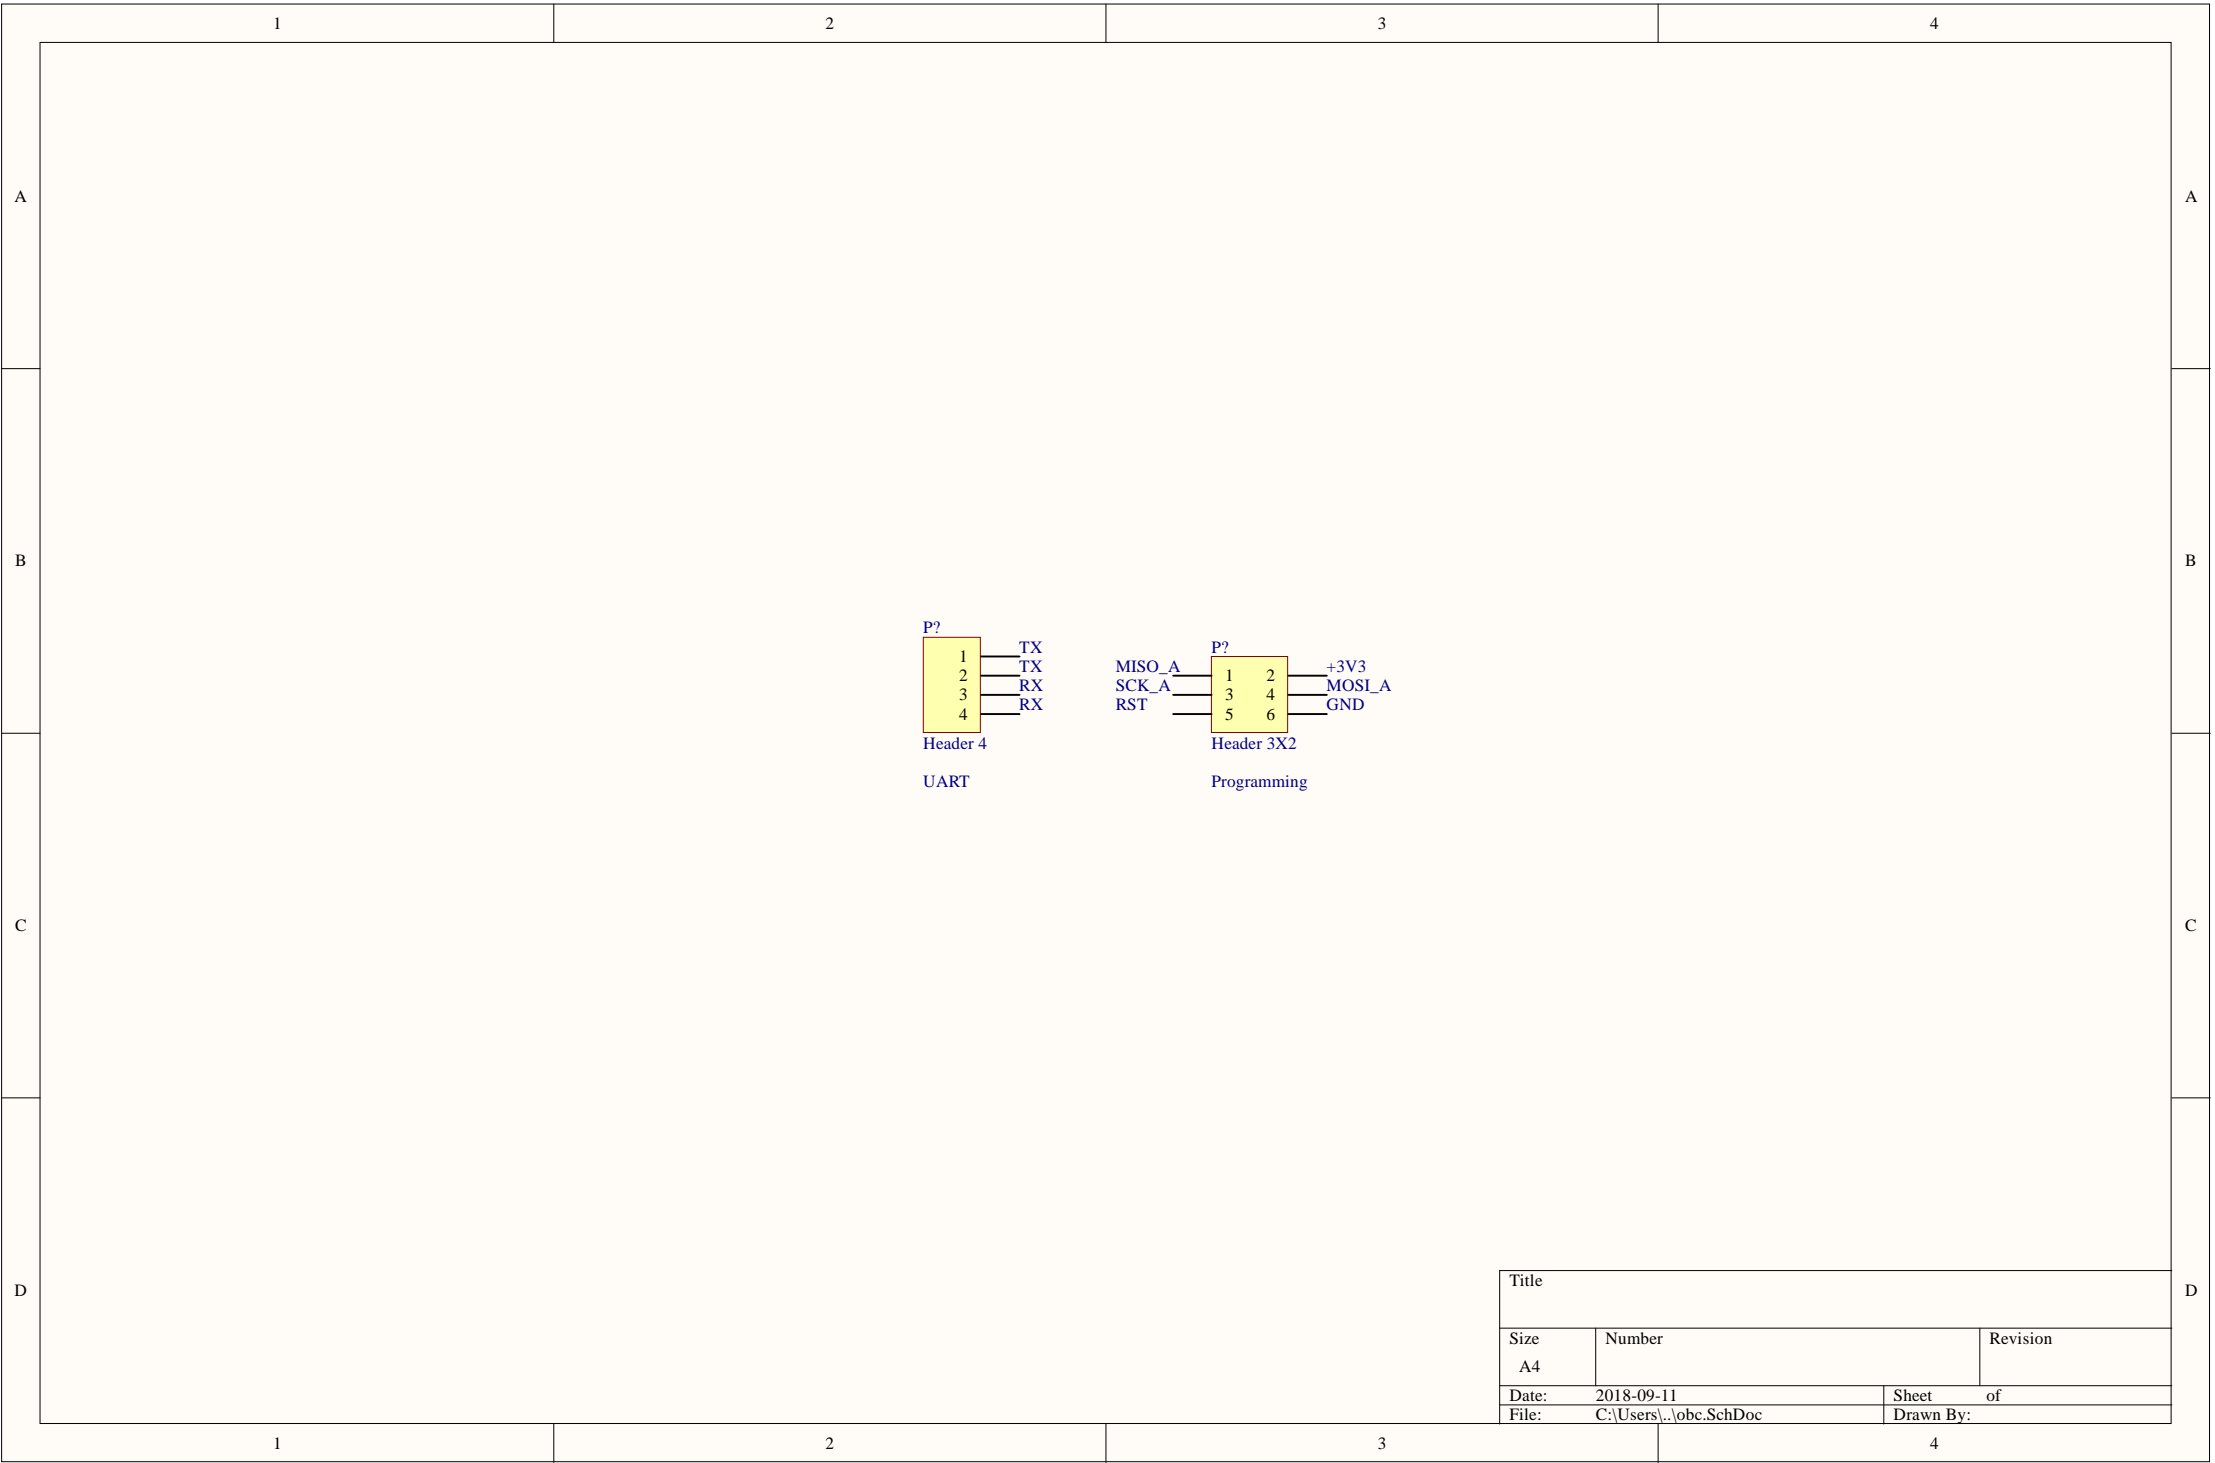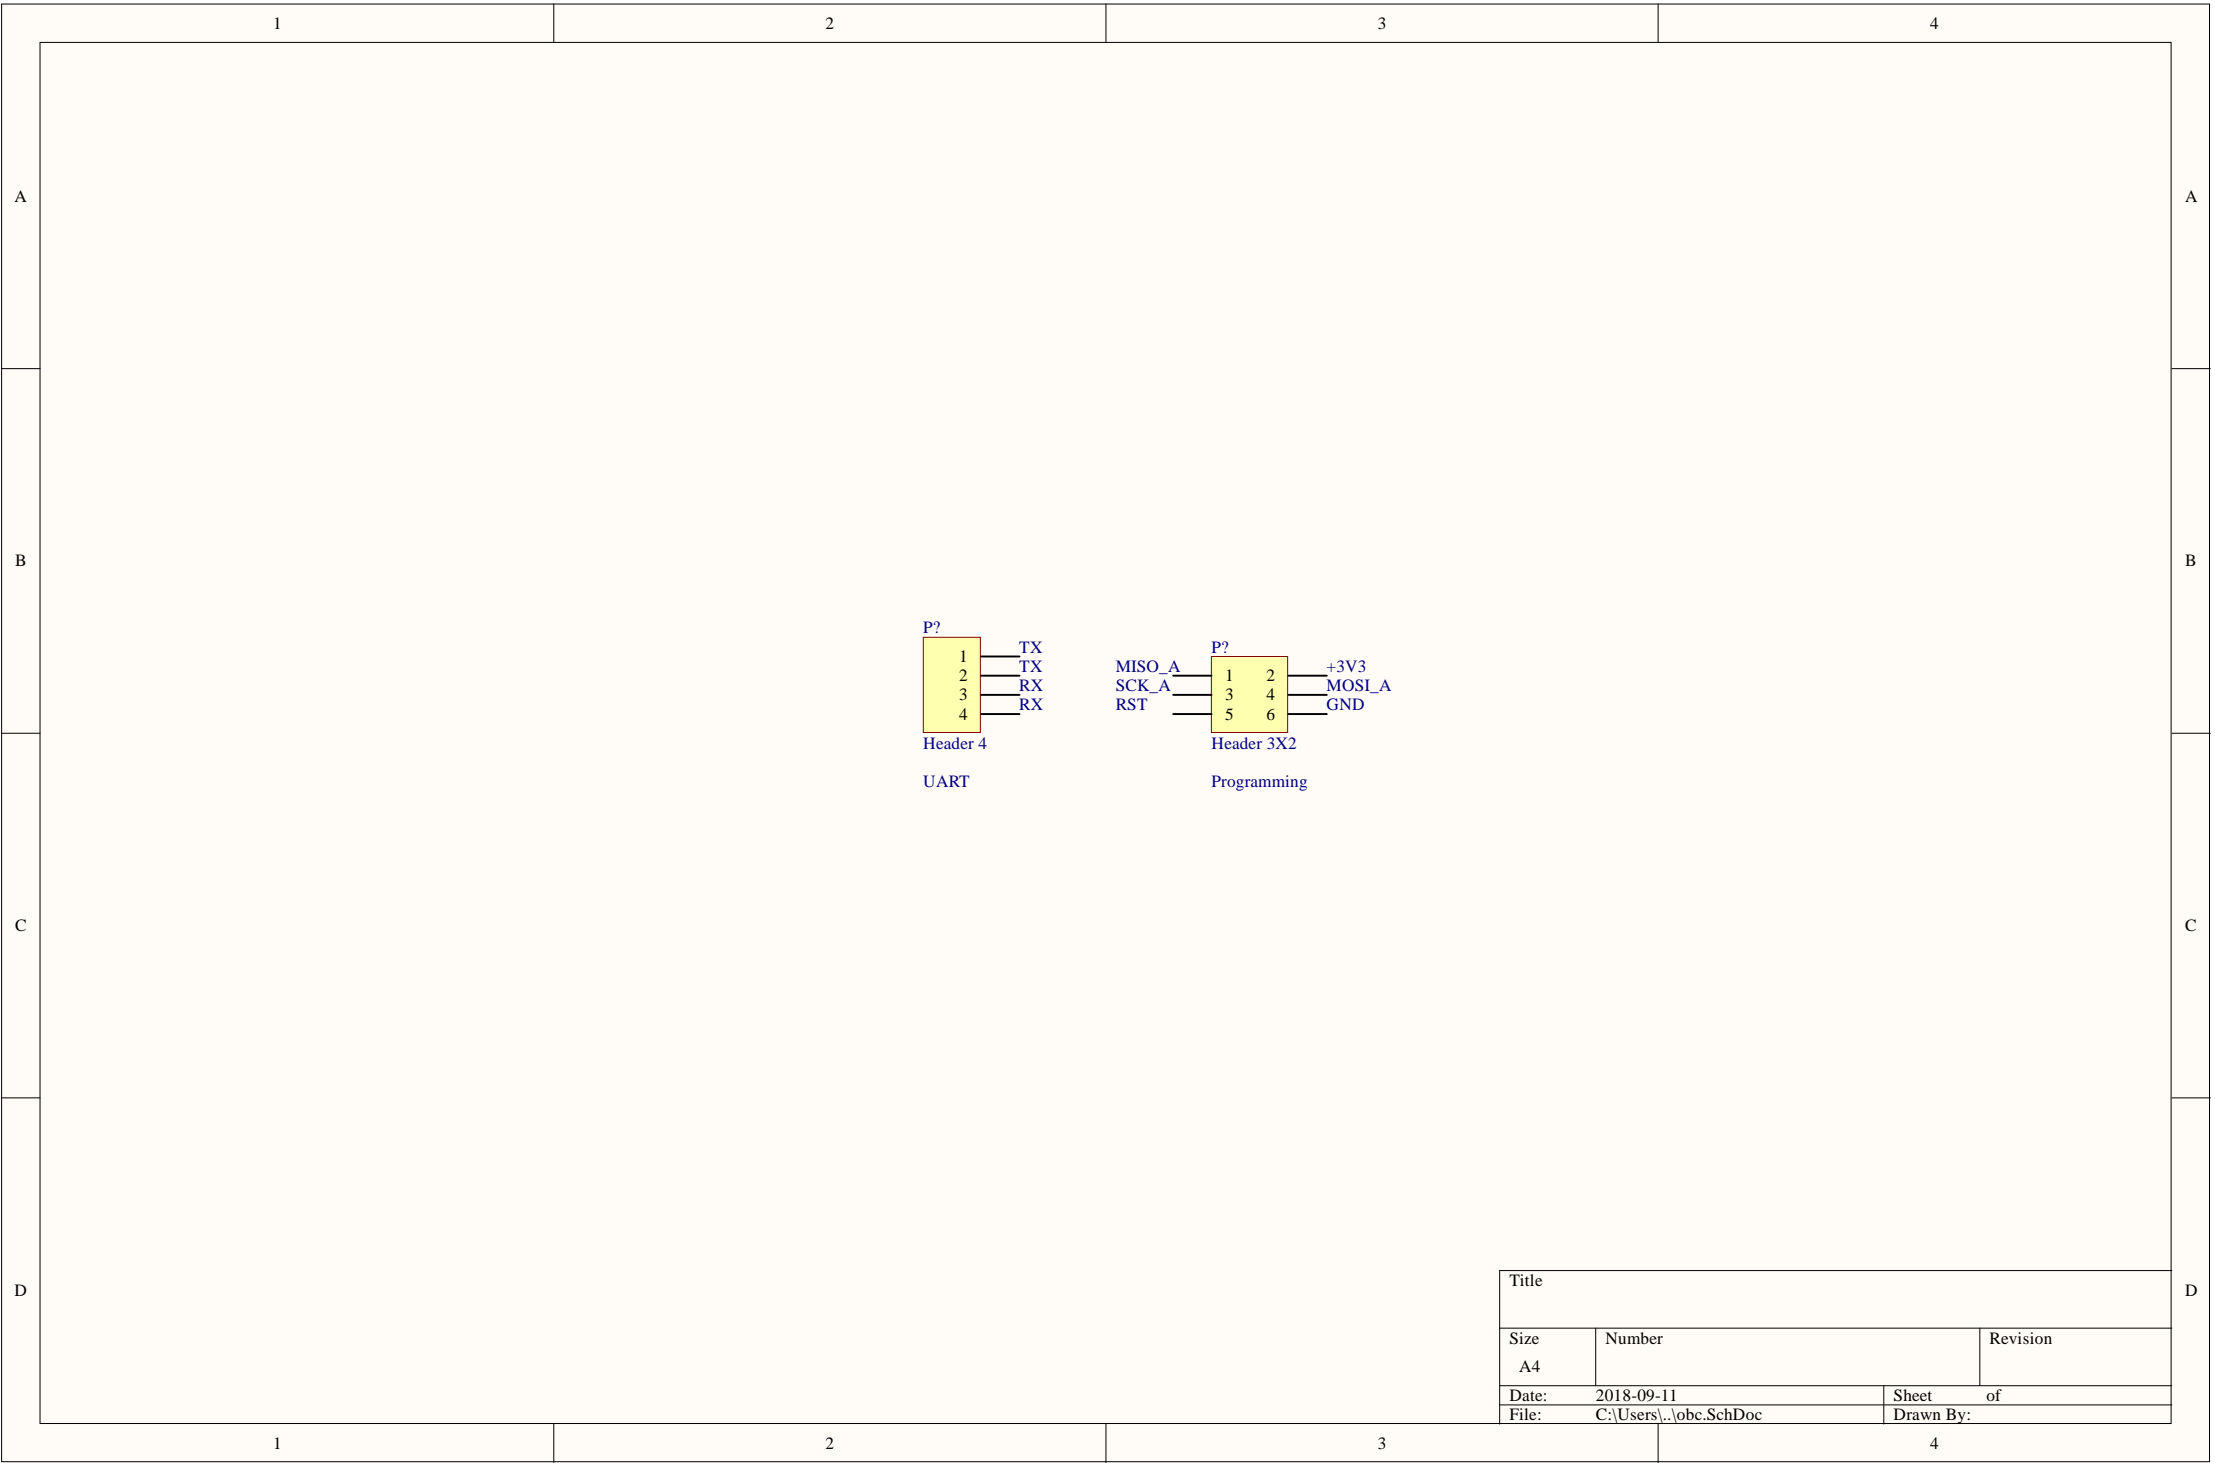



▲ Revisit connector types



Title		
Size	Number	Revision
A4		
Date:	2018-09-11	Sheet of
File:	C:\Users\...\pay_ssm_optical_led.SchDoc	Drawn By: