




PROGRAMMING & MODE SELECT

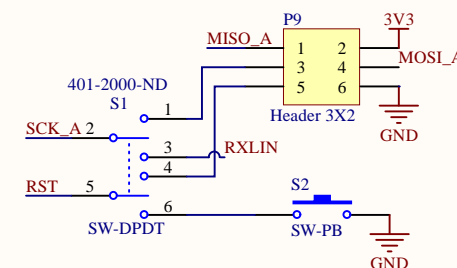

UART HEADER & MONITORING

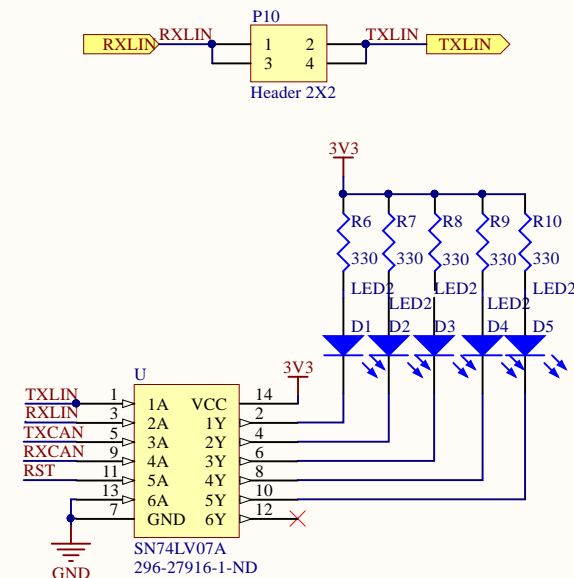


Title		
Size	Number	Revision
A4		
Date:	2018-05-21	Sheet of
File:	C:\Users\...\ATmega32M1.SchDoc	Drawn By:

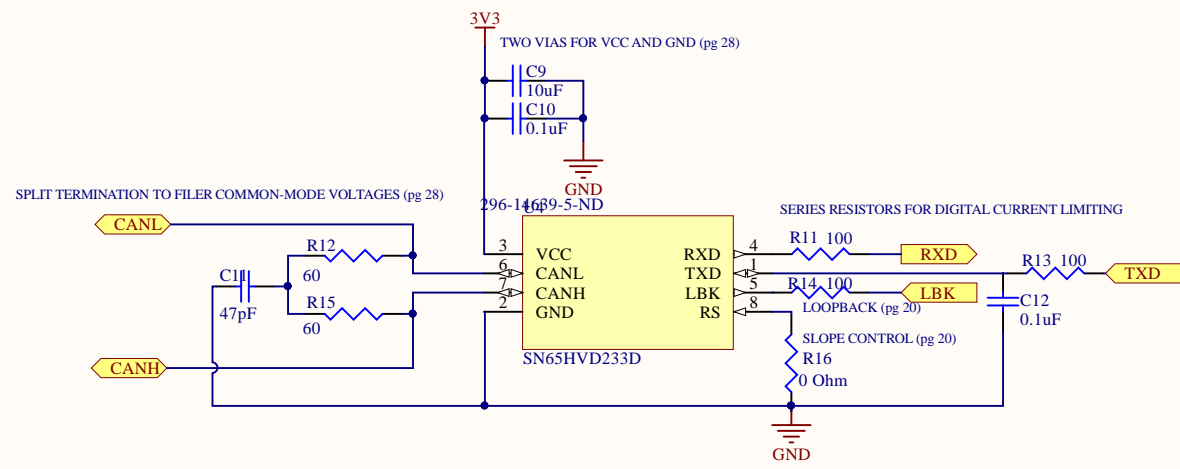


Title			
Size	Number		Revision
A4			
Date:	2018-05-21	Sheet	of
File:	C:\Users\...\can_transciever.SchDoc	Drawn By:	


- Add DAC for voltage setting

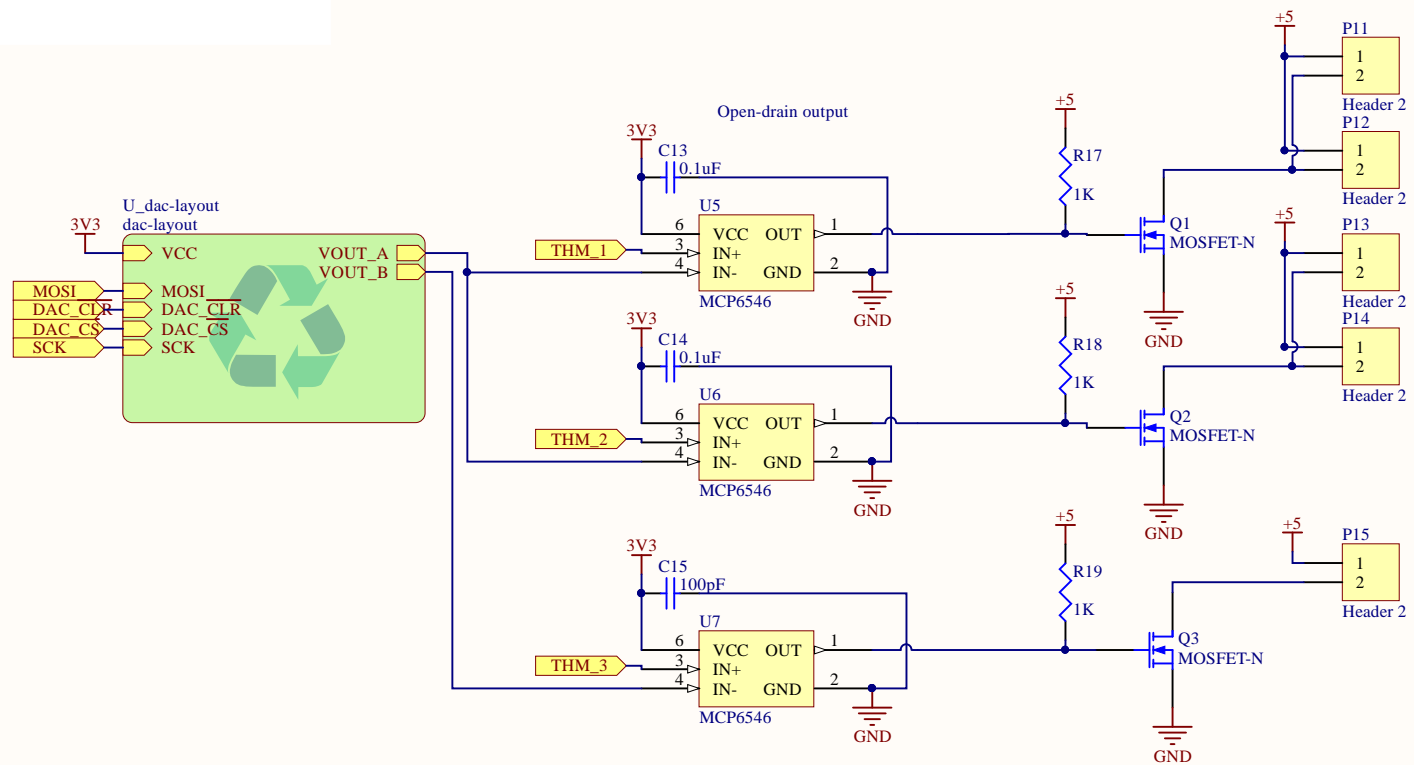

Title		
Size	Number	Revision
A4		
Date:	2018-05-21	Sheet of
File:	C:\Users\...\heater_control.SchDoc	Drawn By:

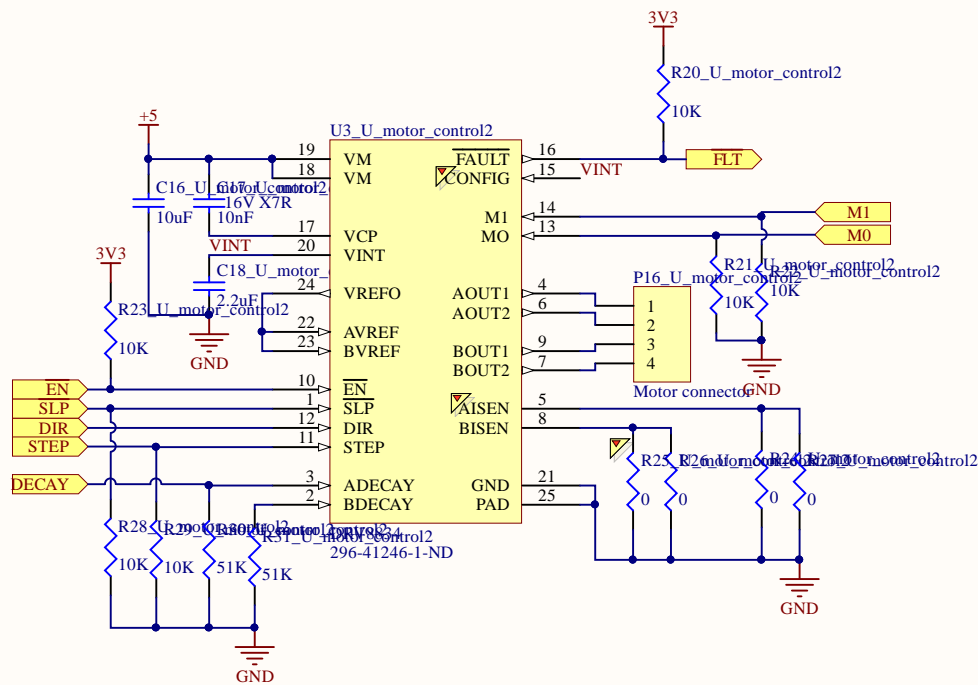


Title		
Size A4	Number	Revision
Date: 2018-05-21	Sheet of	
File: C:\Users\...\motor_control.SchDoc	Drawn By:	

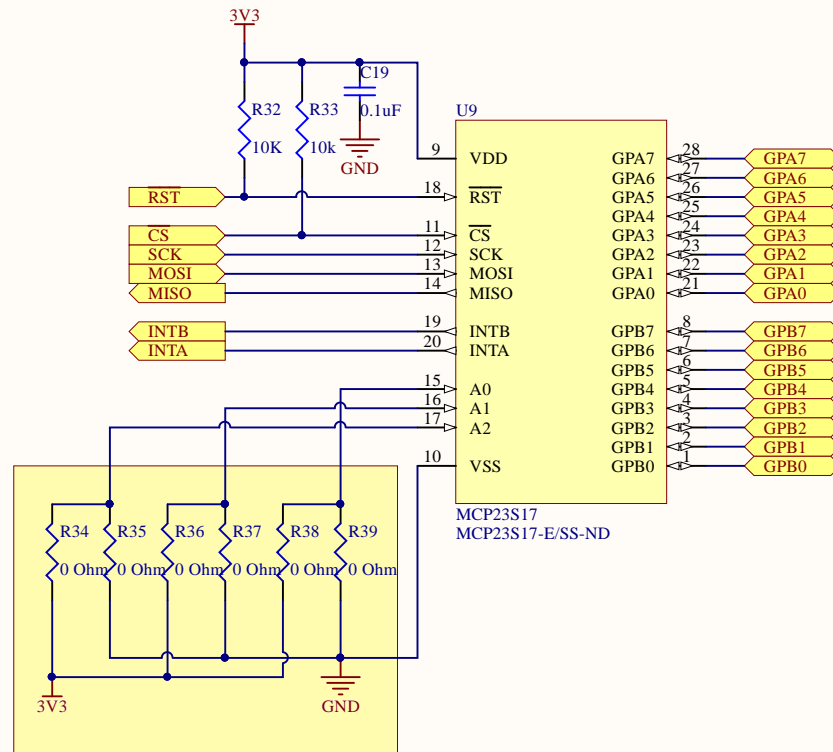


Only connect 3 to set PEX address

Title		
Size A4	Number	Revision
Date:	2018-05-21	Sheet of
File:	C:\Users\...\portExpander.SchDoc	Drawn By:



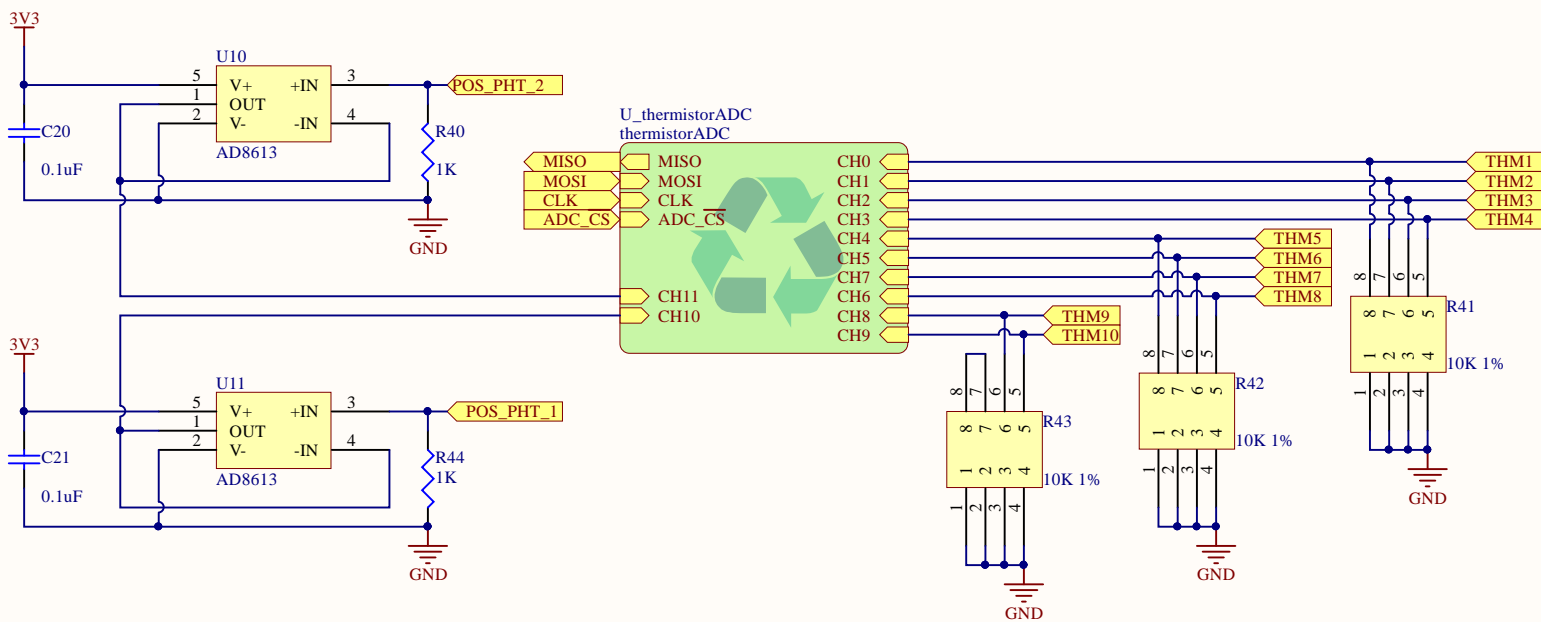


Title		
Size A4	Number	Revision
Date:	2018-05-21	Sheet of
File:	C:\Users\...\positioningAndThermistor.SchDrawn By:	

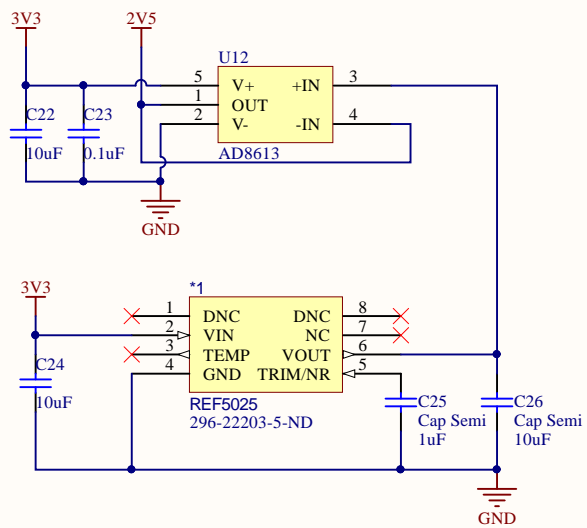


Title		
Size A4	Number	Revision
Date:	2018-05-21	Sheet of
File:	C:\Users\...\power2V5.SchDoc	Drawn By:

MISO
MOSI
SCK

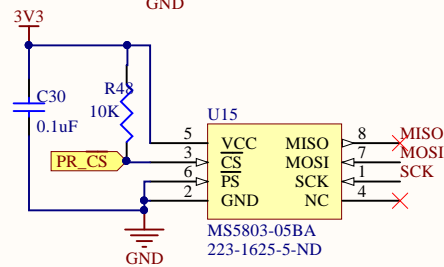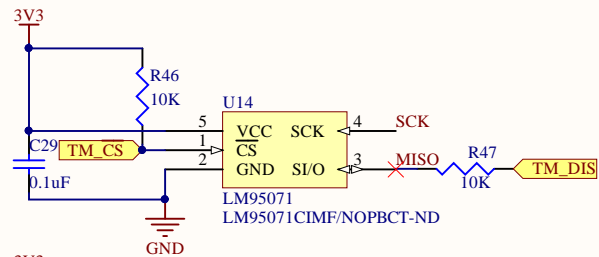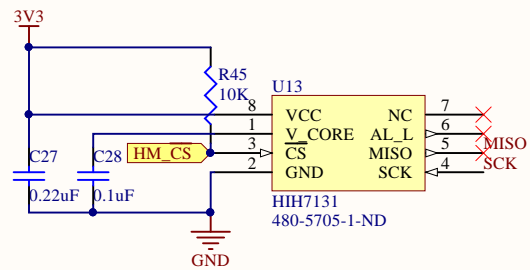

Title		
Size A4	Number	Revision
Date:	2018-05-21	Sheet of
File:	C:\Users\...\sensors.SchDoc	Drawn By:

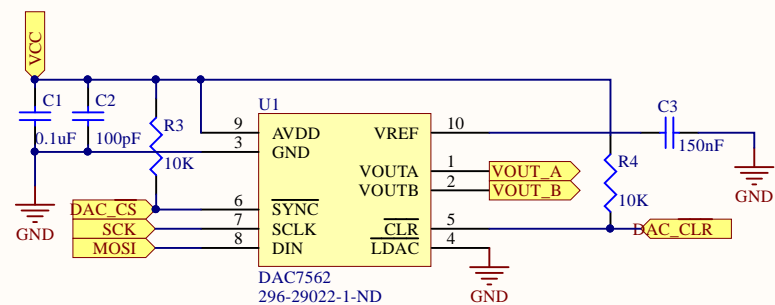

Title		
Size A4	Number	Revision
Date:	2018-05-21	Sheet of
File:	C:\Users\...\dac-layout.SchDoc	Drawn By:

