

DUNE ColdADC ASIC Preliminary Testing Results

Authors go here

January 14, 2020

DUNE Electronics Consortium

Abstract

Abstract

Contents

1	Introduction [Grace/Lin]	3
2	Test Setup	3
2.1	Cryogenic Test System (CTS) [Lin]	4
2.2	BNL Test System [Gao]	4
2.3	Fermilab Cryocooler Test System [Christian]	4
2.4	LBNL Test Board [Lin]	5
3	Functional Testing [Christian]	5
4	Performance Results	5
4.1	Noise	5
4.1.1	ColdADC Only	5
4.1.2	LArASIC + ColdADC [Gao]	5
4.2	Static Linearity (INL,DNL)	5
4.3	Dynamic Linearity (ENOB, SNDR)	5
4.4	Channel Crosstalk [Gao]	5
4.5	Power Consumption [Gao]	5
5	Issues Identified and Mitigations	5
5.1	Auto Calibration [Grace]	5
5.2	Level Shifter [Grace]	7
5.3	ADC Core Linearity [Prakash]	8
5.4	SHA/MUX Linearity [Prakash]	8
5.5	SDC Linearity [Dabrowski]	8
5.6	IR Drop * [Christian/Miryala]	8
5.7	SHA/MUX Crosstalk [Grace/Prakash/Lin]	8
5.8	BGR Op-amp [Dabrowski]	8
5.9	Overflow Wraparound [Grace]	8
6	Production Testing [Furic/Gao]	10
6.1	Test Setup	10
6.2	Results	10
7	Summary	10

1 Introduction [Grace/Lin]

The DUNE ColdADC is a digitizer ASIC intended for operation in the Deep Underground Neutrino Experiment (DUNE) Far Detectors. It will operate immersed in Liquid Argon (LAr) and will need to operate reliably, without any servicing or component replacement, for over 30 years at a temperature of approximately 88 K.

The ColdADC was implemented in 65 nm CMOS by a team comprised of engineers from Fermilab (FNAL), Brookhaven National Laboratory (BNL), and Lawrence Berkeley National Laboratory (LBNL). The prototype was submitted for fabrication in late 2018 and received in early 2019. Evaluation is ongoing.

The first prototype meets essential requirements. The key performance specification, noise, is as expected. The prototype is currently being integrated into a new revision of the DUNE Far Detector Front-End Mother Board (FEMB). Preliminary results are good, and the DUNE Far Detector FEMB is displaying better noise performance than the SBND FEMB, which uses a Commercial Off-the-Shelf (COTS) ADC. This enables the use of a lower gain setting in LArASIC. The key specifications of the ColdADC compared to the measured results are presented in Table 1.

Specification	Value	Result	Note
Operation Temperature	RT and 88 K	Success	
Sampling Rate	2 MHz	2 MHz	
Noise	200 μ V-rms	189 μ V-rms	@ LN ₂ temp
Differential Non-linearity (DNL)	± 0.5 LSB (at 12-bit level)	+0.2 to -0.5 LSB	@LN ₂ ; typical values
Integral Non-Linearity (INL)	± 1 LSB (at 12-bit level)	+1.2 to -1.1 LSB	@LN ₂ , typical values
Effective-Number-of-Bits (ENOB)	11.0 bits	<mean>=10.6 bits rms=0.3 bits	@ LN ₂
No Missing Codes Across Dynamic Range	N/A	Success	@LN ₂ and RT
Crosstalk	No Specification	< 1%	
Power Consumption	<50 mW/channel(??)	24 mW/channel	

Table 1: Summary of Results

To ensure the ColdADC can operate long-term at 88 K, the ASIC was designed using high-reliability principles developed by BNL. Studies conducted by BNL determined that hot electron effects can cause substrate damage in CMOS circuits and these effects are exacerbated by operation at cold temperature. In order to mitigate hot electrons by reducing the magnitude of the electric field at the gate-drain interface, the circuits on the ColdADC prototype are designed with a minimum length of 50% larger than the minimum length allowed by the process, and the power supplies are kept at 10% below their nominal values. Both the analog and digital circuits, the synthesized digital circuits included in the ColdADC use a custom standard cell library with larger transistor lengths than nominal. In addition, the architecture of the ADC was chosen as the Pipelined ADC, whose performance depends primarily on the matching of ratioed capacitors. Studies conducted by BNL showed capacitor performance degraded less than active devices under cold conditions.

2 Test Setup

The first prototype of the ColdADC ASIC has been undergoing evaluation at BNL, Fermilab and LBNL since early 2019. In addition to validating the portion of the ASIC that they designed, the three labs also worked collaboratively to cross-check the key performance results and debug issues. In this section, we will describe the setup used for testing the ColdADC.

2.1 Cryogenic Test System (CTS) [Lin]

2.2 BNL Test System [Gao]

Describe BNL test setup including the test boards.

2.3 Fermilab Cryocooler Test System [Christian]



Figure 1: Fermilab Cryocooler Test System.

The Fermilab Cryocooler Test System consists of a vacuum vessel and a cryogenic refrigerator. The cryogenic refrigerator is a Cryomech PT-60. It is a closed-loop cryocooler consisting of a helium compressor (located next to the vacuum vessel) and a cold head (located on top of the vacuum vessel). The cryocooler cools a copper cold-plate inside the vacuum vessel to a minimum of 60°K. A 100 ohm platinum RTD and a 75 Watt heater are mounted on the cold-plate. A temperature controller cycles the heater on and off to achieve the set-point temperature. Any temperature between 60 and 250°K can be set. The vacuum vessel has 2 large penetrations and 12 small penetrations that can be used in device testing. Typically, one of the large penetrations is used as an inspection port and the other as a feedthrough for ribbon cables. The small ports allow for a variety of other signal feedthroughs.

Two printed circuit boards are used in ASIC testing, a “cold board,” which is screwed onto the cold-plate and includes a large unmasked copper thermal contact area, and a “warm board” which is mounted as a mezzanine board on the cold-board. RTDs are placed on both the cold board and the warm board. The temperature on the warm board is typically 100°K higher than the temperature on the cold board. If the cryocooler is regulated to hold the cold-board at LN₂ temperature, then the temperature on the warm board is $\sim -96^{\circ}\text{C}$, which is warm enough for most COTS components to operate properly.

The cold board used in tests of COLDADC includes a single bare chip, wire bonded to the printed circuit board. An 80-pin header carries digital I/O and three of the four bias voltages (VDDIO and

both digital voltages) between the cold board and the warm board. A 60 pin header carries the analog bias voltage and all analog signals with the exception of the analog inputs to the COLDADC. Jumpers allow the analog inputs to be grounded or connected to an external sources using cables. The only other parts on the cold board are bypass capacitors (selected for cryogenic use) and test points.

The warm board includes connectors that mate to the cold board connectors, a 52-pin header used for a cable connection to an National Instruments (NI) FPGA module, single ended to differential converters used for the 64 and 2 MHz clock signals, differential to single ended converters for the LVDS output signals, level shifters for the CMOS I/O signals, passive components, buffer amplifiers, and SMA connectors for the analog outputs, SMA connectors for the ADC test inputs, and 9-pin D connectors for cable connections to NI power supplies that provide source-measure functionality (used for chip power and for providing or measuring analog I/O signals such as reference voltages).

Test software was written using National Instruments LabView and run on a single-crate PXIe system consisting of a controller, an NI 6583 FPGA unit, and 5 power supply modules. A Keysight 33500B waveform generator was used to provide input signals. Analog measurements were made using an oscilloscope and a DVM as well as with the NI modules.

2.4 LBNL Test Board [Lin]

3 Functional Testing [Christian]

COLDADC is highly programmable. Many circuit blocks can be bypassed and two versions of a number of circuit blocks are included to mitigate the risk that one might fail. Testing at Fermilab concentrated on verifying the functionality of all of the circuit blocks. Three design errors were revealed and a number of documentation errors were corrected. The table below summarizes the tests.

4 Performance Results

Note to authors: discuss in this section the high level performance results. The main message here is to convey to the readers that the ASIC functions well overall. The details of the known issues will be discussed in the next section.

4.1 Noise

4.1.1 ColdADC Only

4.1.2 LArASIC + ColdADC [Gao]

4.2 Static Linearity (INL,DNL)

4.3 Dynamic Linearity (ENOB, SNDR)

4.4 Channel Crosstalk [Gao]

4.5 Power Consumption [Gao]

5 Issues Identified and Mitigations

Note to authors: describe studies that have been done to identify the issues and possible mitigations.

5.1 Auto Calibration [Grace]

The linearity of the ADC is primarily determined by the capacitor matching internal to the circuit, and to a lesser extent the performance of the internal amplifiers. To achieve the target specifications, the ADC requires calibration. The calibration in ColdADC can be carried out internal, in a fully automated way, or can be done externally. Unfortunately, while the chip could be fully calibrated externally, with calibration data loaded back onto the chip, the autocal function failed in the prototype. The ADC

Test/Circuit	Result
Power on	No shorts
I2C	Works as designed (registers can be written and read)
Reset	Works as designed (registers are set to default values)
UART	Works as designed
LVDS I/O	Works as designed (output amplitude controlled as designed)
Clock Generation	16 MHz clock verified
Data Formatter	Works as designed
Band Gap Reference	Works ~as designed at room temperature, but fails when cold.
	Problem traced to a design error (inclusion of the wrong OP Amp in the current source DAC); works as designed
	with elevated VDDA2P5 (needs 2.7V at 77K)
CMOS Reference	Works as designed
Automatic Calibration	Fails. Calibration can be done by using control registers to force the sequence of steps required
	and doing arithmetic off-chip.
	Eventually we noticed that when automatic calibration is attempted, the low order bytes of W0 and W2 for every
	“calibrated” stage are equal. Simulation verified that
	this is due to a timing error storing W0 and W2.
ADC Correction Logic	Works as designed (loaded fake comparator output values; resulting ADC output is as expected).
Pipeline ADC	Linear ramp yields close to linear output;
	deviation from linear at extremes of ramp;
	no significant deviation from linear when cold.
Input buffers	Significant non-linearity observed.
	Problem traced to circuit naming confusion that resulted
	in level shifters being omitted from input buffers.
	Buffers operate ~as designed with elevated VDDD1P2
Sample and Hold and MUX	Require elevated VDDD1P2 because
	inputs come through input buffers.

Table 2: Functional Testing.

performance under autocal or external calibration does not differ in any way, so the main issue here is the loss of convenience that autocal promises.

The cause of the auto calibration issue is understood and is mainly due to a miscommunication between ASIC designers. When we developed the digital part of the ColdADC, we decided to partition the blocks such that the blocks calibrate the ADC and compute the corrected digital output would be placed within the ADC cores, and the rest of the digital logic would be aggregated in a third core. This can be seen in Figure 2. The CAL_UNIT is the block that performs the calibration and also applies the calibration coefficients (or weights) to the data during normal operation. Each CAL_UNIT stores the calculated configuration weights to the register file in the CAL_CORE (which was synthesized separately).

This would have been an acceptable strategy but due to miscommunication the interface between the cores was not simulated with back-annotated timing. This means that the timing when a computed calibration coefficient is written back into the registers was not simulated properly. When the blocks were placed, there was a timing error between the CAL_UNIT and the CAL_CORE in the case when the CAL_UNIT was writing back computed calibration weights into storage in the CAL_CORE.

An example of the intended operation is shown in Figure 3. In this simulation the CAL_UNIT is back annotated with parasitics (but the interface with the CAL_CORE is not properly back annotated). In this simulation, the intended data is in the second row (the word 0x03FD) and is written to the w2_4 register that resides in the CAL_CORE correctly. Correct operation is assured by disabling the memory after the edge of clk.

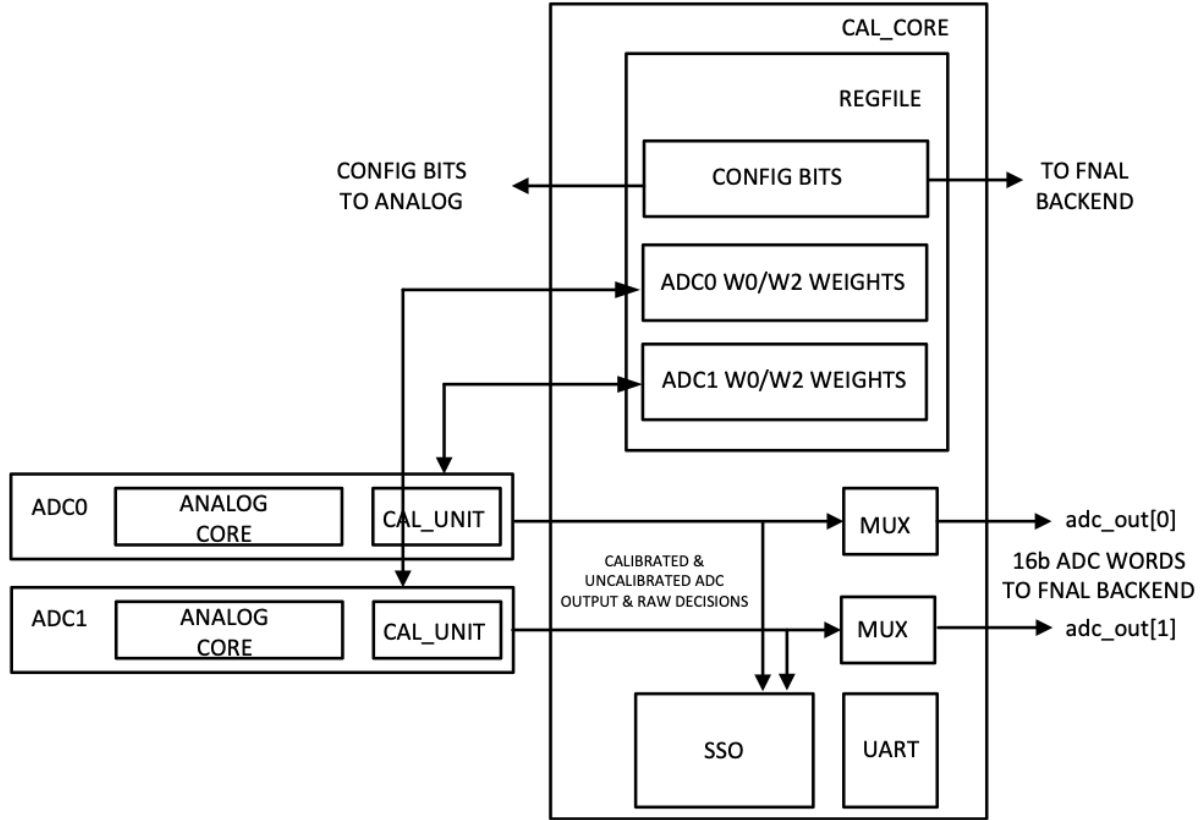


Figure 2: Partitioning of Digital Logic in the ColdADC.

When the interface between CAL_UNIT and CAL_CORE was properly annotated and simulated, the result was in Figure 4. A gross error has been made, because the write signal is released too soon and therefore we have a race condition. What happens specifically here is that due to the race condition, the LSB byte of w0[4] is overwritten with the LSB byte of w2[4]. This is error and causes the entire calibration sequence to fail.

The fix here is to repartition the digital logic for the second version of the ColdADC ASIC. We will move the digital calibration and correction logic out of the ADCs and into a single, monolithic digital block. This will ensure that the interfaces between the calculation engines and the memory are simulated correctly and the absence of race conditions will be verified using static timing analysis. The RTL code itself will also be made more robust by adjusting the internal state machine.

5.2 Level Shifter [Grace]

Because the digital core of the Cold ADC uses 1.2 V rails, but many of the analog circuits on the chip use 2.5 V rails, level shifters are required to translate control settings from the 1.2 V voltage domain to the 2.5 V voltage domain. Unfortunately, due to confusion during the design process, the required level shifters that were required for the front end single-ended-to-differential input buffer were not included. Therefore, in order to configure the block correctly, the 1.2 V digital supply must be elevated. While this allows the chip to be operated successfully, it is not compatible with long-term reliability.

The fix is to include the proper level shifters in the next version of Cold ADC. The fix has already been made in the layout.

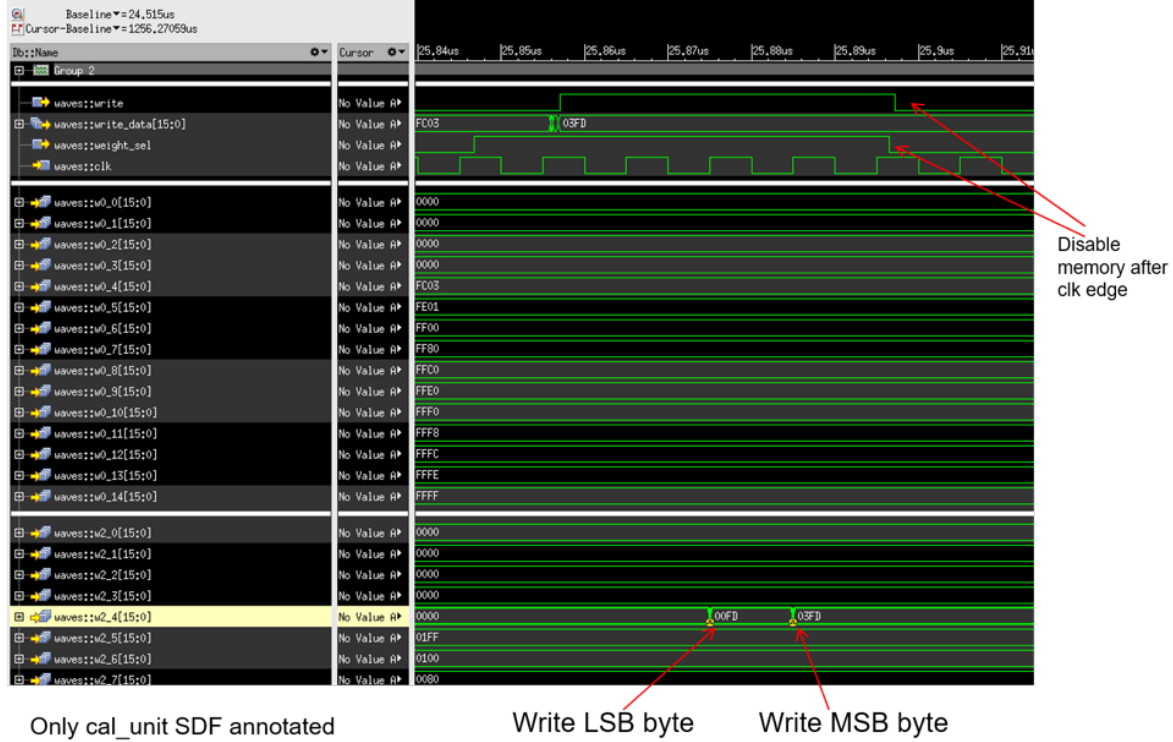


Figure 3: Correct writeback of calibration weights

5.3 ADC Core Linearity [Prakash]

5.4 SHA/MUX Linearity [Prakash]

5.5 SDC Linearity [Dabrowski]

5.6 IR Drop * [Christian/Miryala]

5.7 SHA/MUX Crosstalk [Grace/Prakash/Lin]

While there is no formal specification regarding the channel crosstalk, we have measured crosstalk of approximately 1%. We have done a variety of measurements that suggest the crosstalk is due to kickback between the channels during the sampling phase that makes it so the SHAs are not completely settled between samples. When the channels are slowed down, the crosstalk is somewhat mitigated, which indicates that it is due to insufficient bandwidth in the SHA Mux. To improve this, we will lower the impedance of the Mux to allow faster settling.

5.8 BGR Op-amp [Dabrowski]

5.9 Overflow Wraparound [Grace]

The gains of each stage are weighted by the calibration. If the sum of the weights of the stages is greater than 2^{16} , then the digital correction logic can overflow, and a large input can lead to a small output code and vice versa. The stages were designed with an analog closed-loop gain slightly less than two. Based on supplied process data, we expected the closed-loop gain would be low enough to be free from overflow. In fact this was not the case and overflow was observed when the input voltage was close to one of the reference voltages. This can be seen in Figure 5, which shows the response of the two different ADCs on one of the Cold ADC prototypes to the same input signal. The left portion of Figure 5 shows the ramp response of ADC0 and the prototype operates as expected. When the



Figure 4: Error in writeback of calibration weights

ADC is saturated, the digital output is pinned to its maximum value. On the right portion of Figure 5 overflow is observed as part of the ramp response of ADC1. In this case, the ADC input reaches its maximum value but instead of remaining pinned, the digital output jumps to a low value. This is due to higher-than-expected closed-loop gain in ADC1.

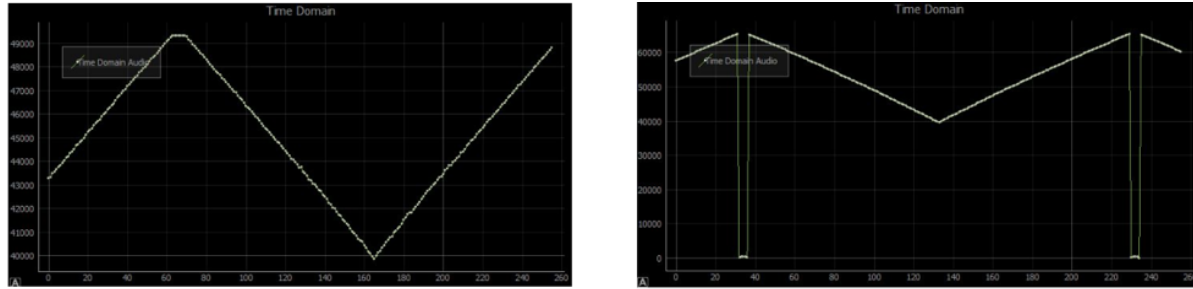


Figure 5: Digital overflow. The image on the left corresponds to ADC0 and the image on the right corresponds to ADC1.

We will fix this in two ways. First, we will further reduce the analog gain of the stages. Second, we will add to the next version of the prototype a digital overflow detection block that will sense over (or under) flow and pin the output code at a high or low level, respectively. It will do that by looking at the sign bit of the running sum one stage prior to the last. Then the algorithm will know whether to pin to a high or low value.

6 Production Testing [**Furic/Gao**]

6.1 Test Setup

6.2 Results

7 Summary

References

- [1] "LBNF/DUNE Conceptual Design Report", <https://web.fnal.gov/project/LBNF/ReviewsAndAssessments/LBNF-DUNE%20CD-1-Refresh%20Directors%20Review/SitePages/Conceptual%20Design%20Report.aspx>
- [2] First scientific application of the membrane cryostat technology, D.Montanari et al, *AIP Proceedings* 1573, 1664 (2014) <http://scitation.aip.org/content/aip/proceeding/aipcp/10.1063/1.4860907>
- [3] "The GENIE Neutrino Monte Carlo Generator", C. Andreopoulos, et al., Nucl. Instrum. Meth. A614, 87 (2010).

Appendix

Example for citing references. References [1–3] should be entered in bibliography.tex file under your section.

Example for citing references. References~\cite{dunecdr,montanari_35ton,genie}.

Here is an example of how to insert Fig. 6. Figures should be saved in ./figures directory.

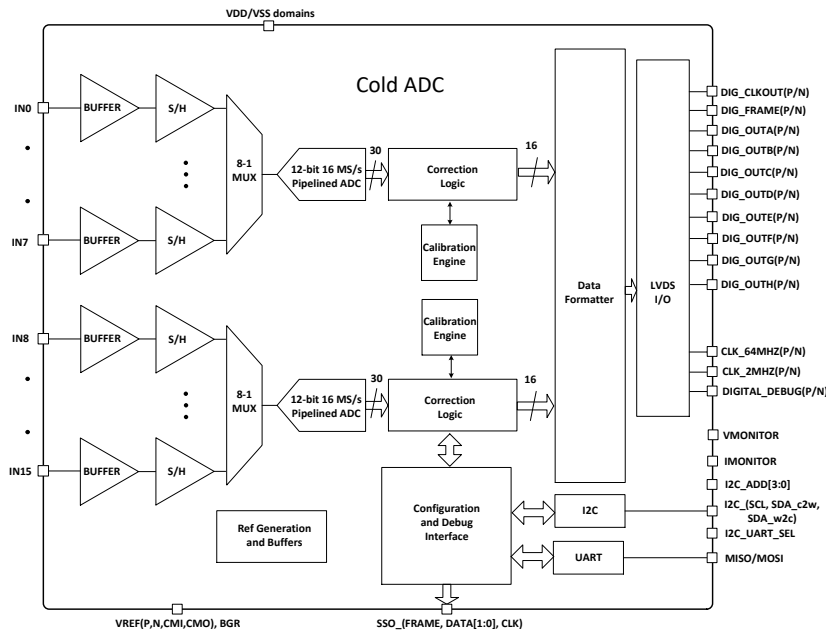


Figure 6: ColdADC Block Diagram.

```
\begin{figure}[htb]
\centering
\begin{center}
\includegraphics[width=0.7\textwidth]{figures/coldadc_blockdiagram.pdf}
\end{center}
\caption{ColdADC Block Diagram.}
\label{fig:adc_blockdiagram}
\end{figure}
```

Here is an example of how to create Table 3.

Component	dimensions [m]
APA (active)	$2.29(\textit{wide}) \times 5.9(\textit{high})$
APA (external)	$2.32(\textit{wide}) \times 6.2(\textit{high})$
TPC (active)	$7.0(\textit{long}) \times 7.2(\textit{wide}) \times 5.9(\textit{high})$
TPC (external)	$7.3(\textit{long}) \times 7.4(\textit{wide}) \times 6.2(\textit{high})$
cryostat (internal)	$8.9(\textit{long}) \times 7.8(\textit{wide}) \times 8.1(\textit{high})$

Table 3: Dimensions of DUNE-PT.

```

\begin{table}[h]
\centering
\begin{tabular}{|c|c|}
\hline
\textbf{Component } & dimensions [m] \\ \hline
APA (active) & $2.29 (wide) \times 5.9 (high)$ \\ \hline
APA (external) & $2.32 (wide) \times 6.2 (high)$ \\ \hline
TPC (active) & $7.0 (long) \times 7.2 (wide) \times 5.9 (high)$ \\ \hline
TPC (external) & $7.3 (long) \times 7.4 (wide) \times 6.2 (high)$ \\ \hline
cryostat (internal) & $8.9 (long) \times 7.8 (wide) \times 8.1 (high)$ \\ \hline
\end{tabular}
\caption{Dimensions of DUNE-PT.}
\label{tab:TPC-dim}
\end{table}

```