


Si5345时钟芯片使用说明

Si5345芯片有诸多寄存器需要配置，为简化开发流程所以厂商提供了**ClockBuilder Pro**软件帮助快速配置该芯片的各个寄存器。

1、点击[Create New Project]，创建工程

Tip


ClockBuilder-Pro-3.0.exe <https://www.alipan.com/s/JAzmrsHTetj> 提取码: p7I5 点击链接保存，或者复制本段内容，打开「阿里云盘」APP，无需下载极速在线查看，视频原画倍速播放。

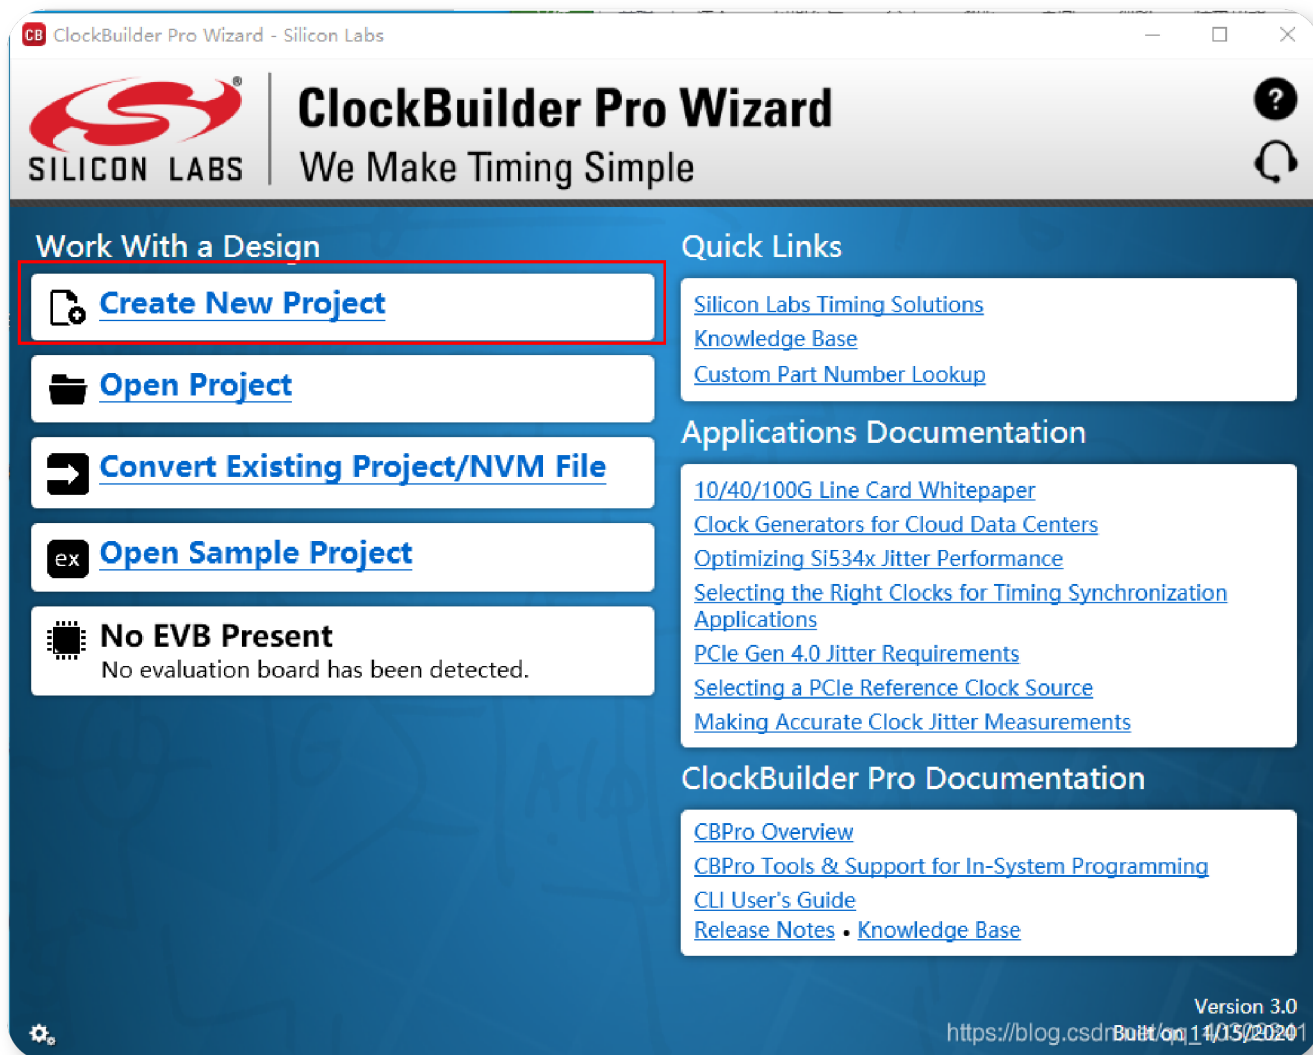


2、点击[Show All Device]




3、选择使用的芯片型号，如：Si5345

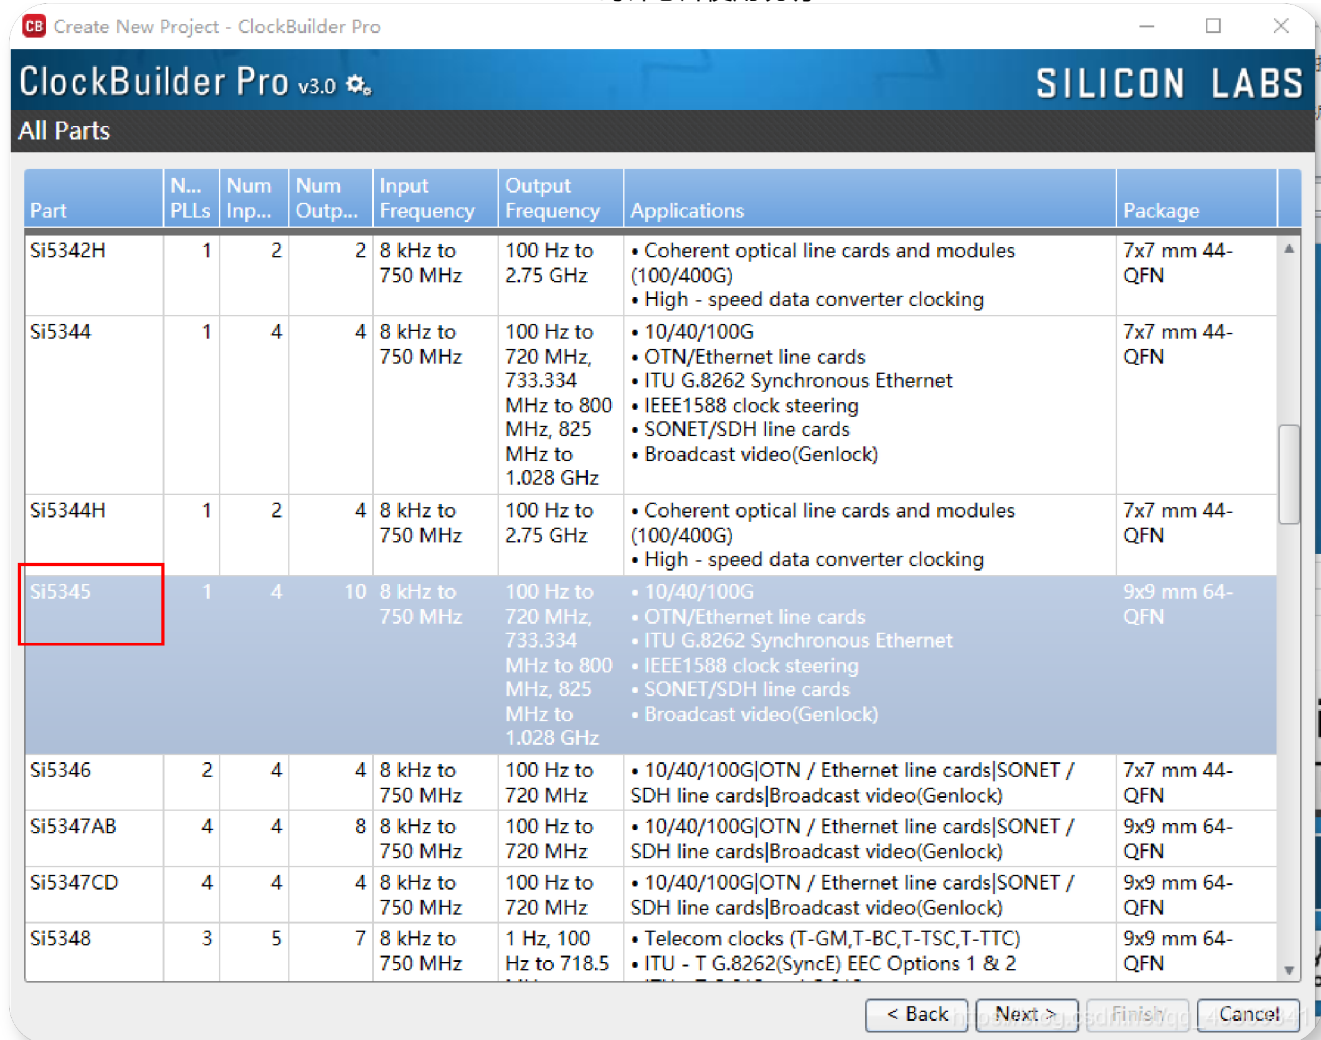


4、点击[Next]，忽略[Design ID]

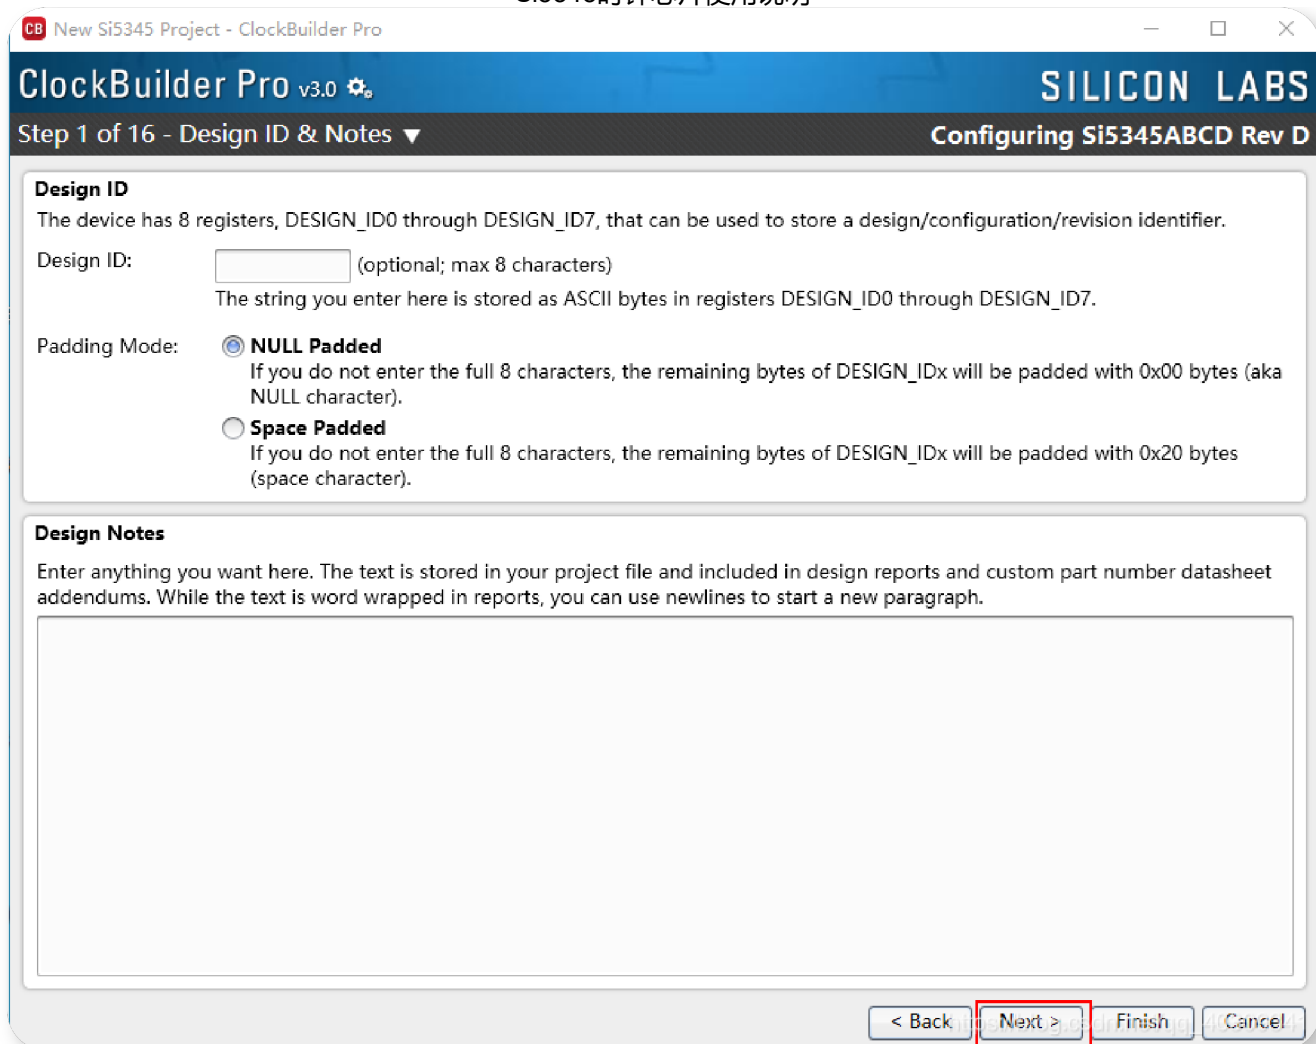


5、选择芯片对应的[Device Revision]

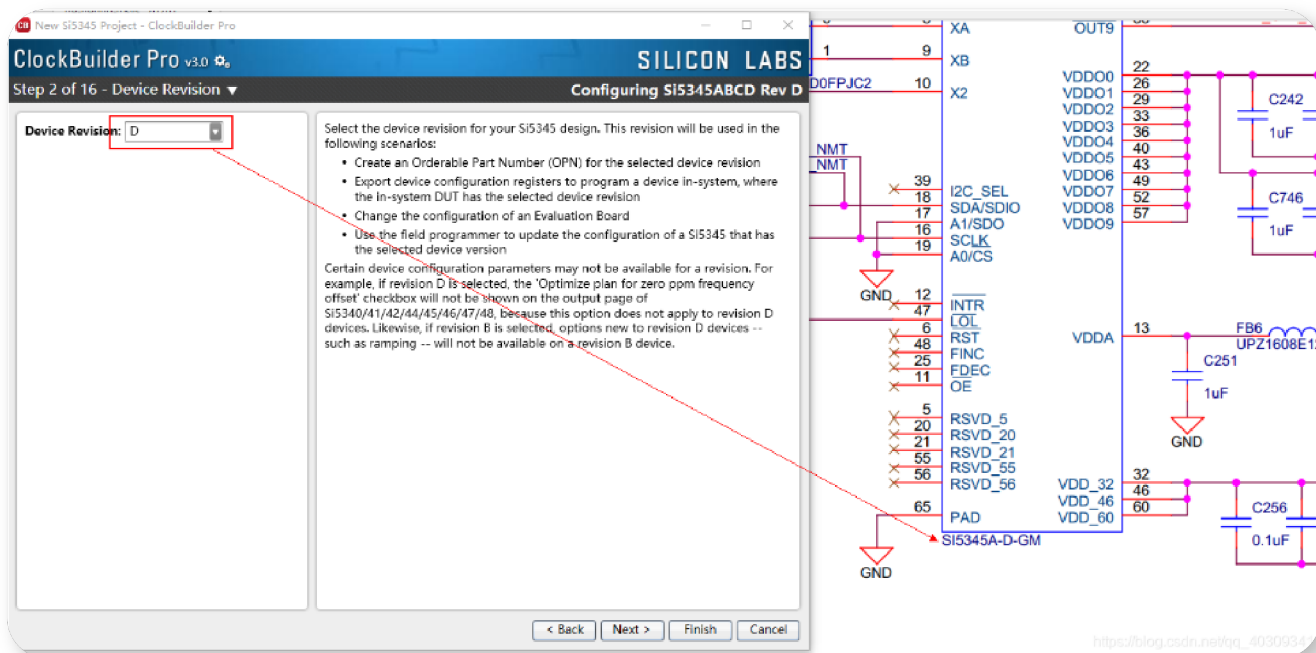


6、选择实际应用的晶振大小和类型

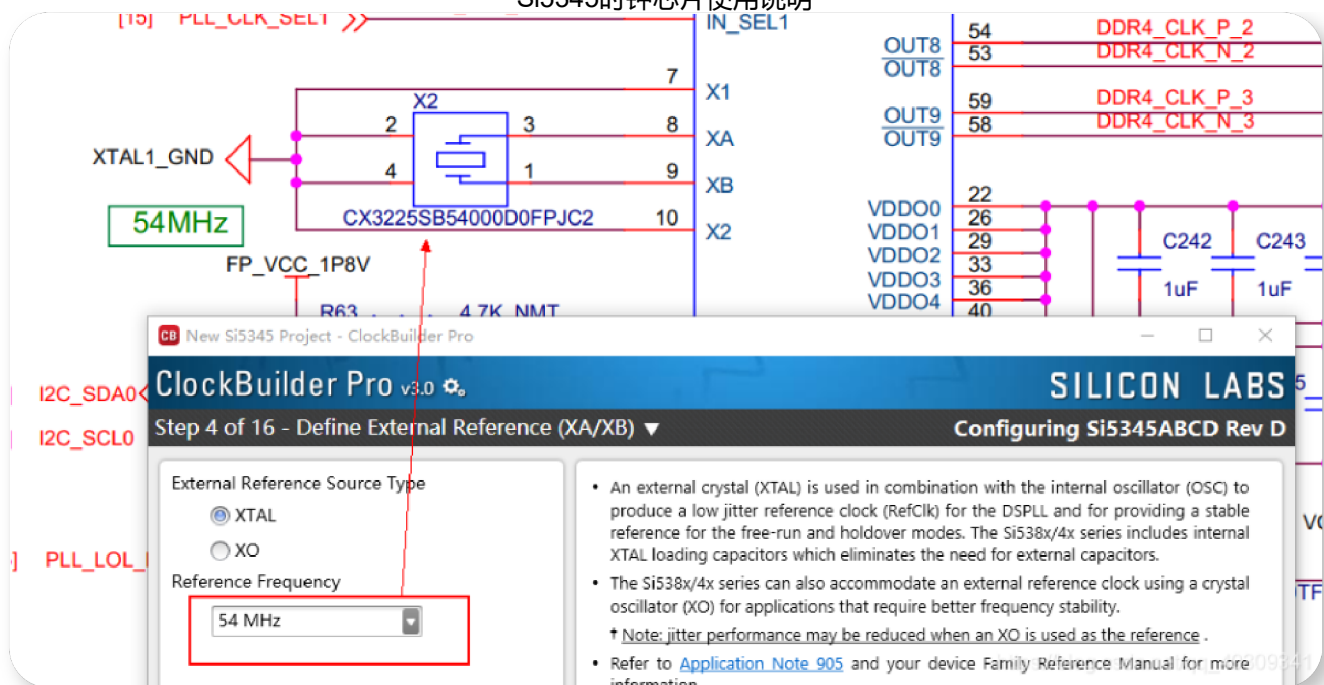


7、忽略free run模式

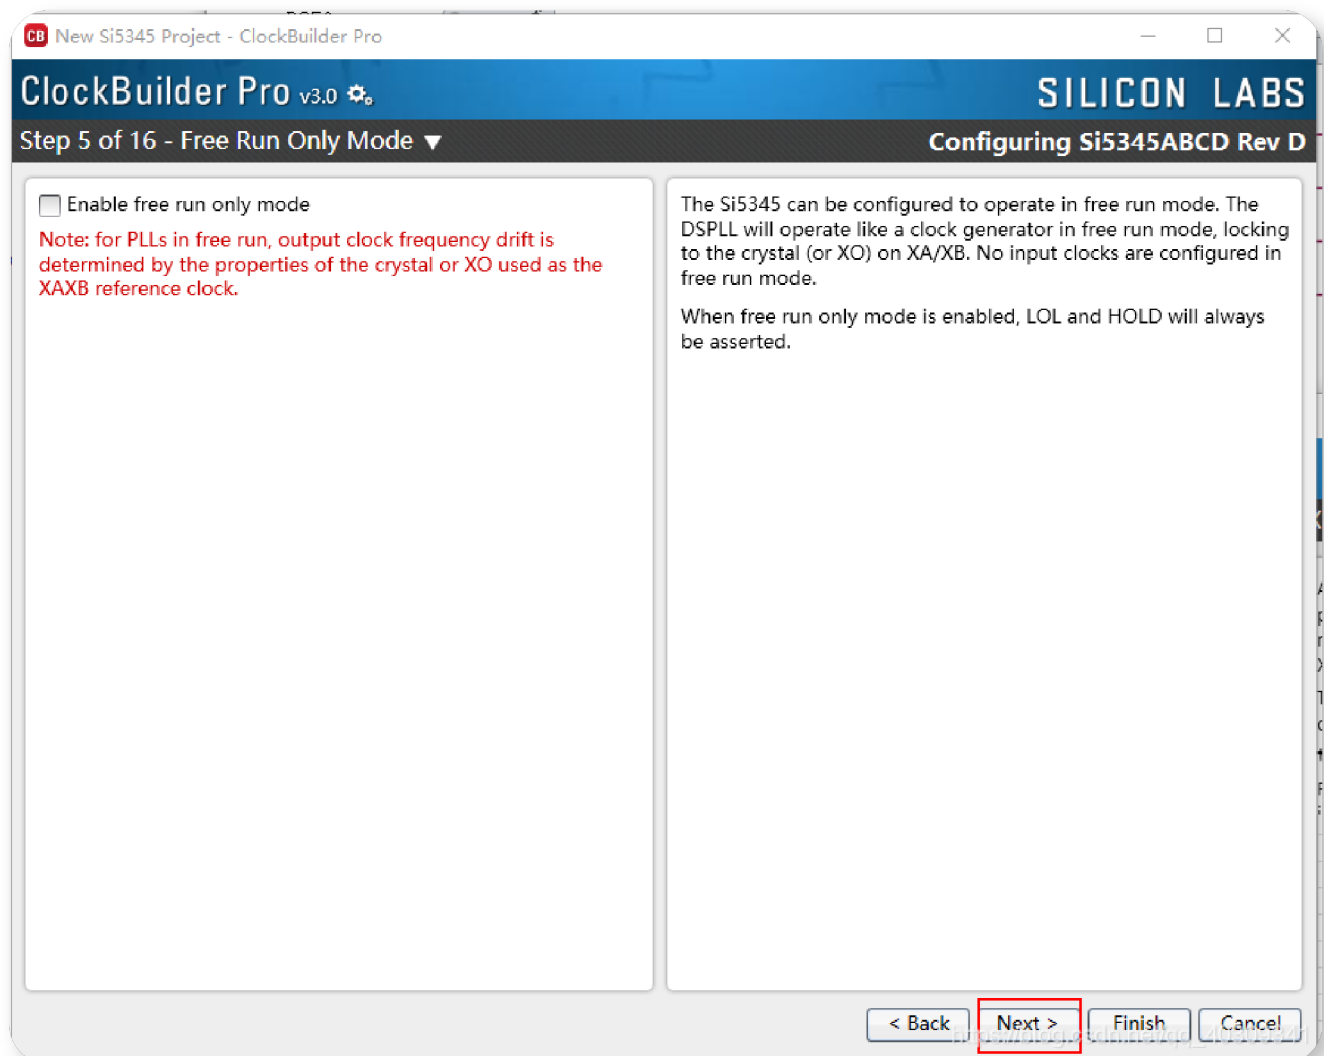


8、忽略Zero Delay模式

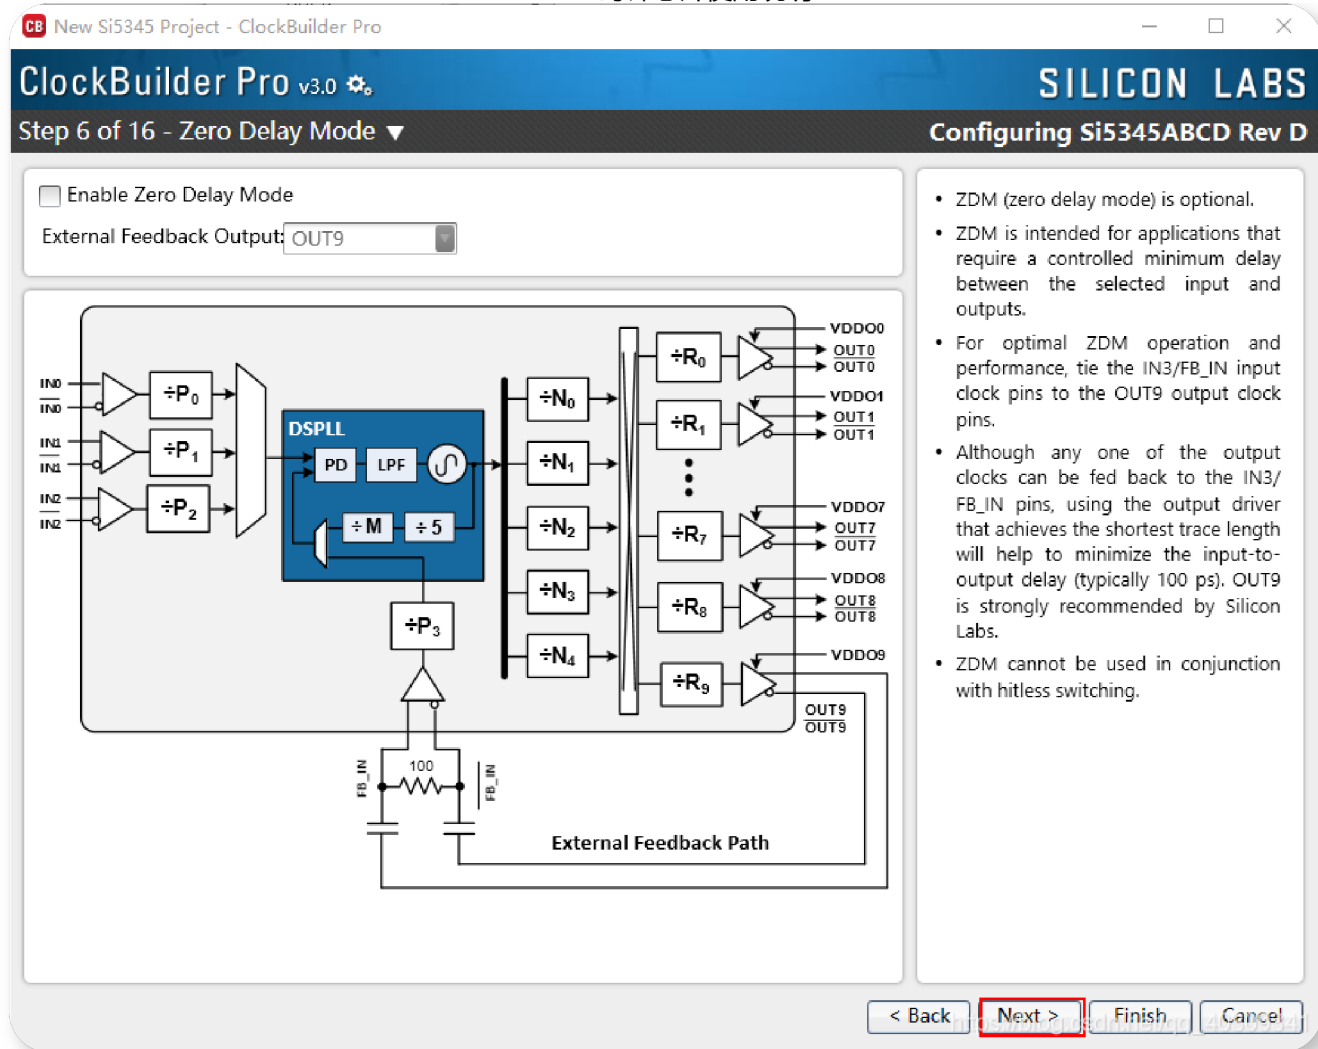


9、根据实际情况设置晶振输入源大小

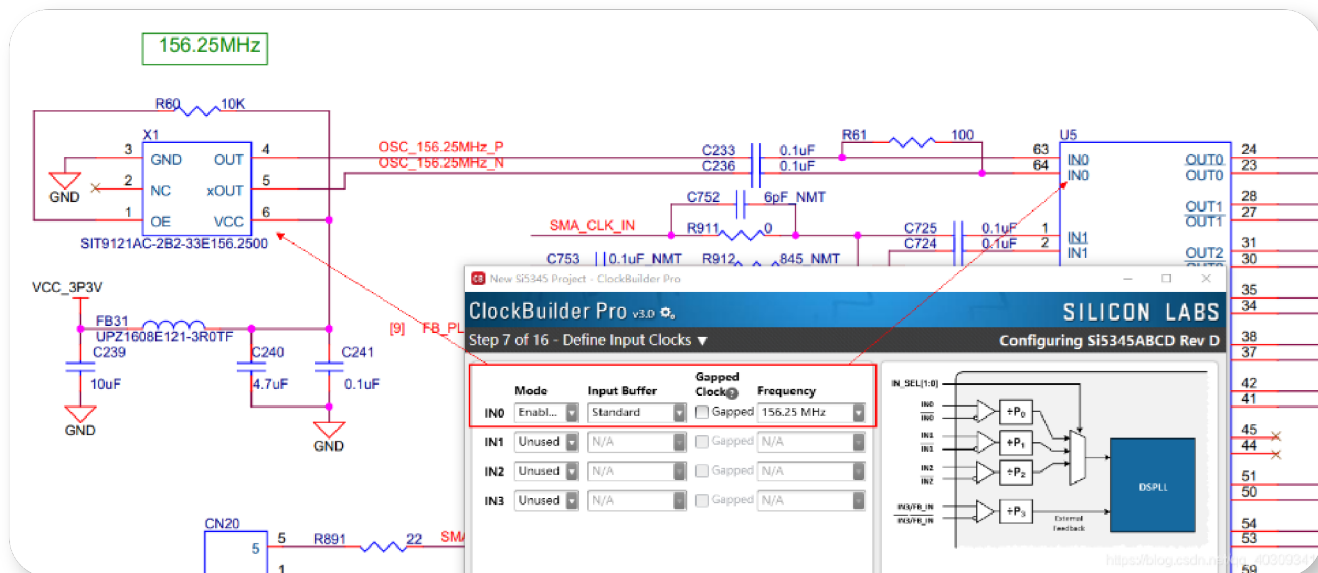

10、输出自定义频率大小或要求的大小

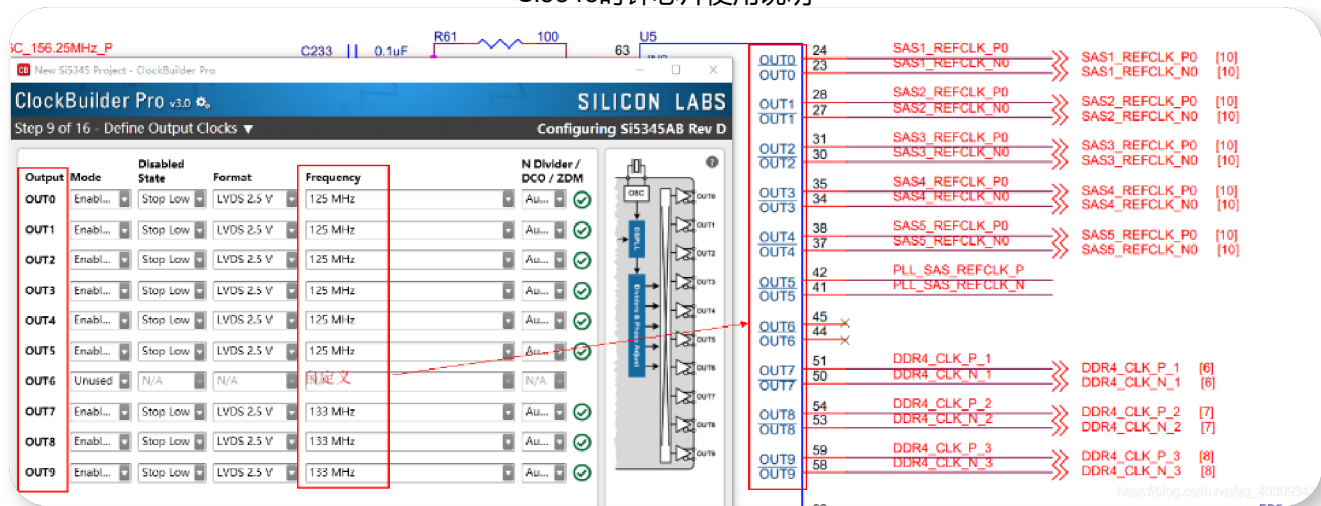

11、导出文件[Export]

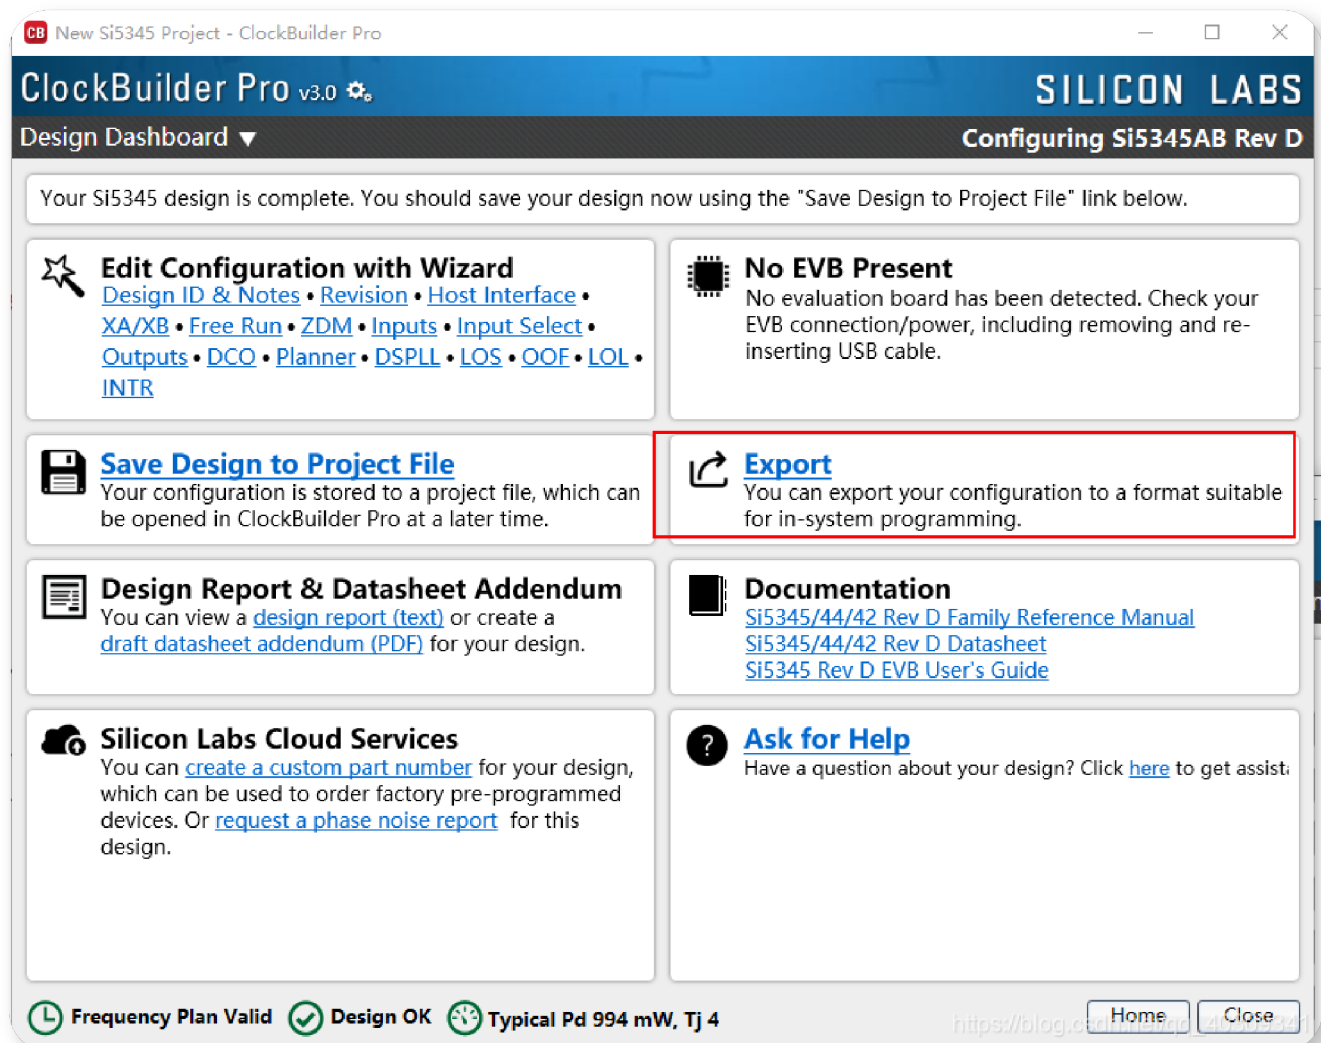

12、根据实际情况保存成对应的文件类型

Introduction

Register File

Settings File

Multi-Project Register/Settings

Regmap

About Register Export

This export will contain the registers that need to be written to the Si5345 to achieve your design/configuration.

A command line version of this tool is available. Type **CBProProjectRegistersExport --help** from a command prompt to learn more.

Options

Export Type:

☒ Comma Separated Values (CSV) File

Each line in the file is an address,data pair in hexadecimal format. A comma separates the address and data fields.

☐ C Code Header File

The register write sequence is expressed in C code via an array of address,data pairs. This can be used directly in firmware code.

☒ Include summary header

If checked, an informational header will be included at the top of the file. Each line in the header will be prefixed by the # character. The header will contain some basic information about the design, tool, and a timestamp.

☒ Include pre- and post-write control register writes

Certain control registers must be written before and after writing the volatile configuration registers. This ensures the device is stable during configuration download and resumes normal operation after the download is complete. You can turn inclusion of this sequence off if your host system is managing this process already.

Preview Export ..

Save to File ..