





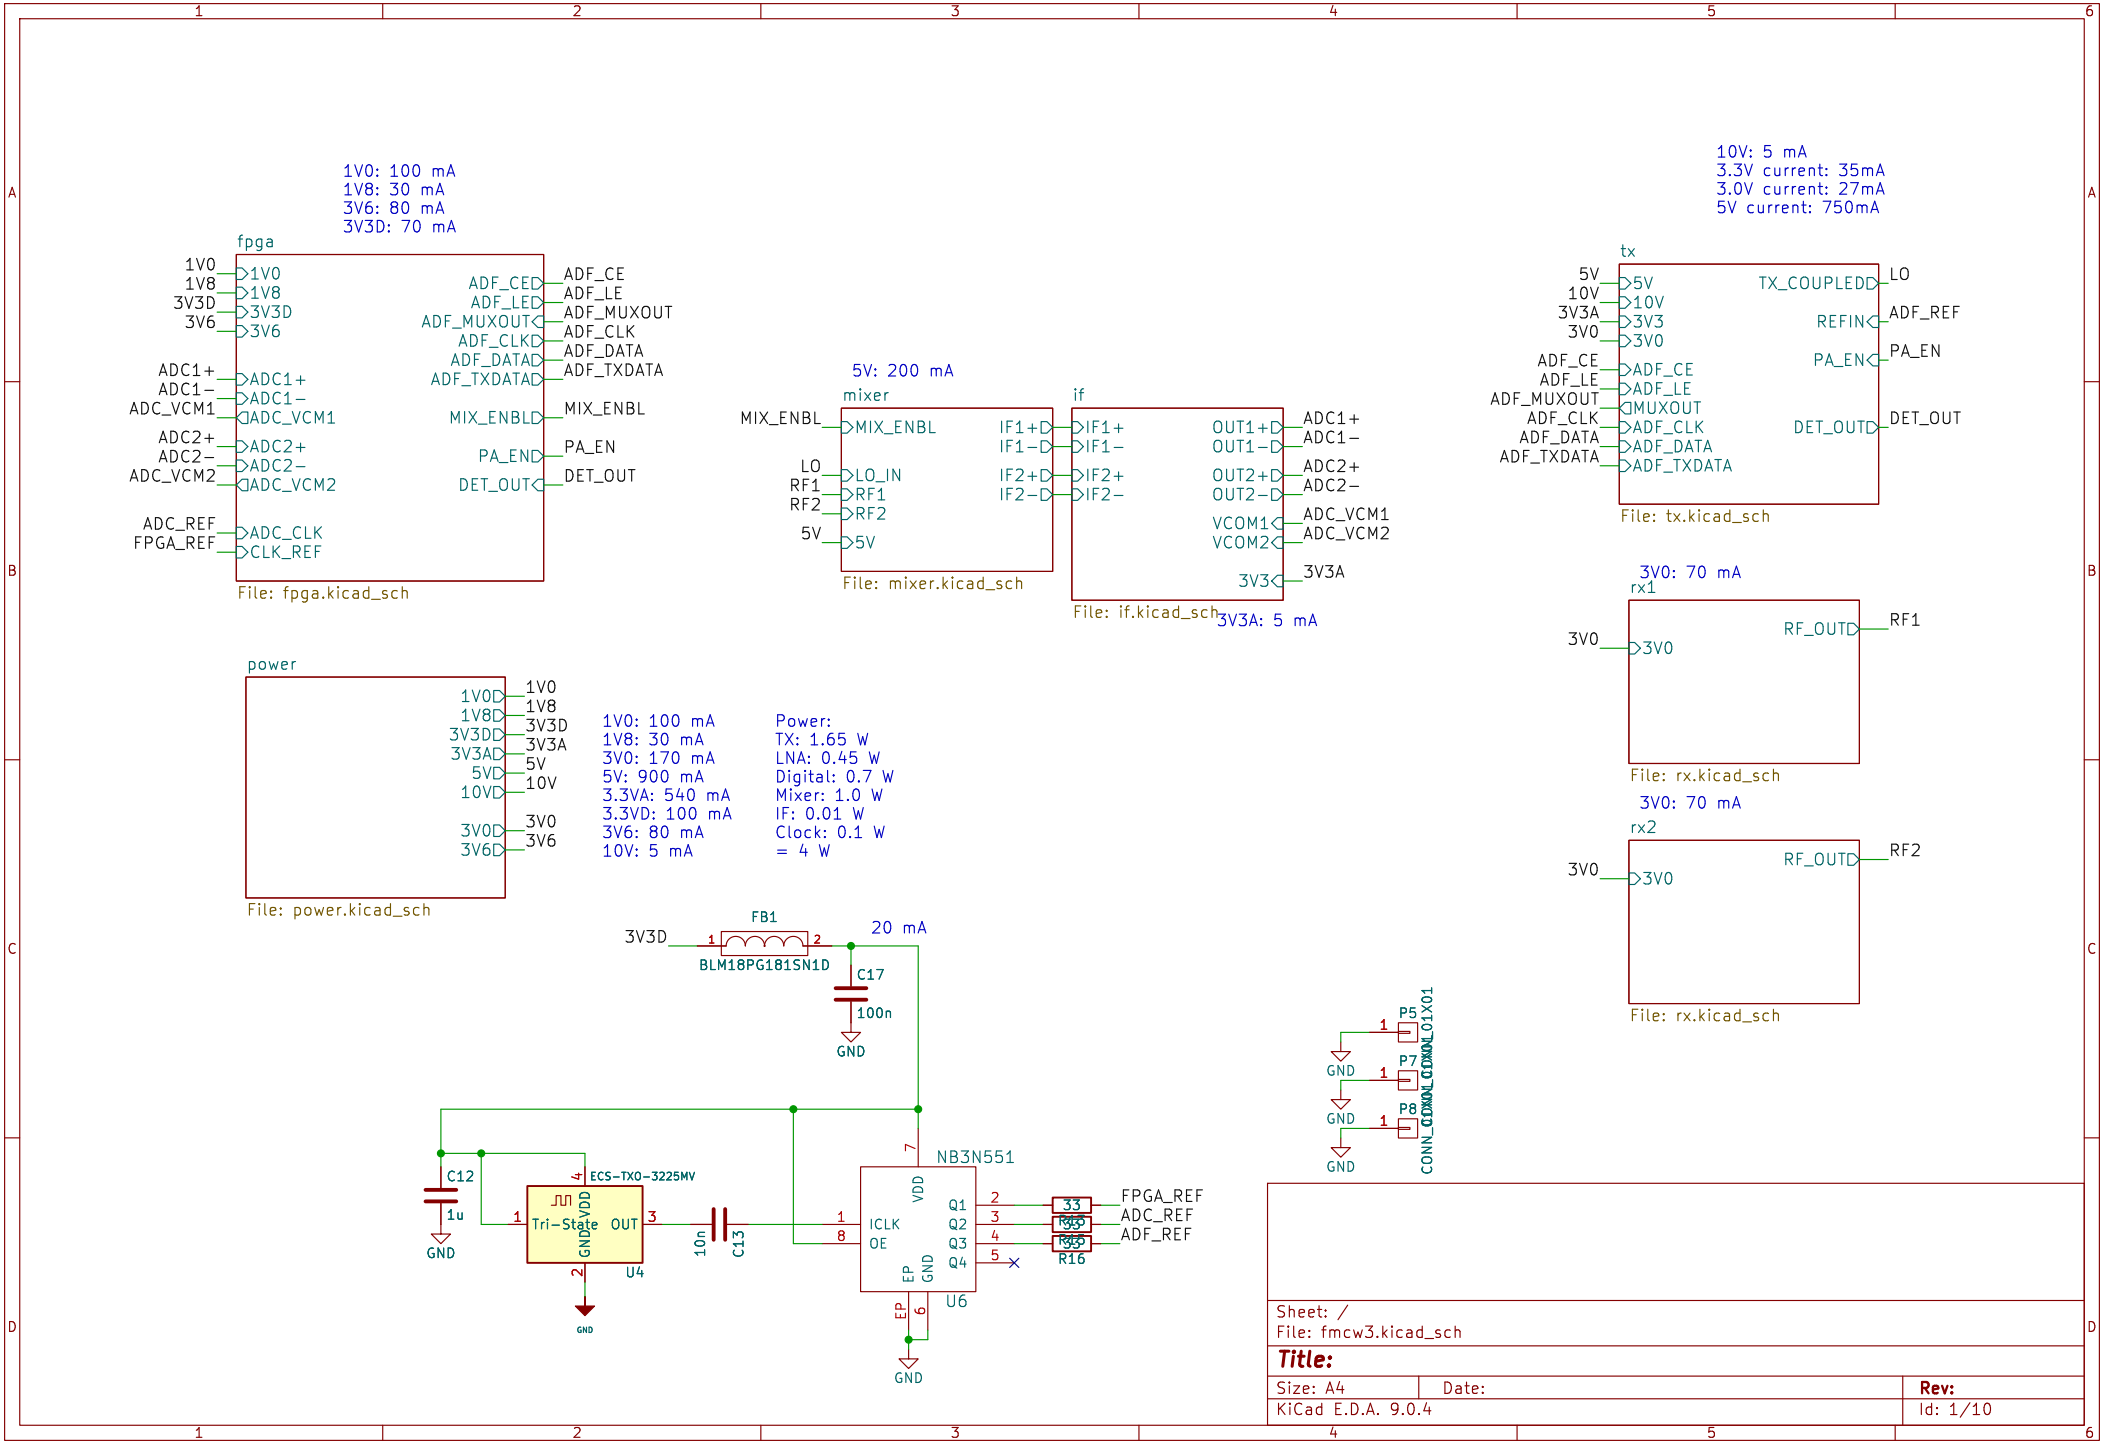

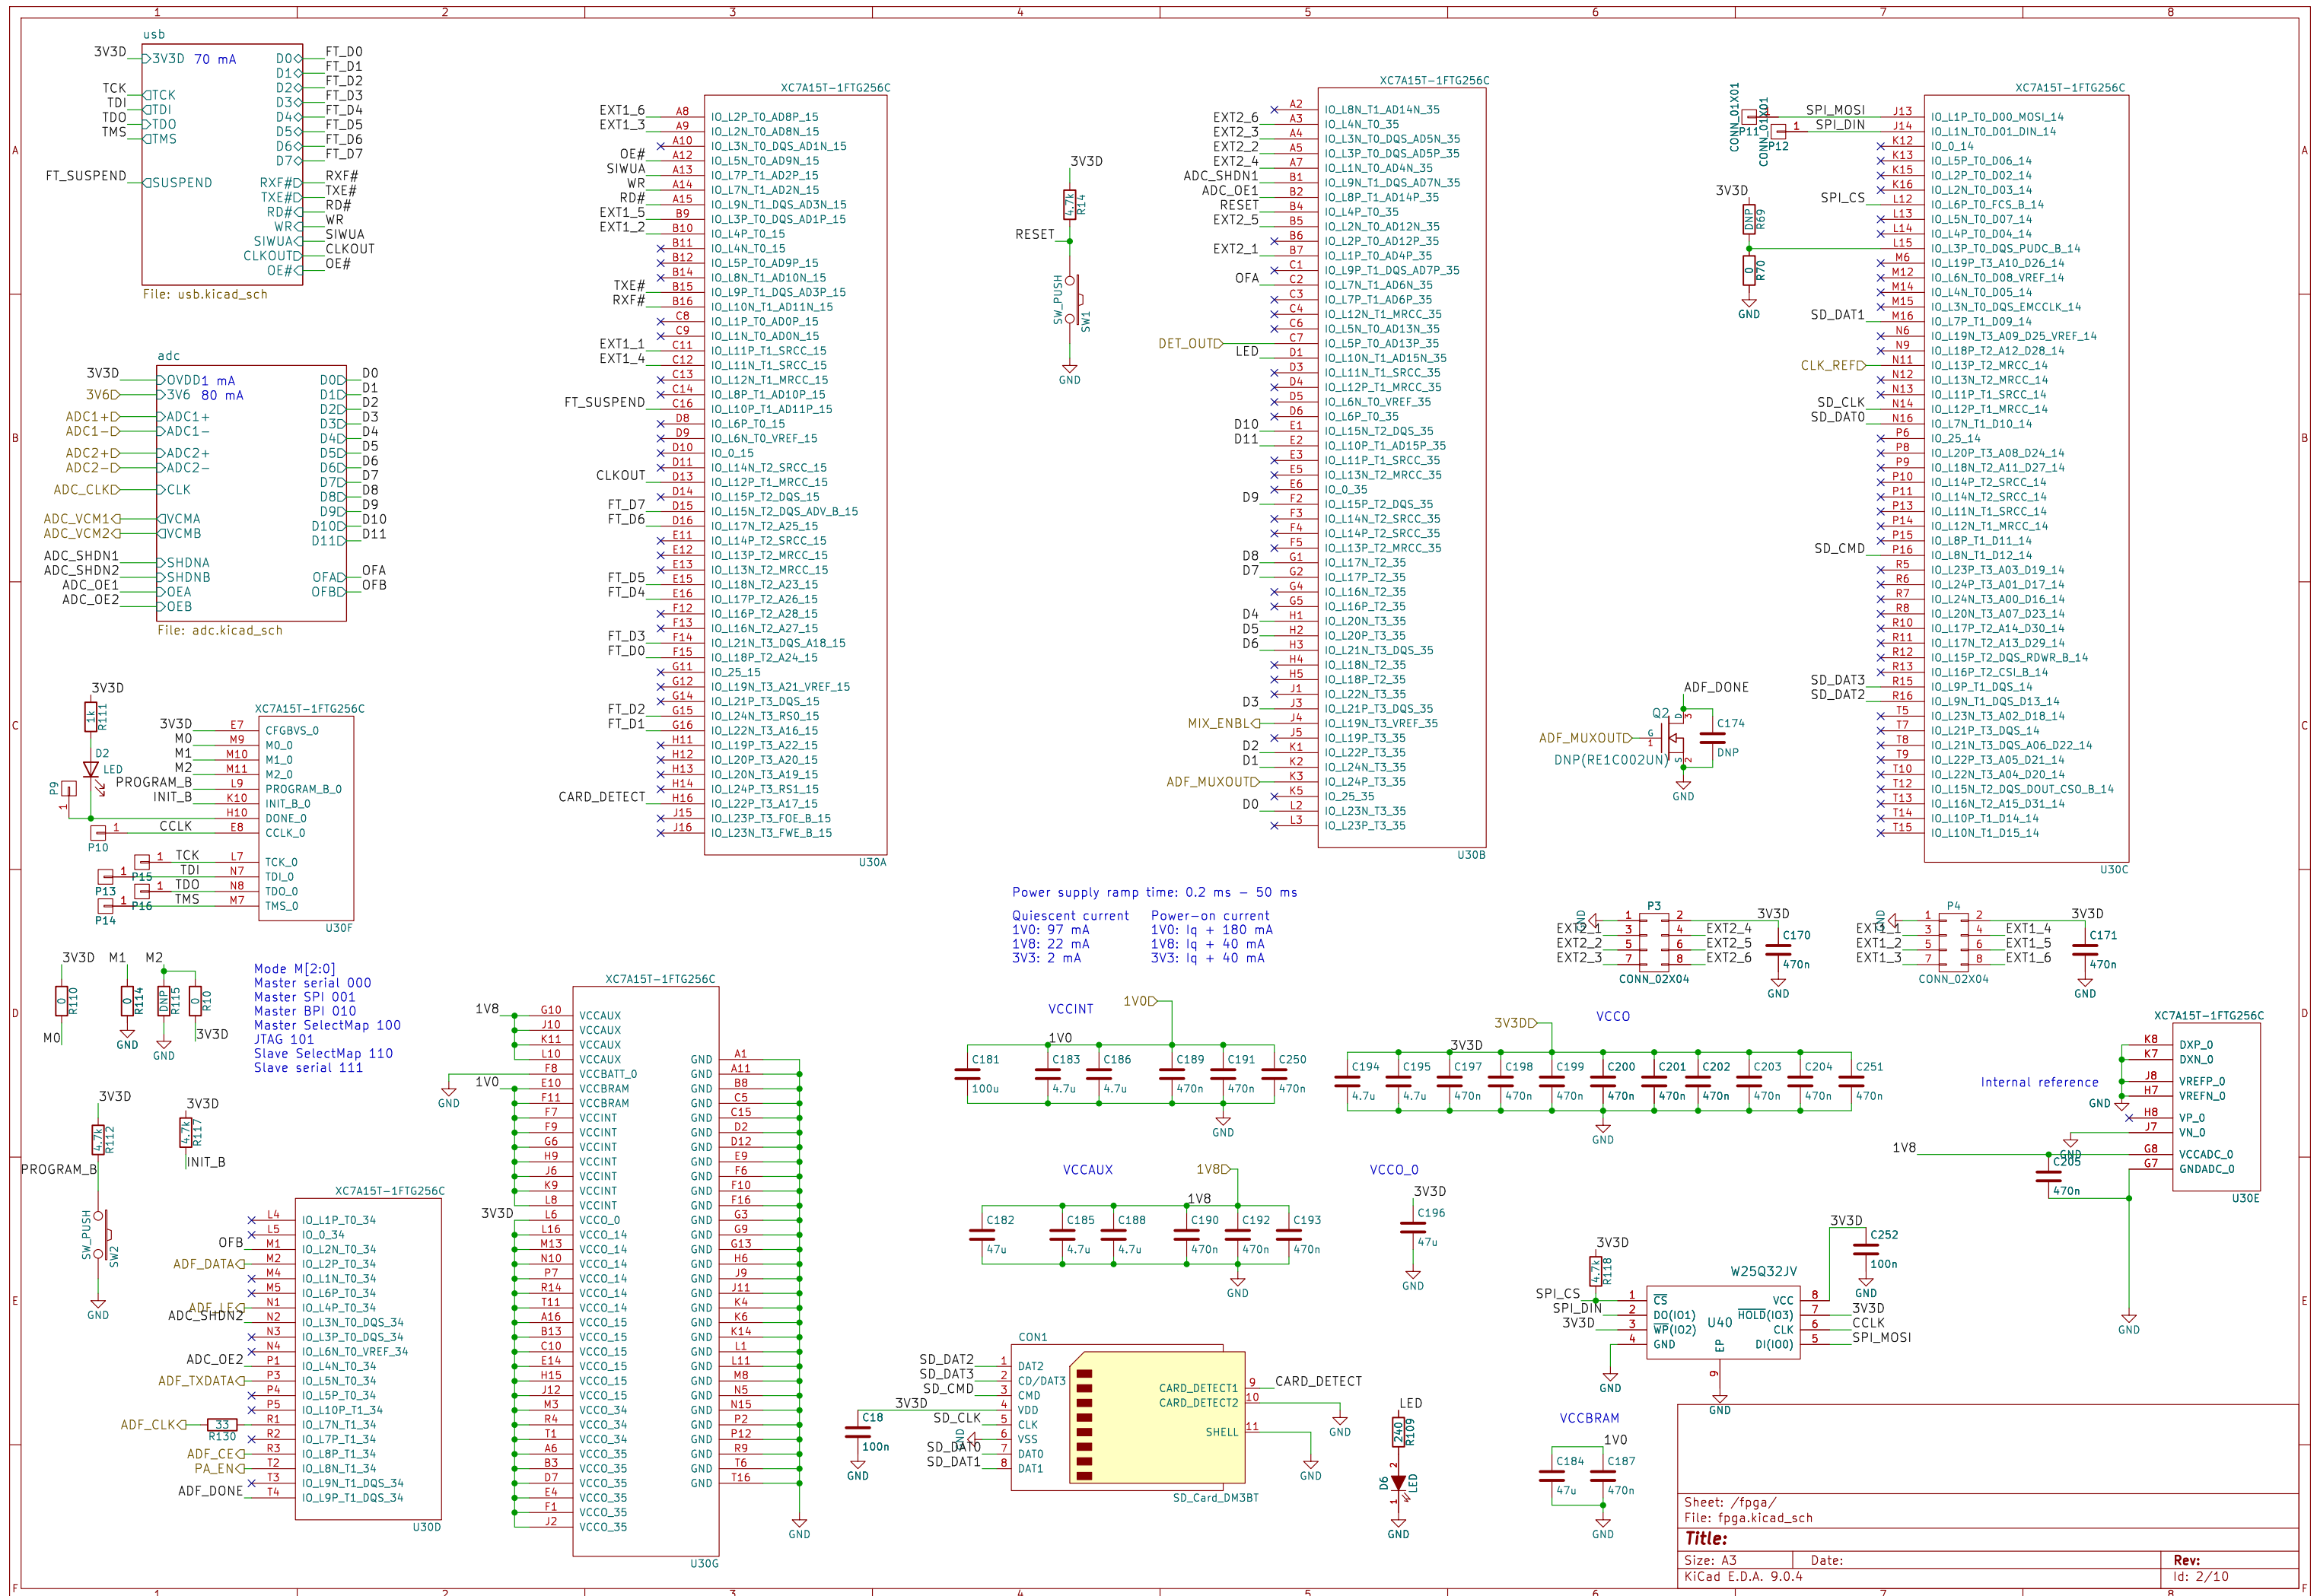


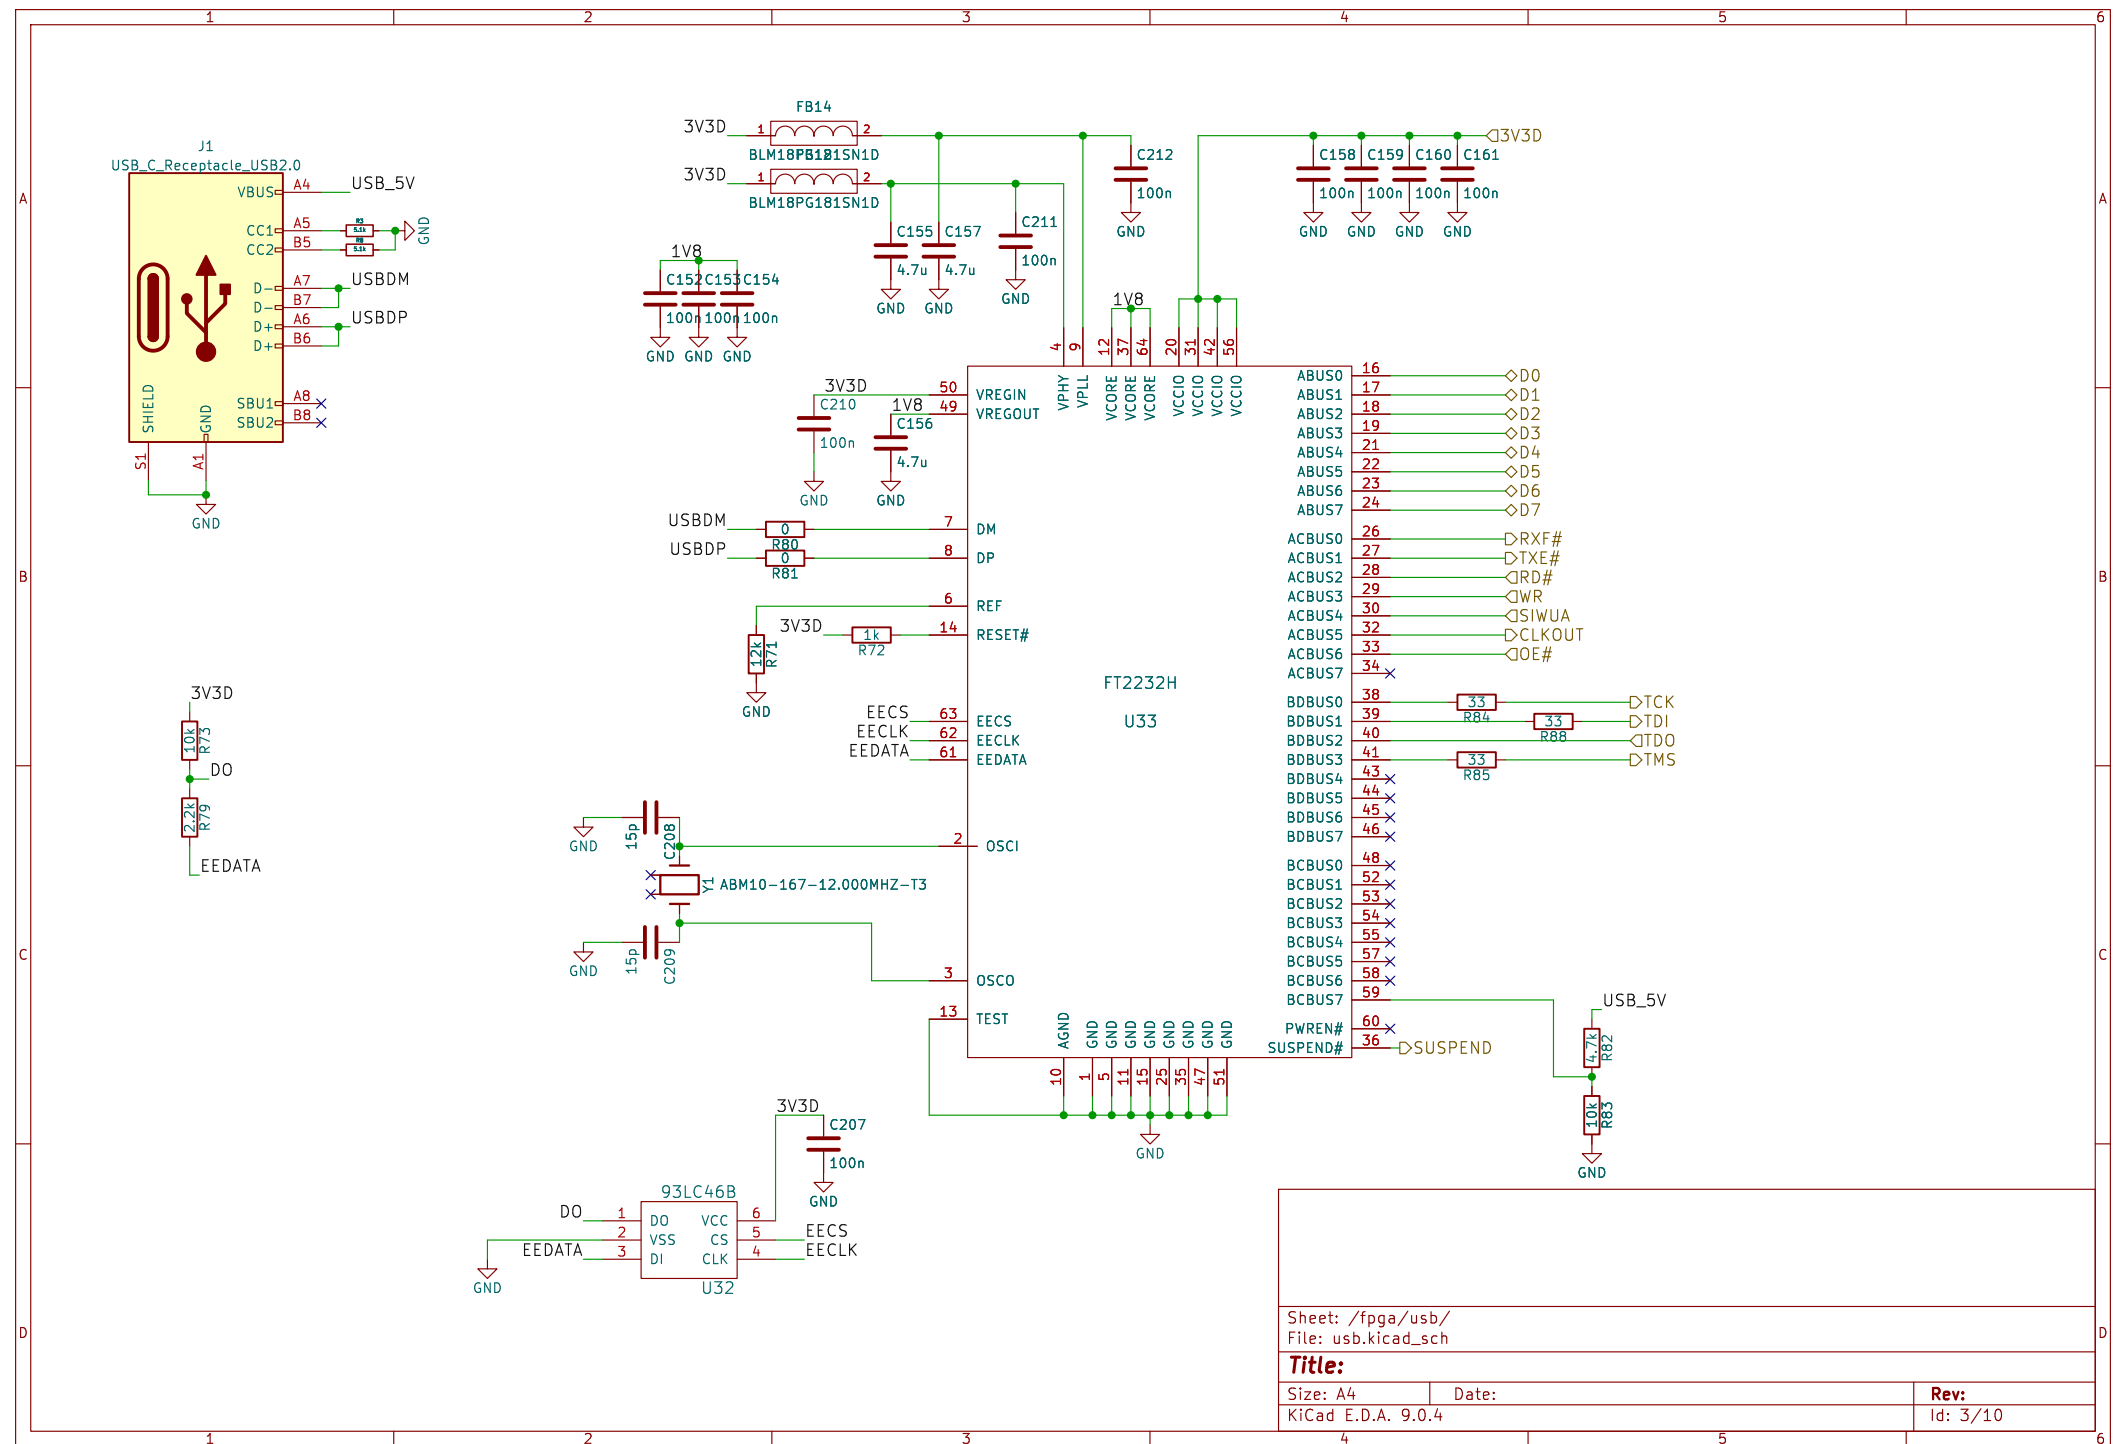

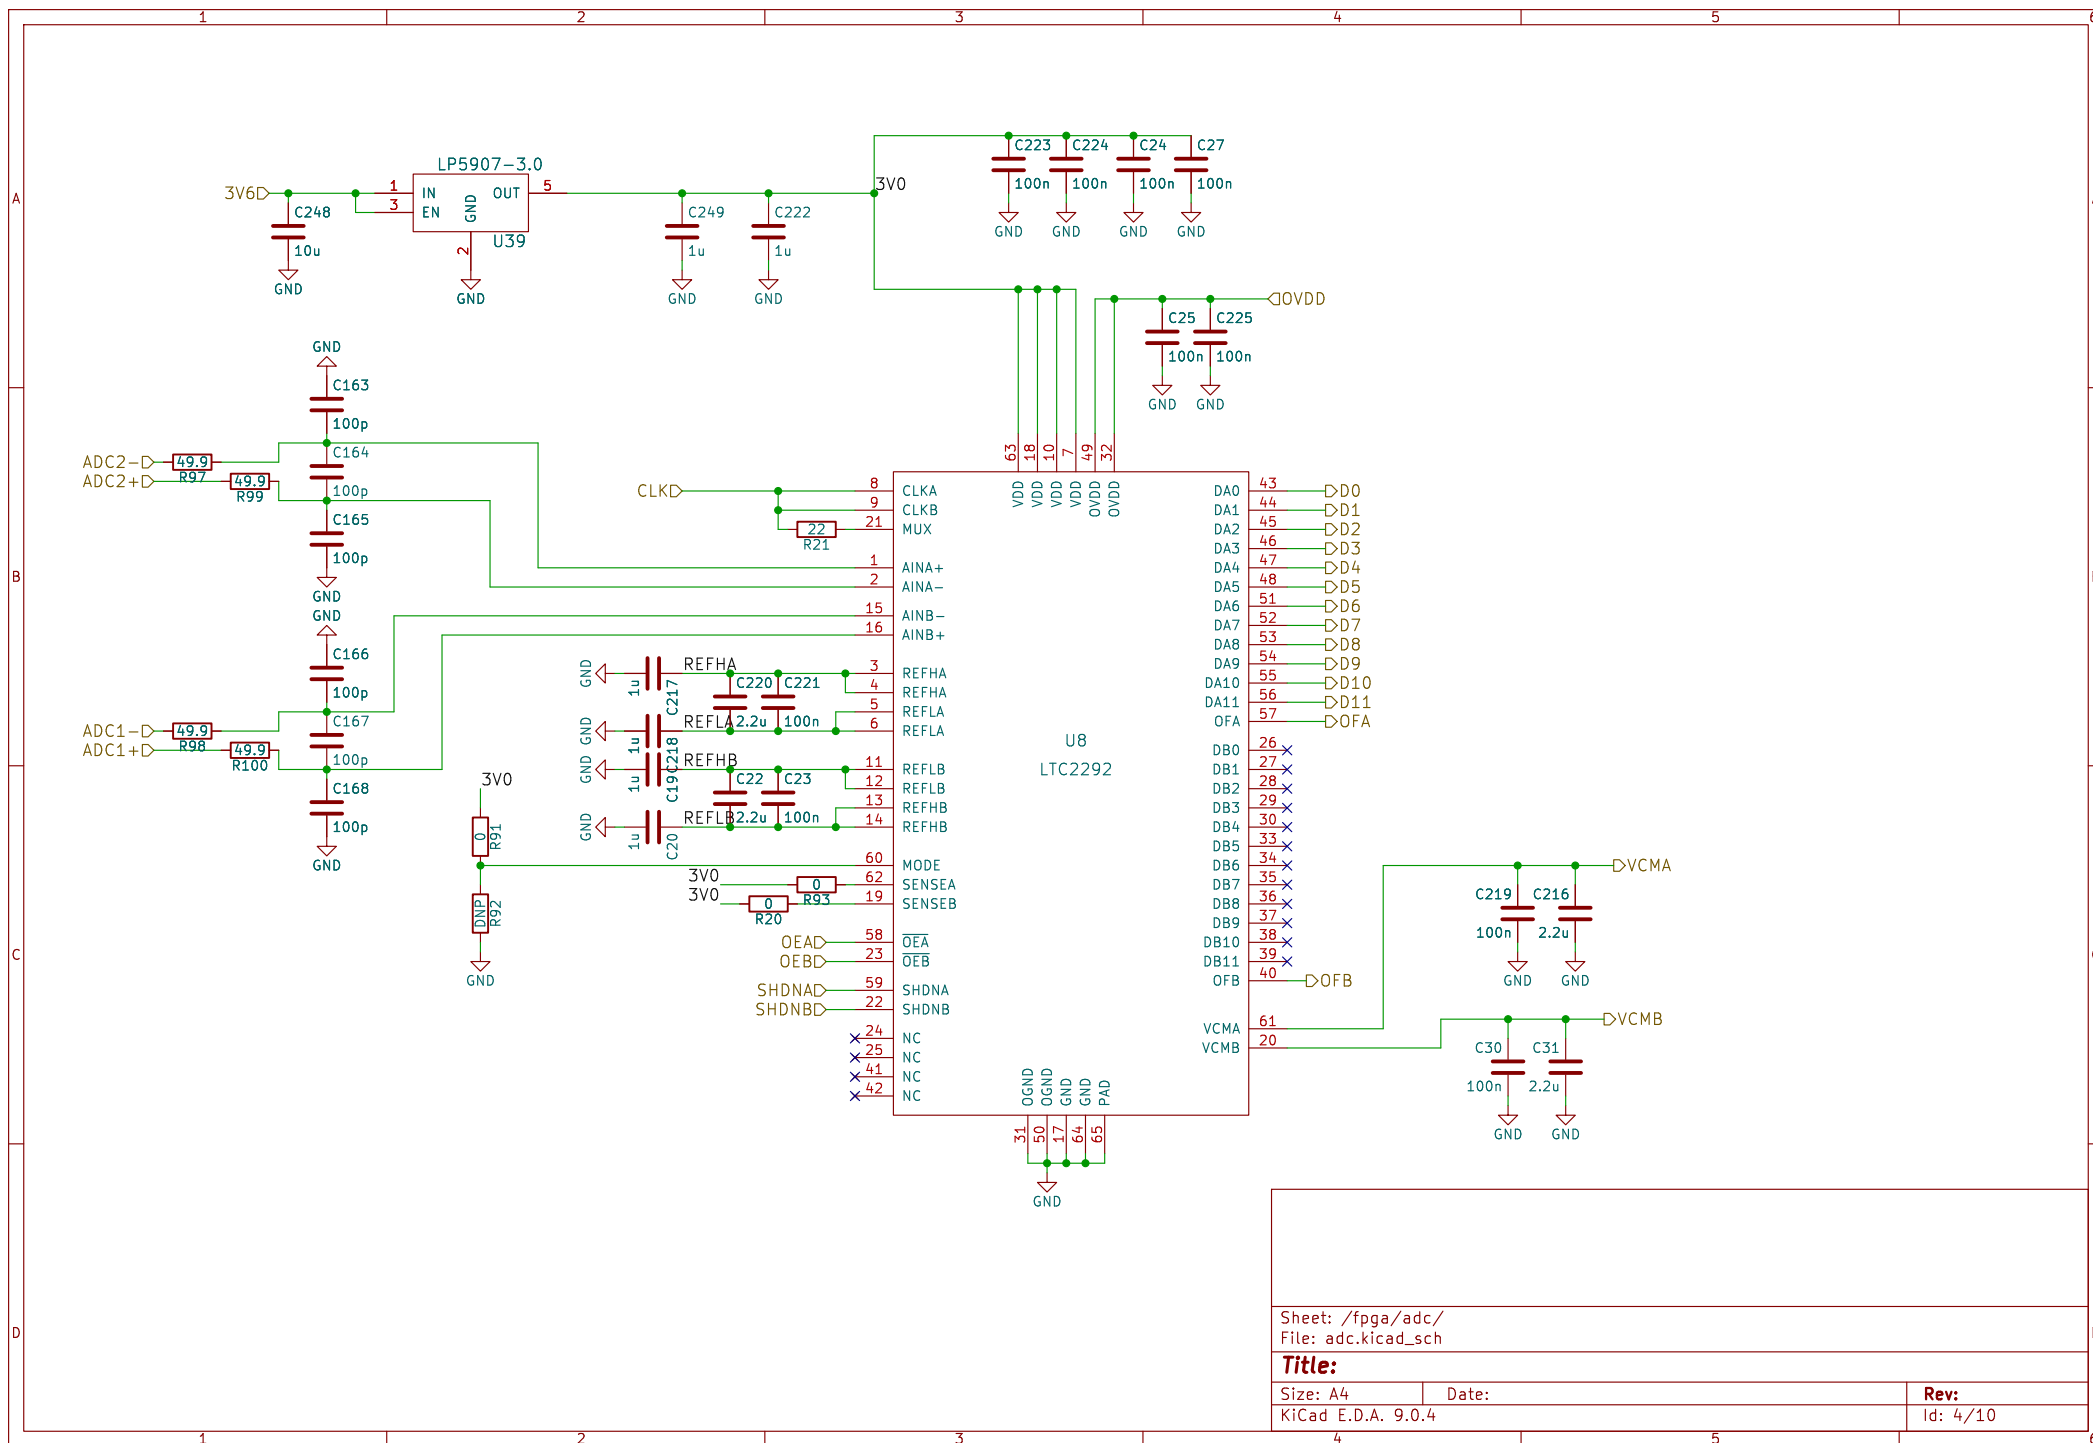

In the Artix-7 data sheet it states that the recommended power-on sequence is VCCINT, VCCBRAM, VCCAUX, and VCCO. 1v0 first 1v8 then 3v3 is the sequence so use power good

2A buck converter

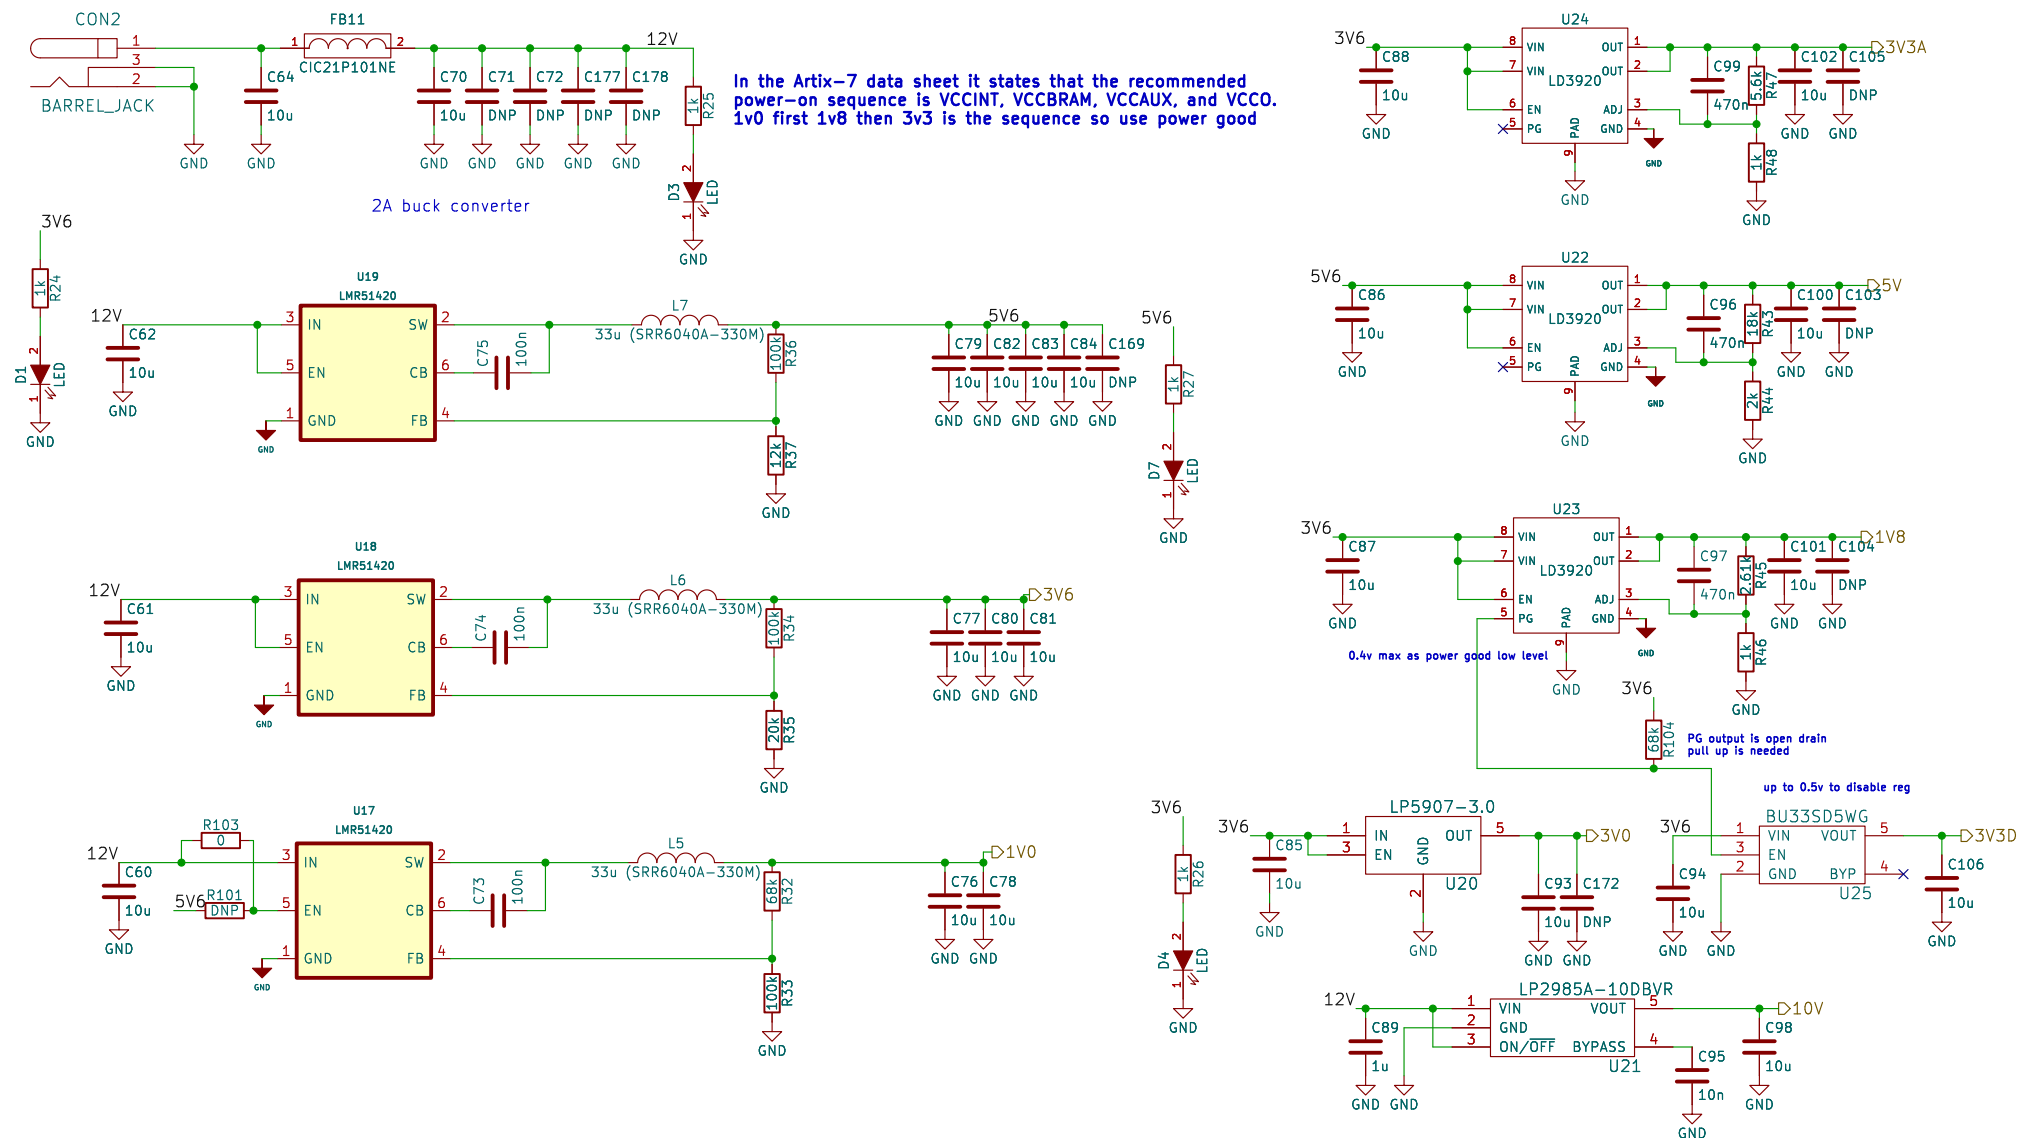

Sheet: /power/
File: power.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 5/10

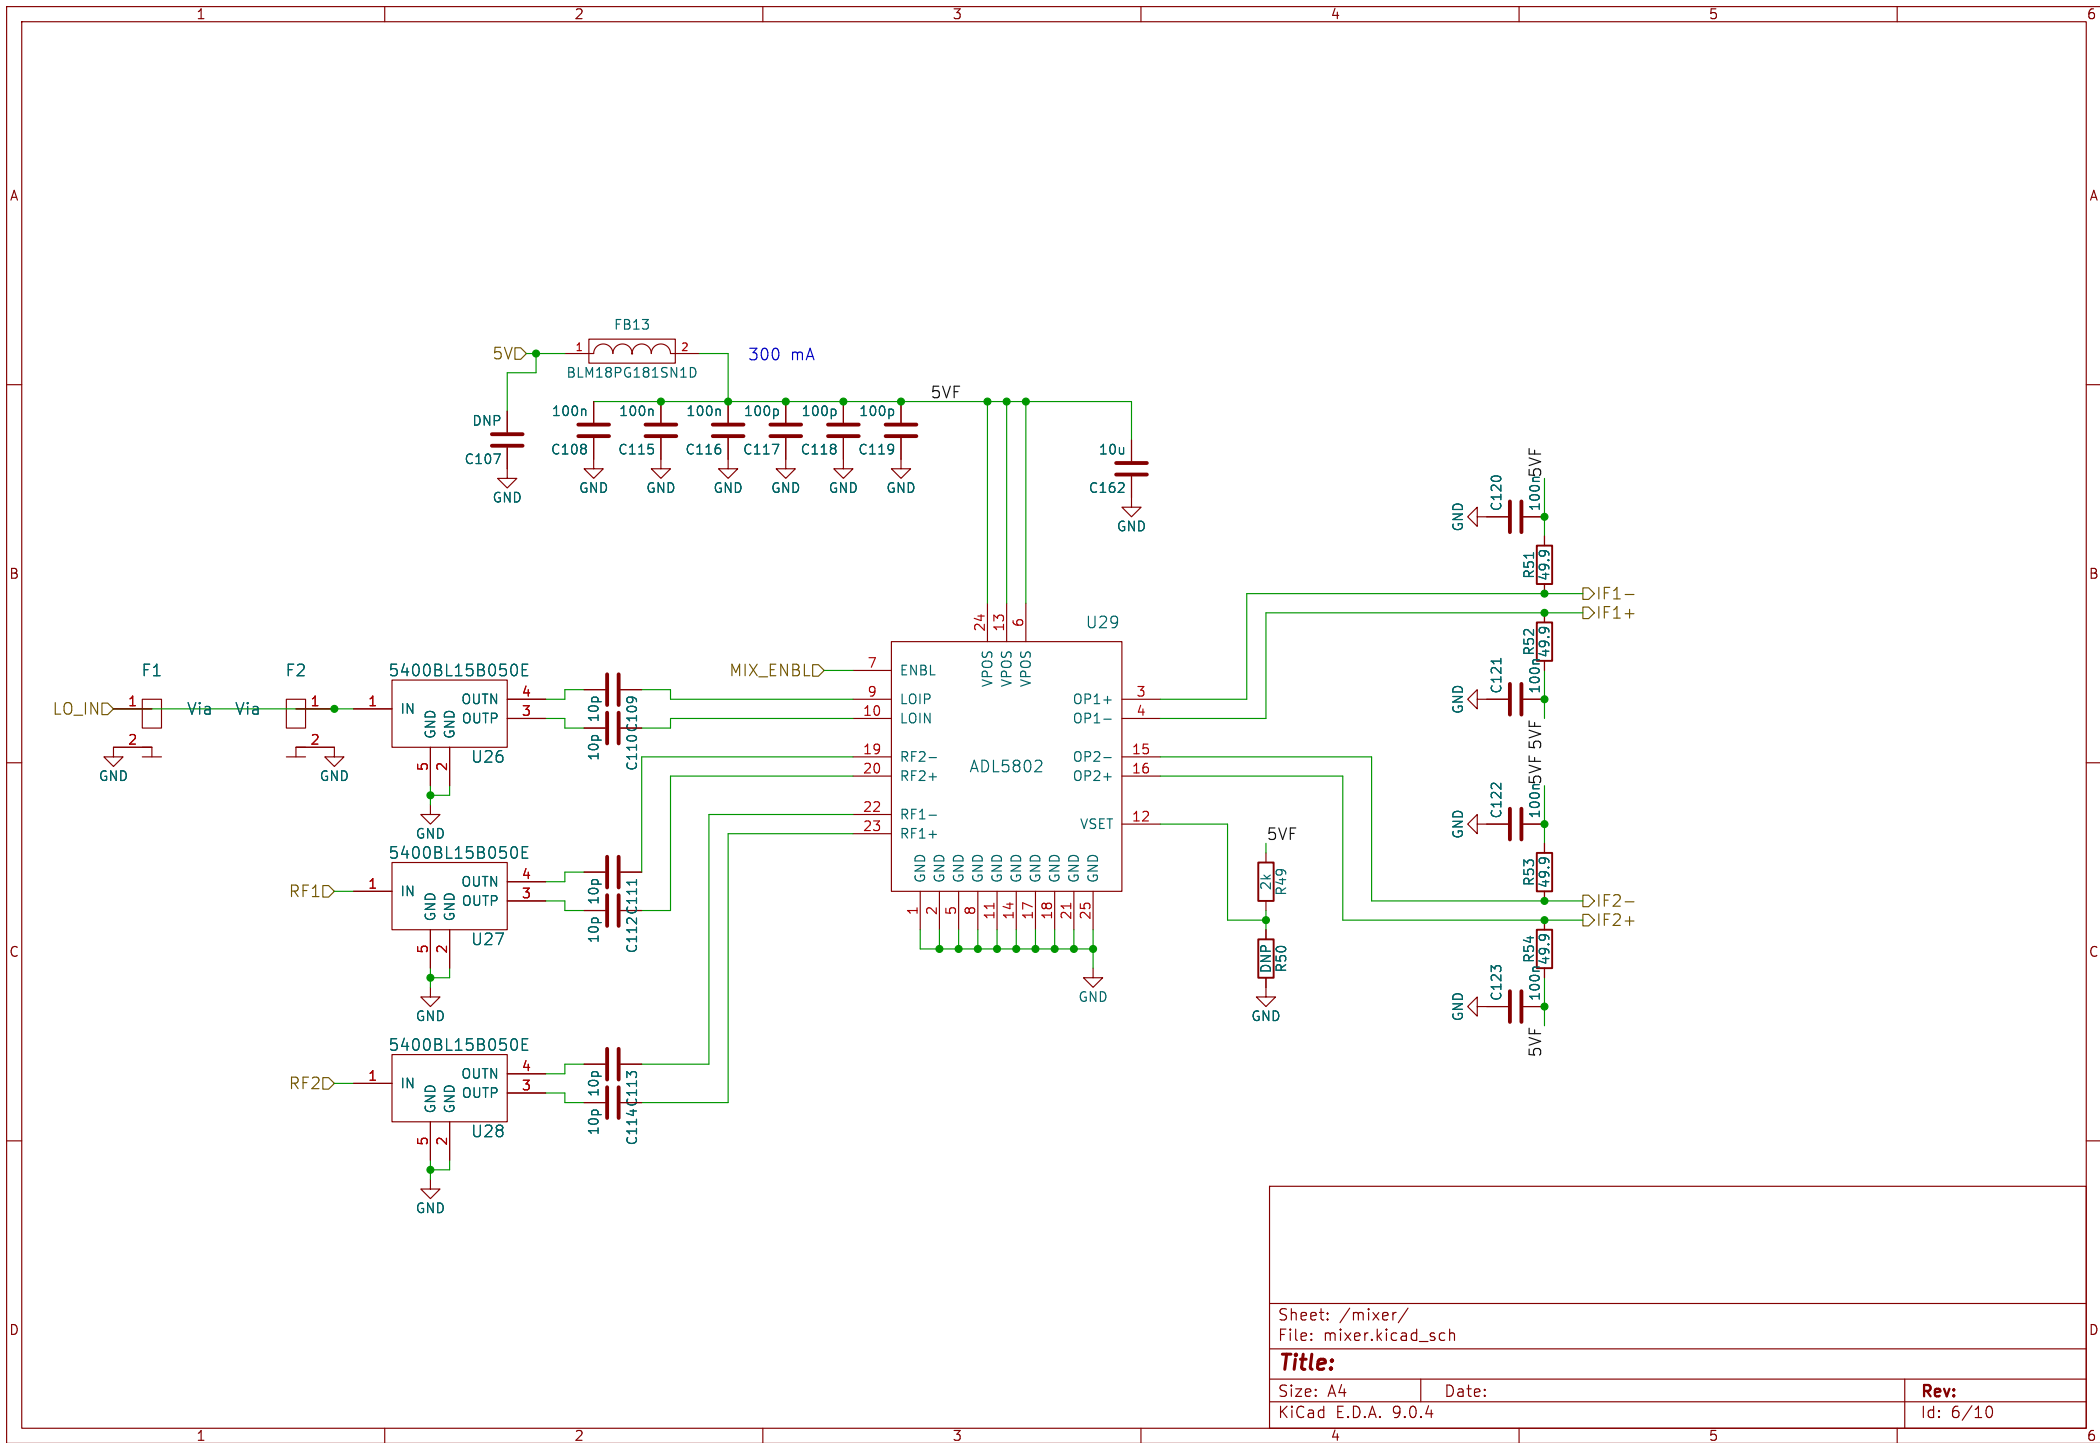

Sheet: /mixer/
File: mixer.kicad_sch

Title:


Size: A4


Date:


KiCad E.D.A. 9.0.4

Rev:

Id: 6/10

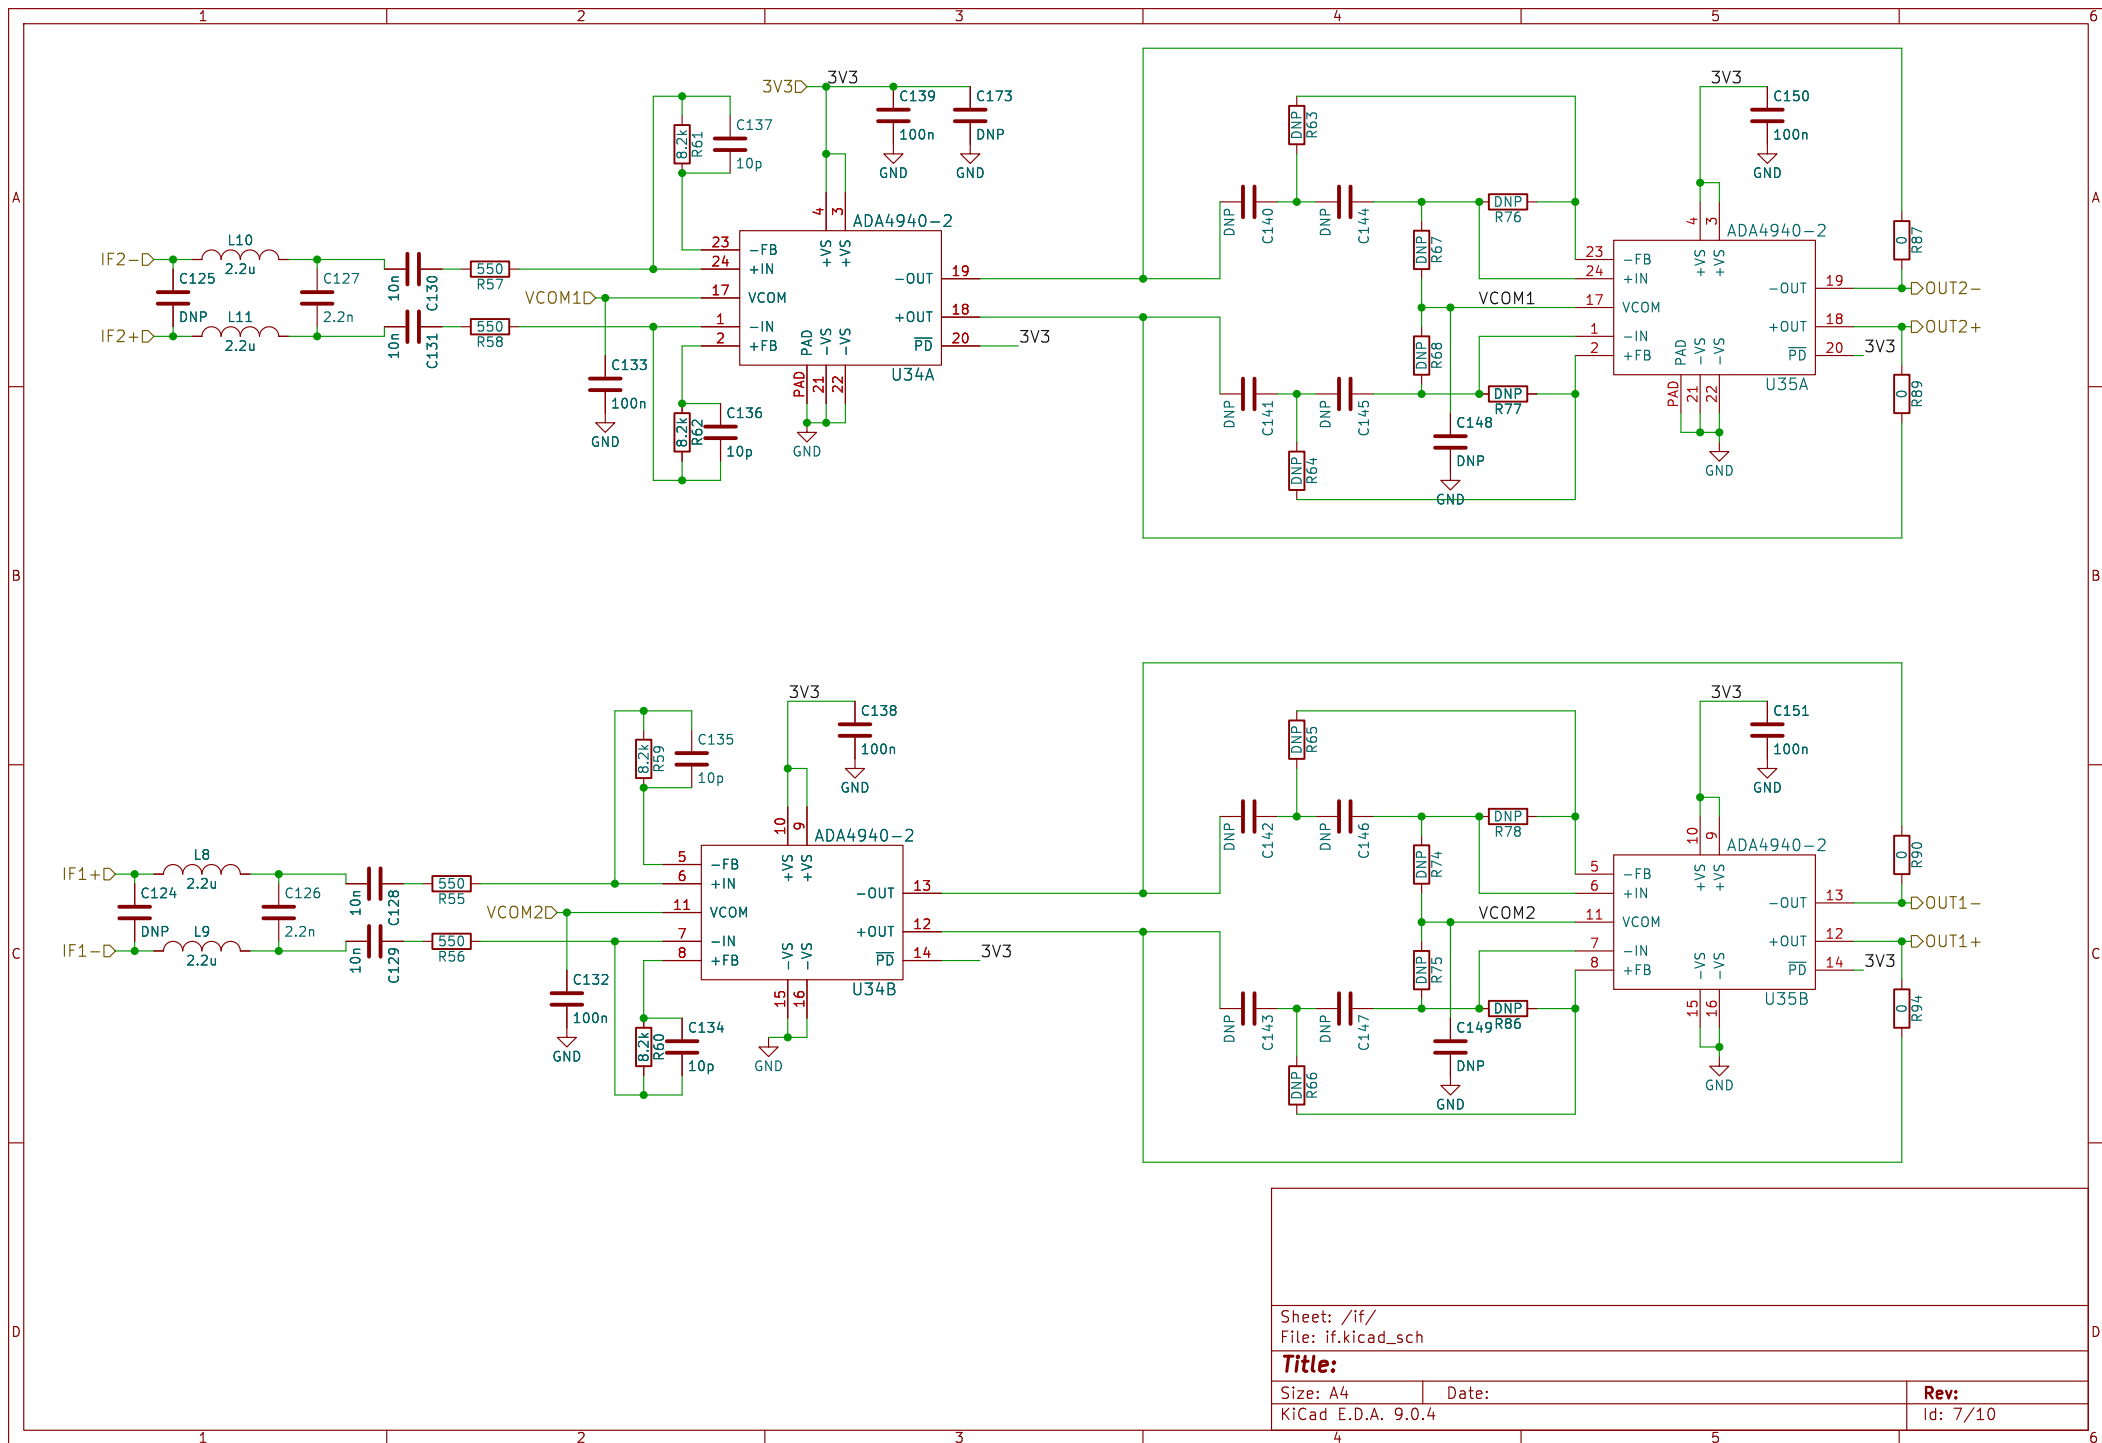

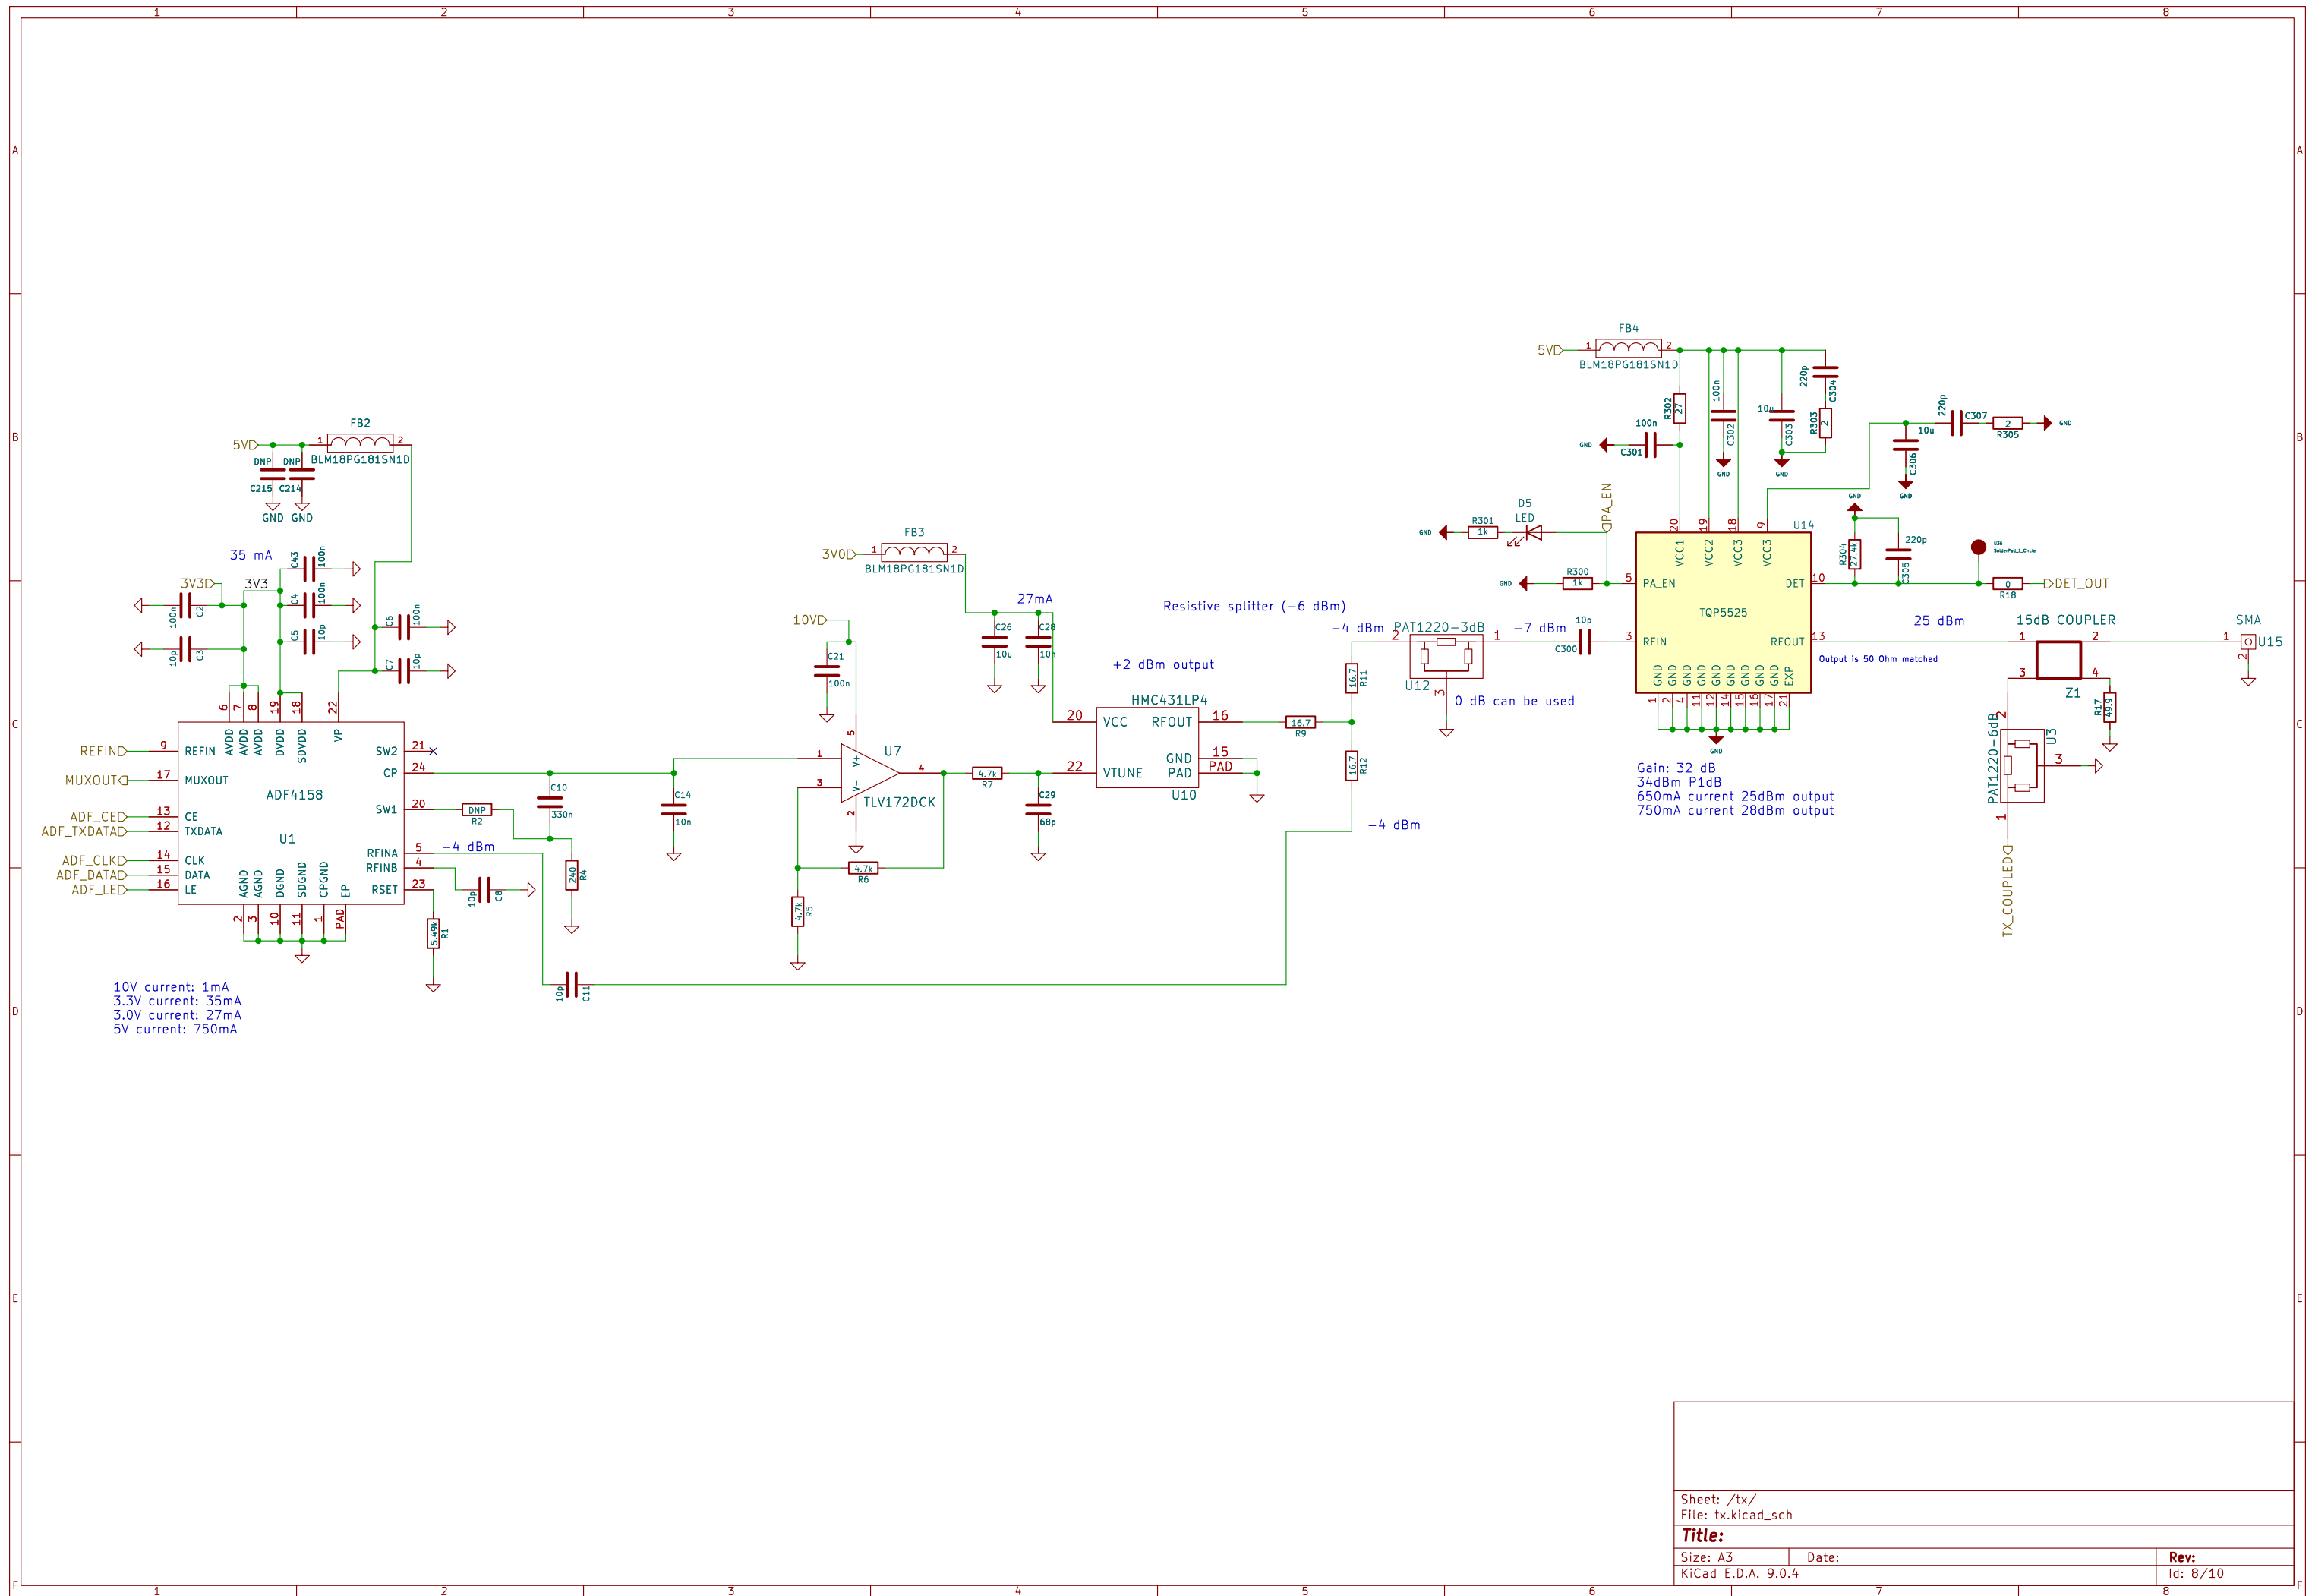

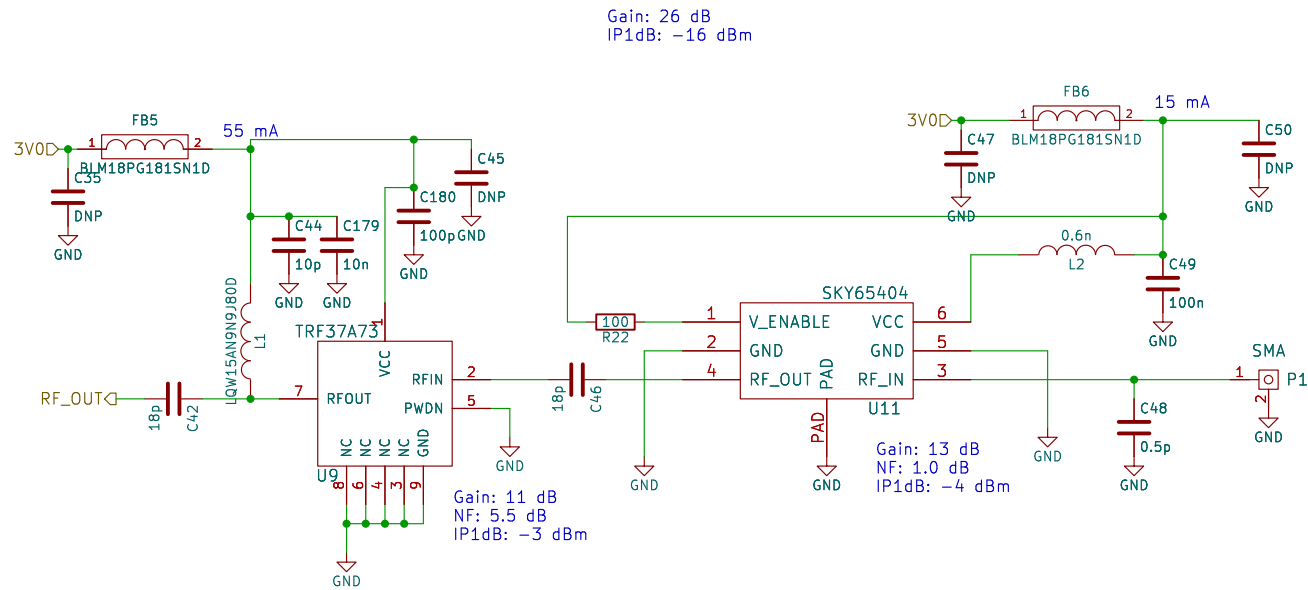

Sheet: /rx1/
File: rx.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 9/10

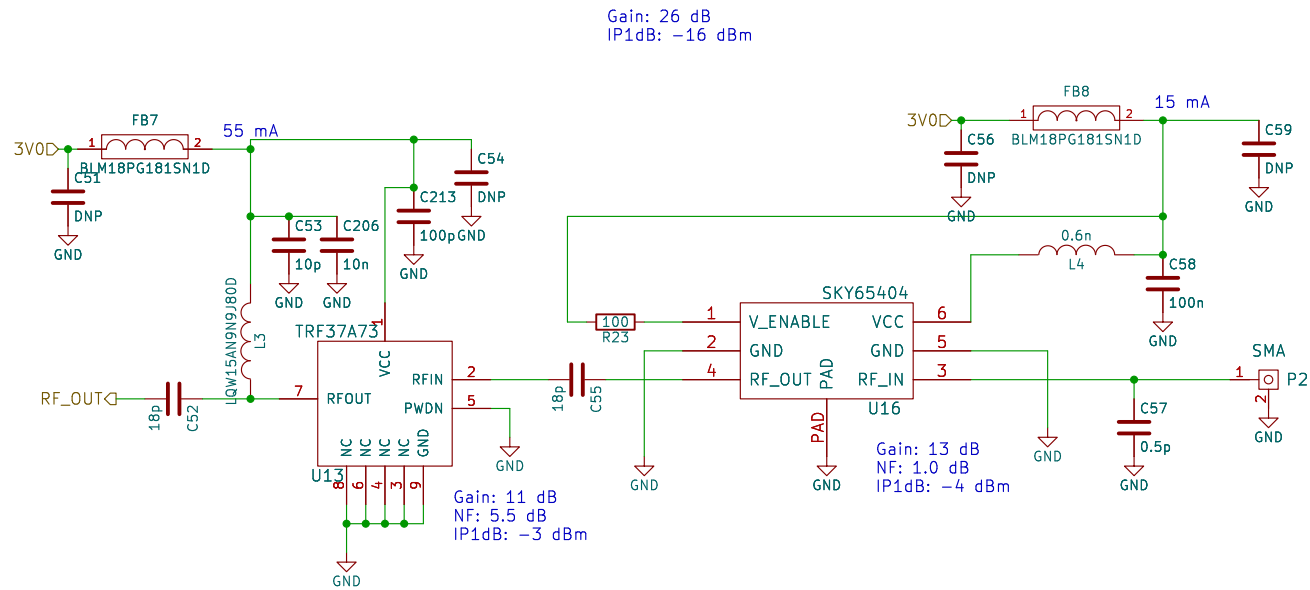

Sheet: /rx2/
File: rx.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 10/10