





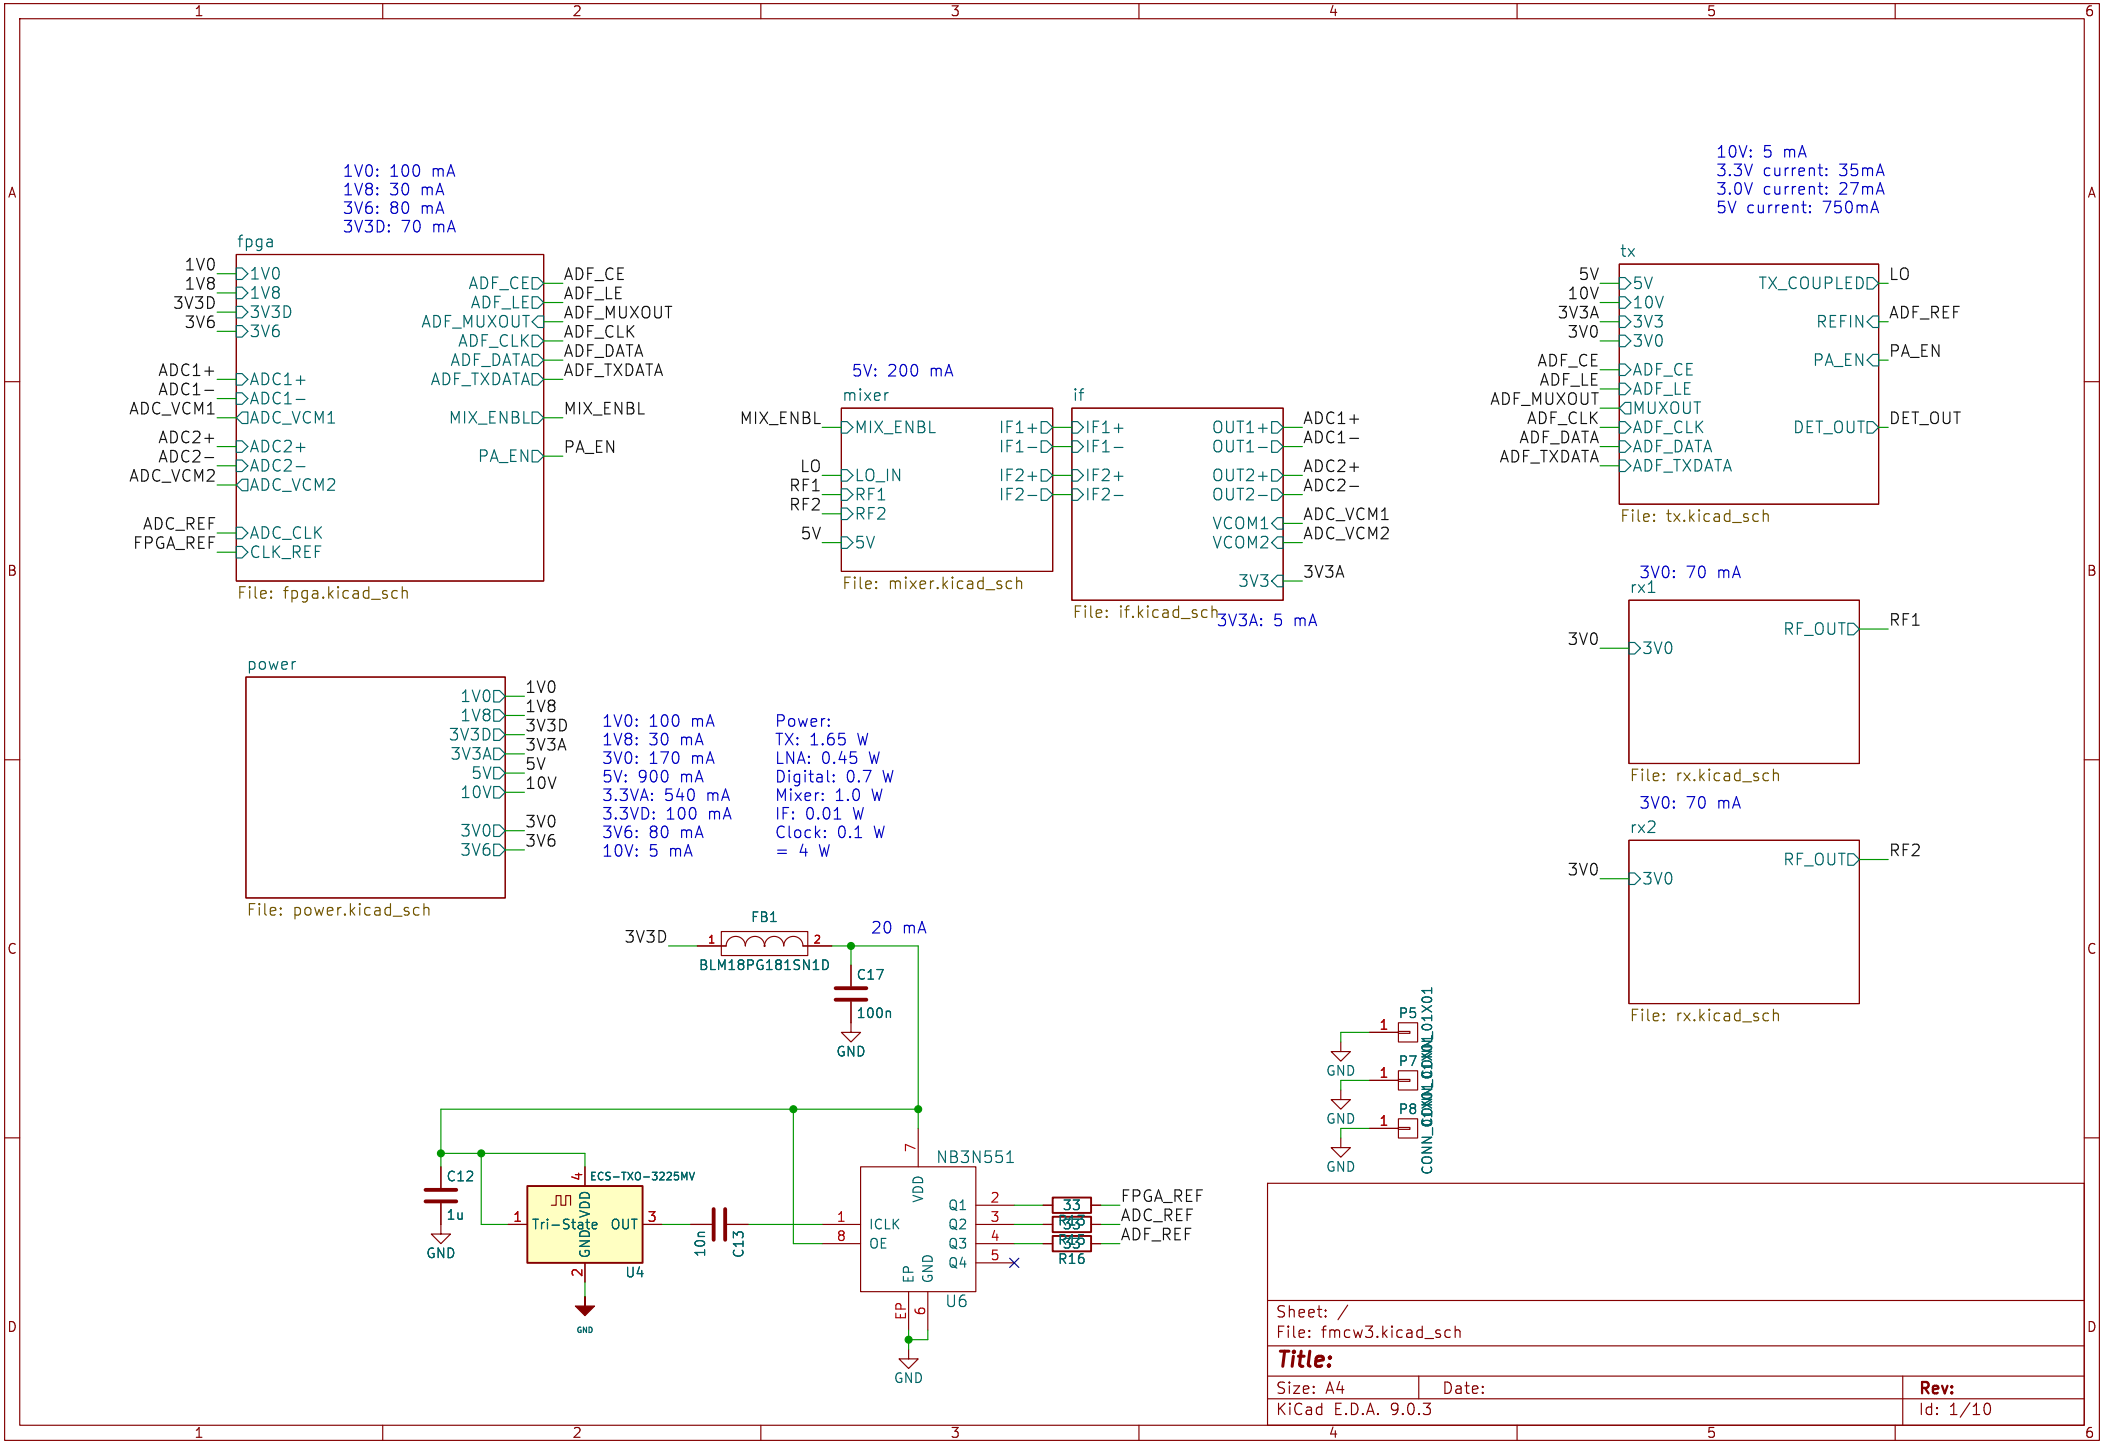





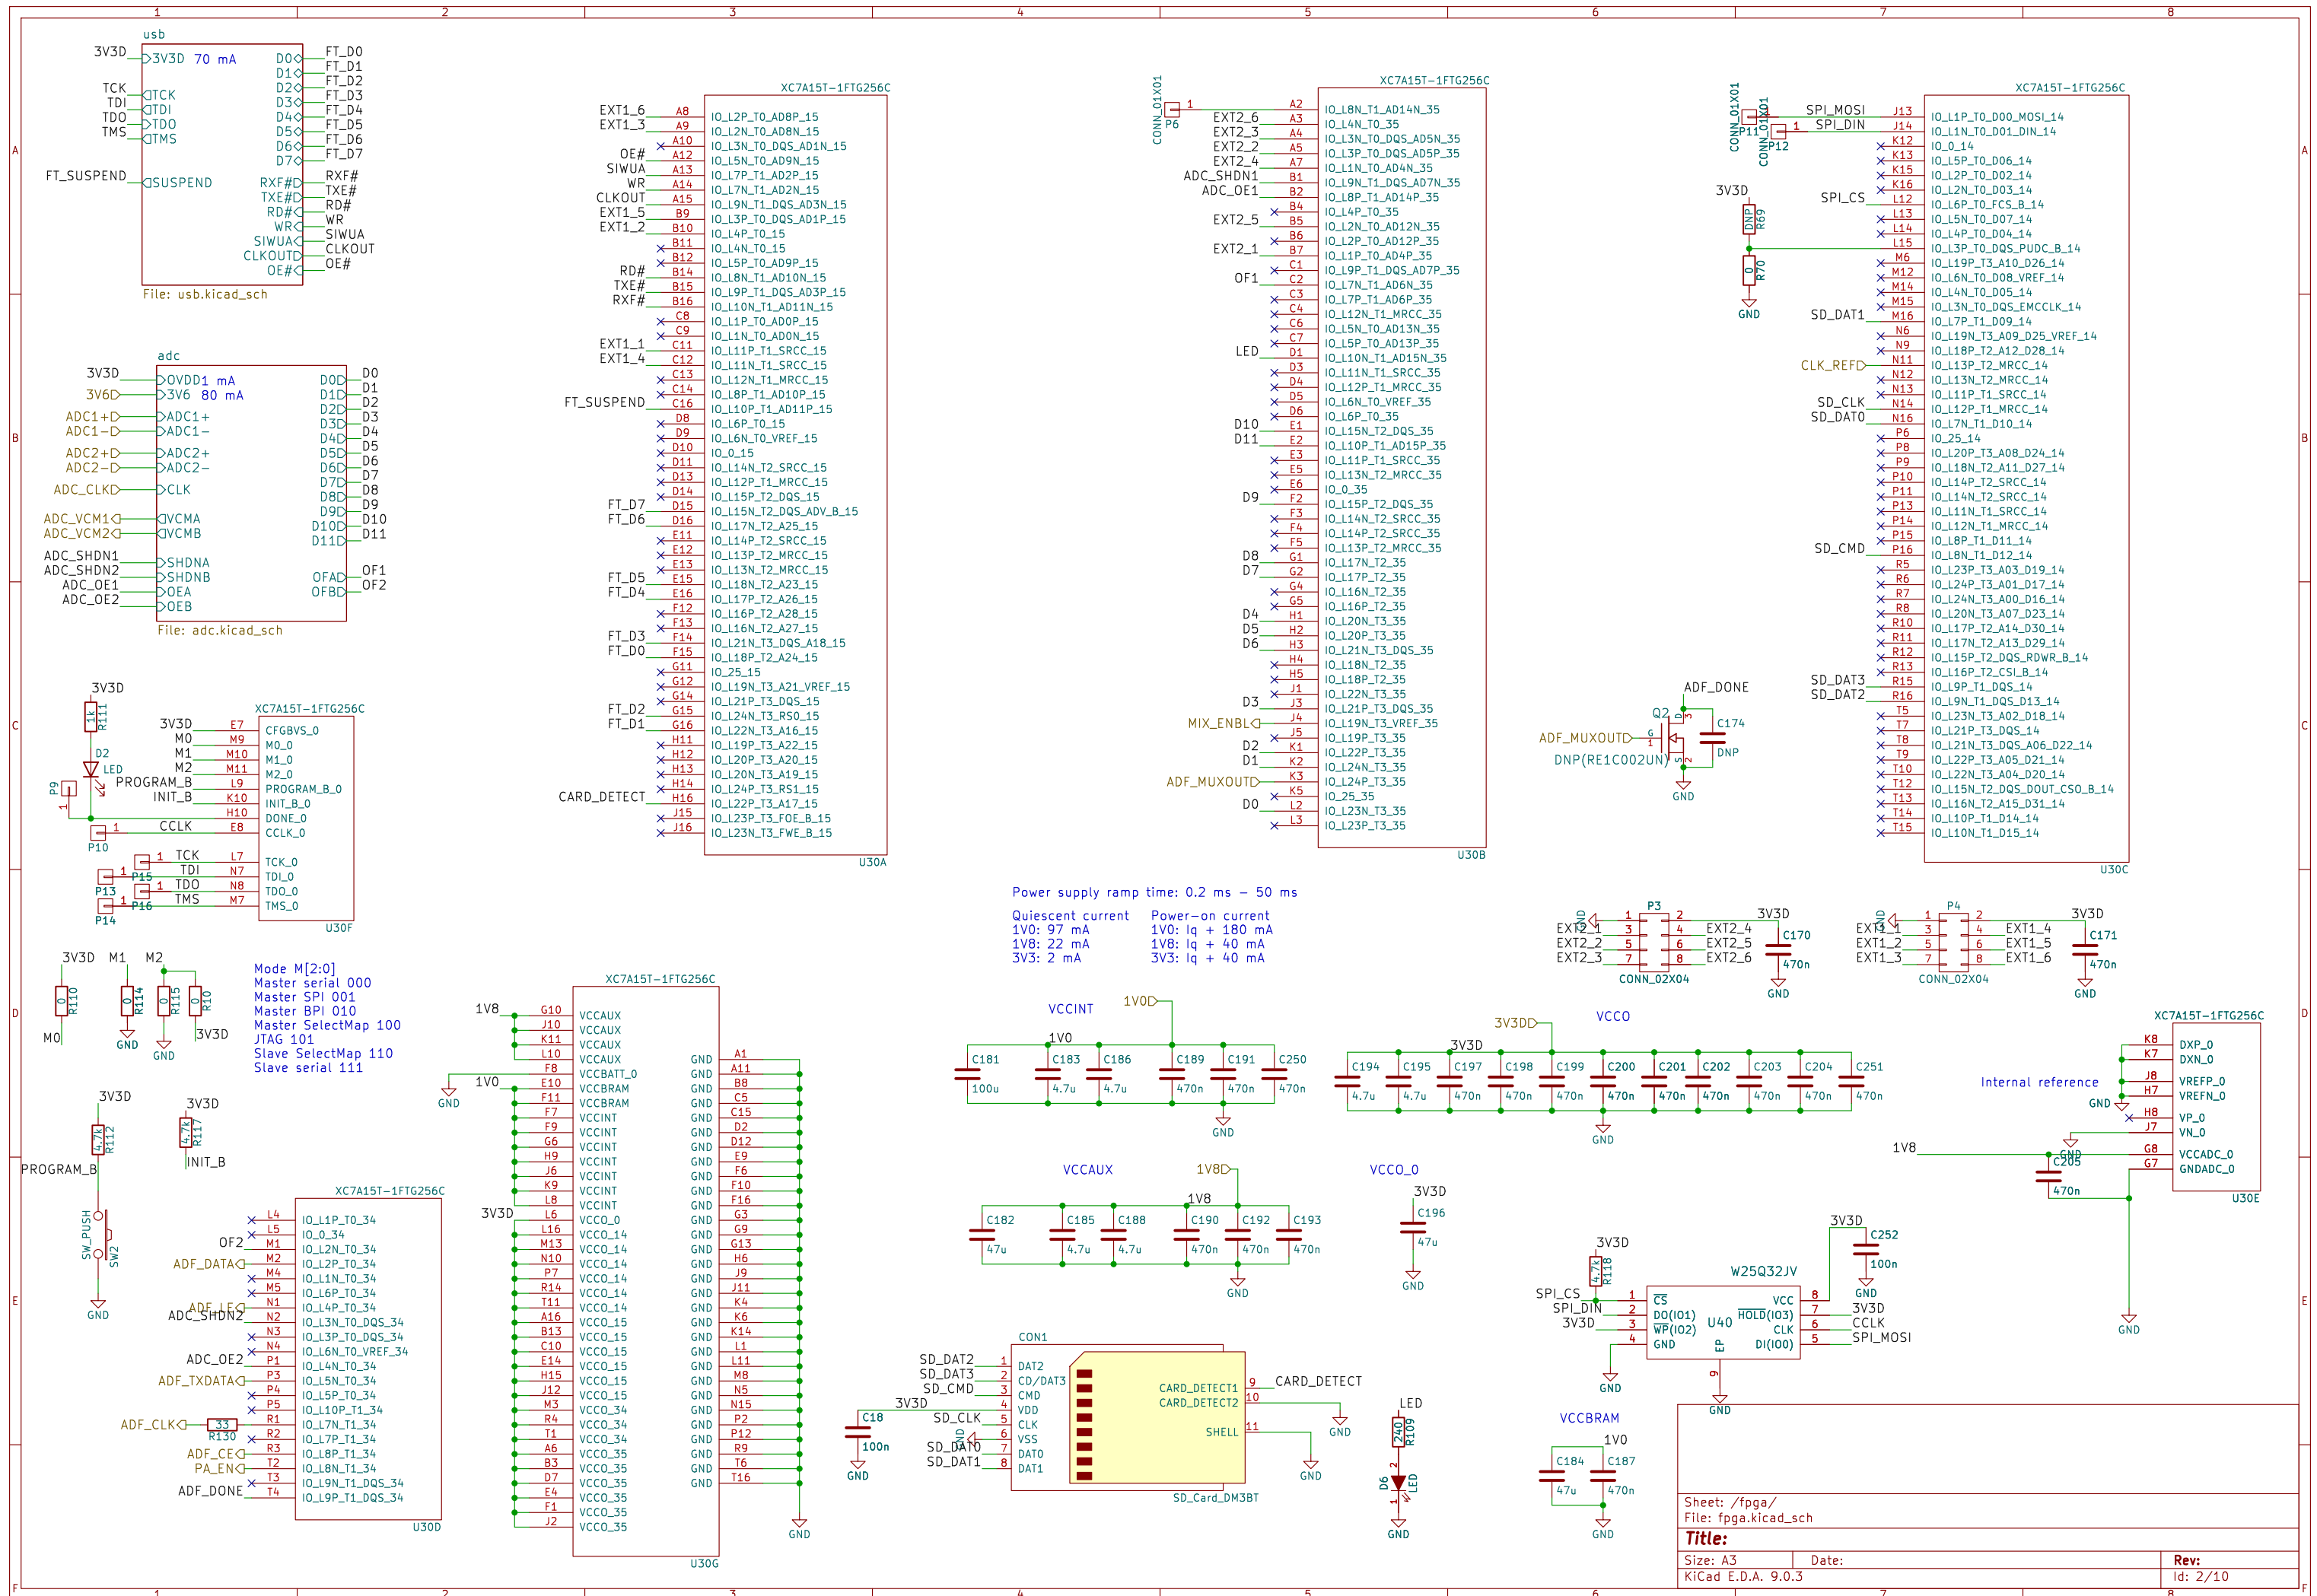


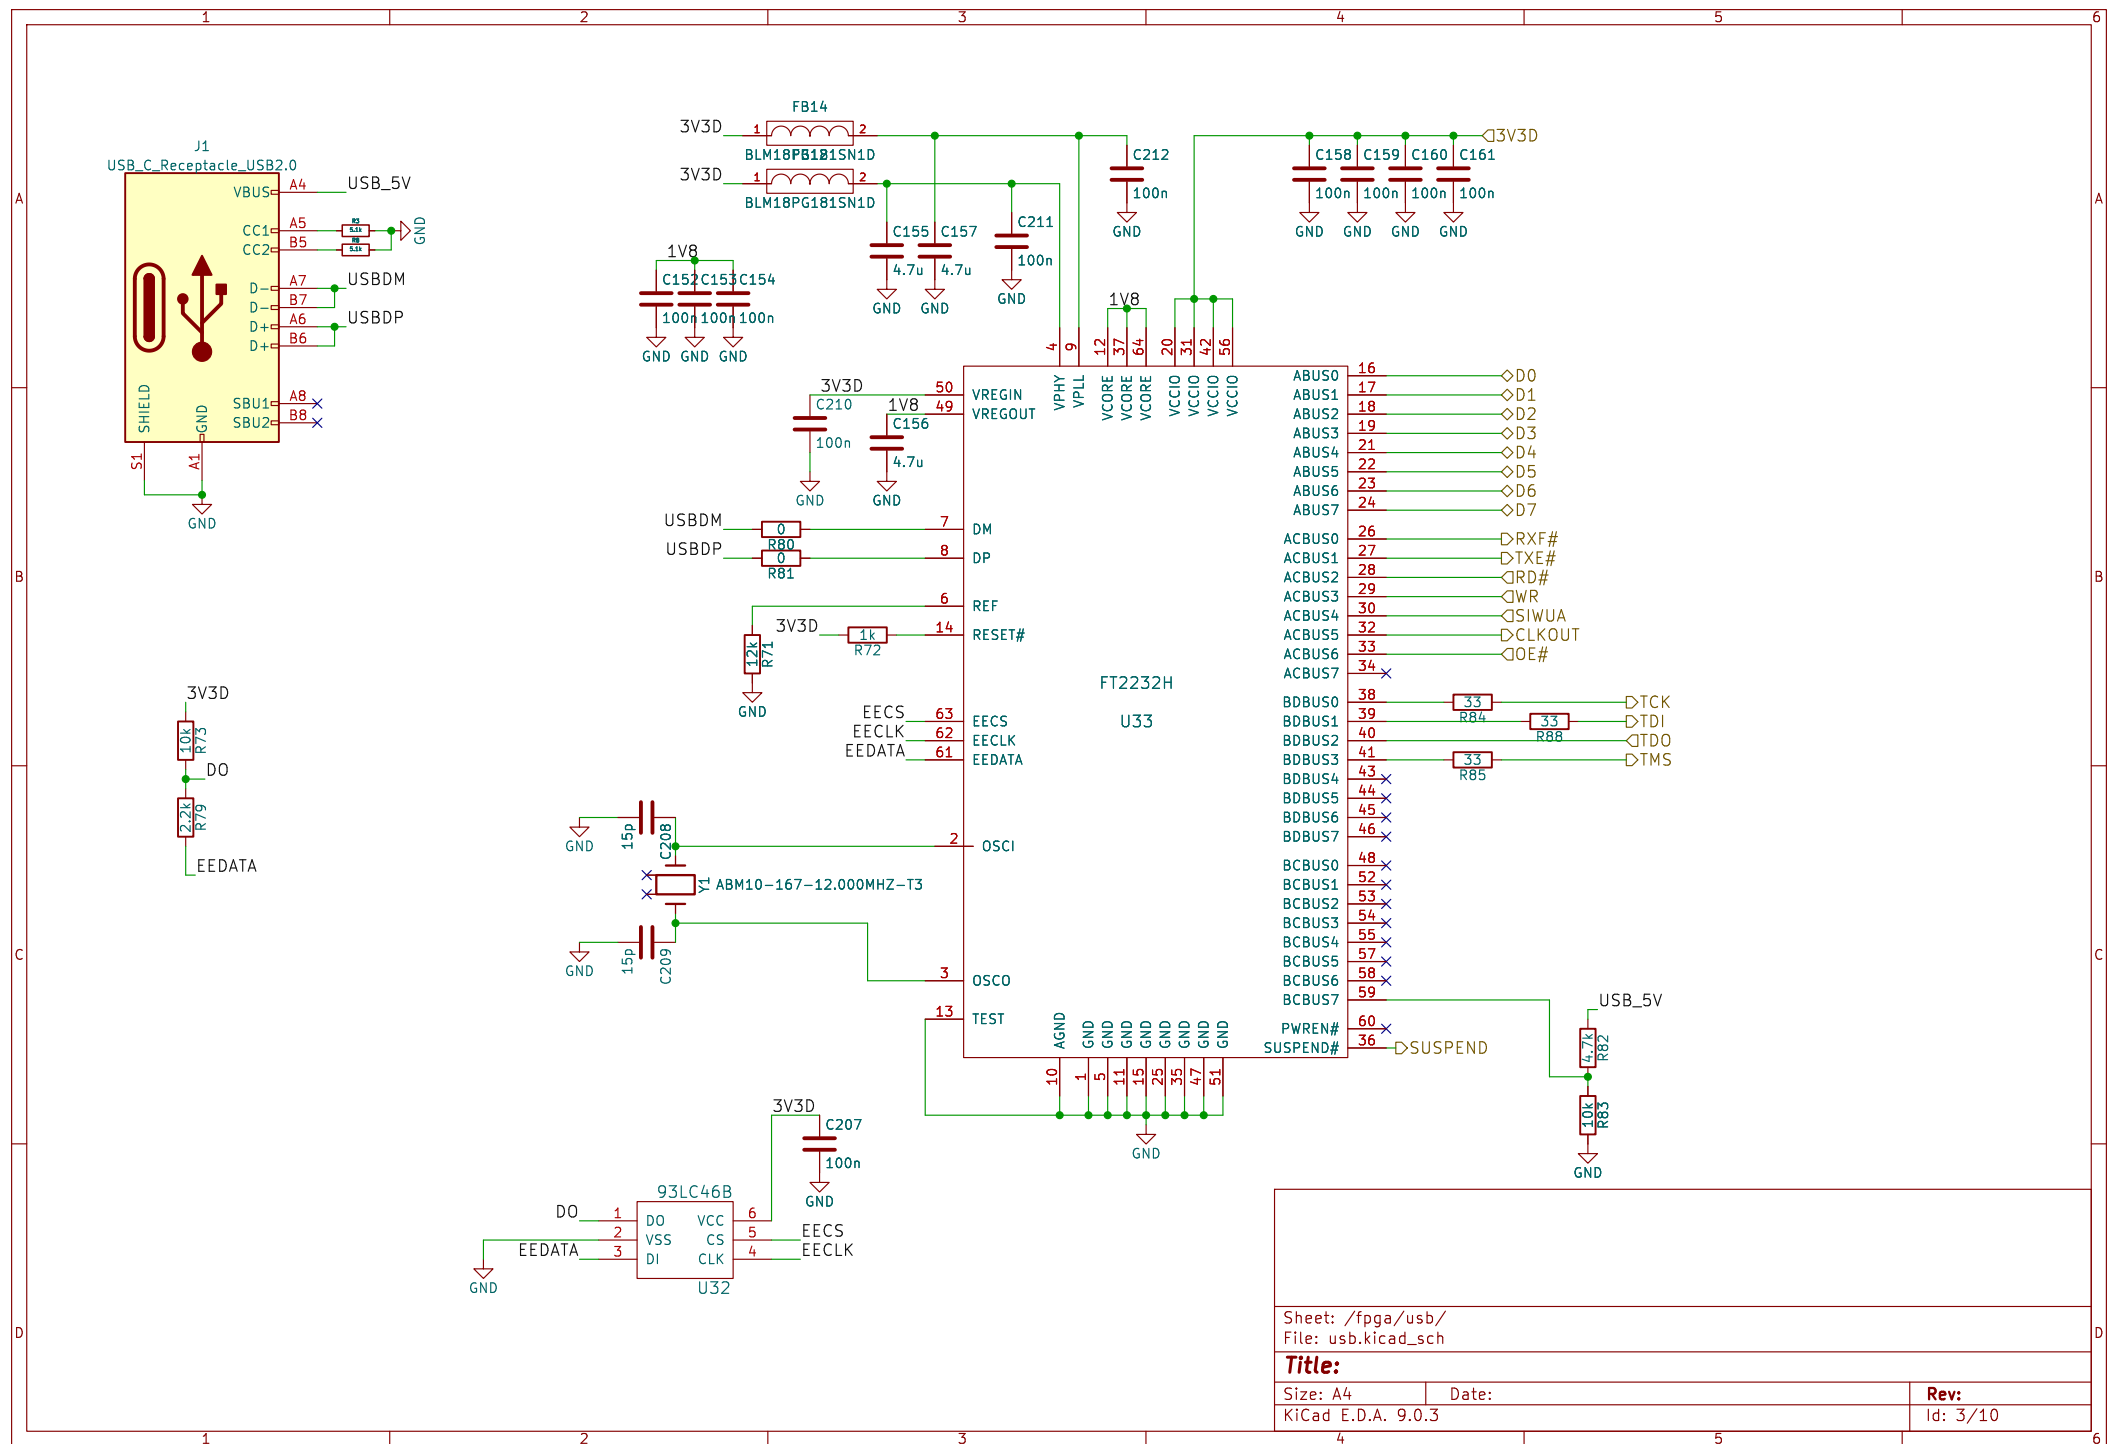

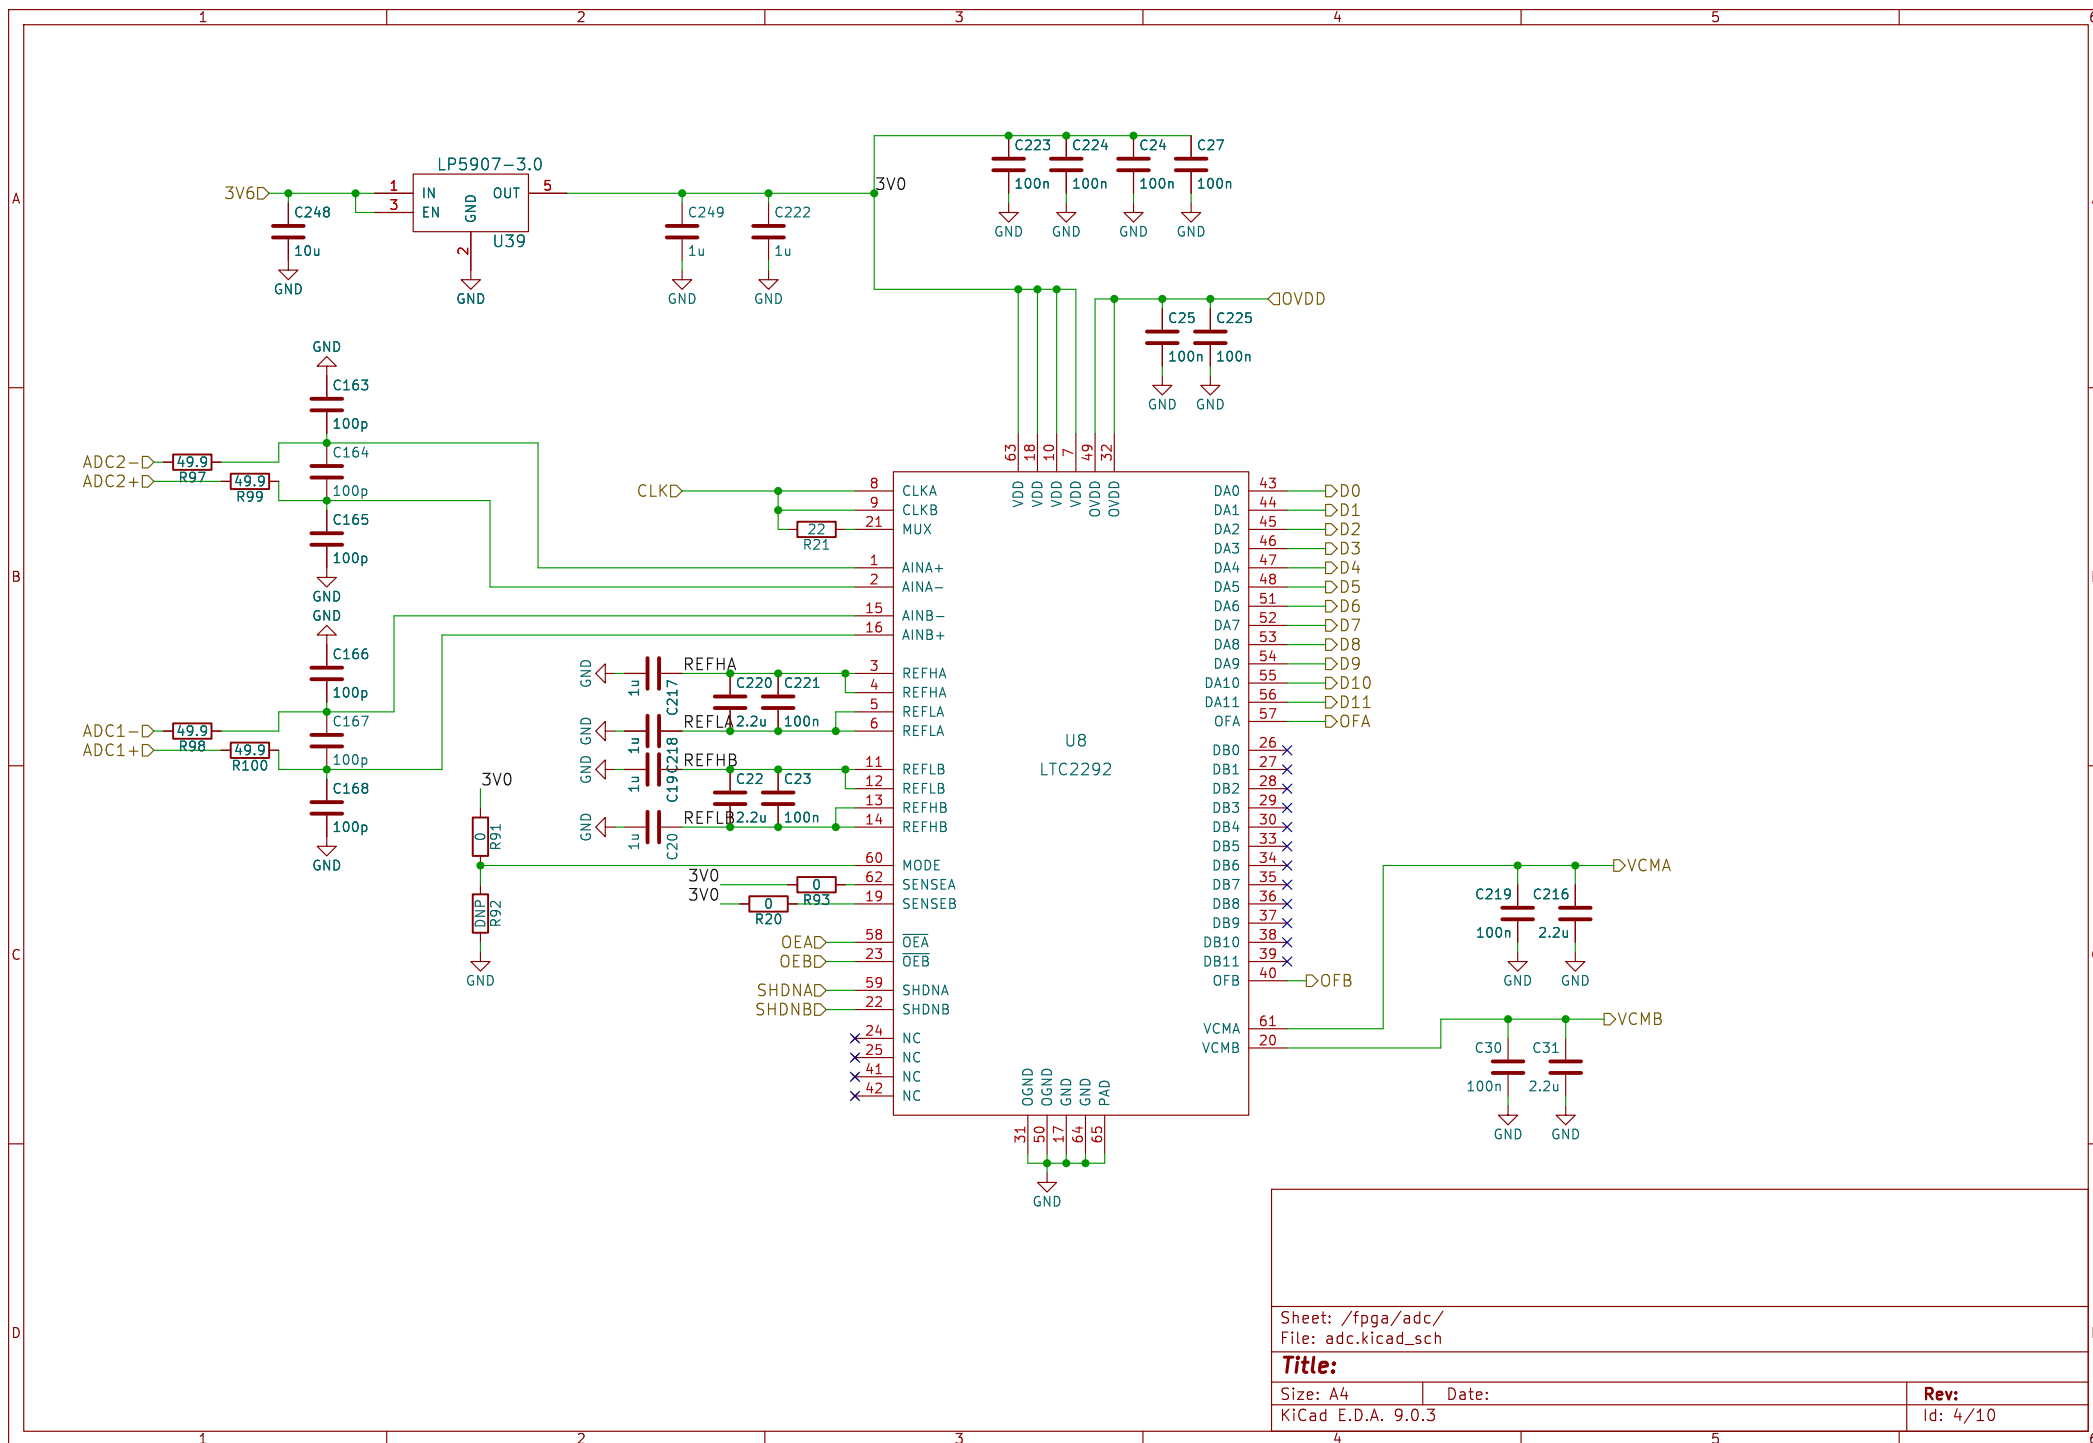


In the Artix-7 data sheet it states that the recommended power-on sequence is VCCINT, VCCBRAM, VCCAUX, and VCCO. 1v0 first 1v8 then 3v3 is the sequence so use power good

2A buck converter

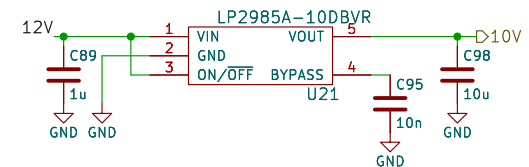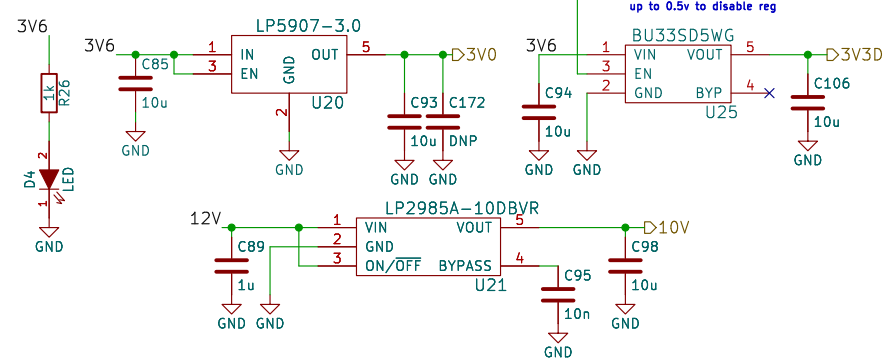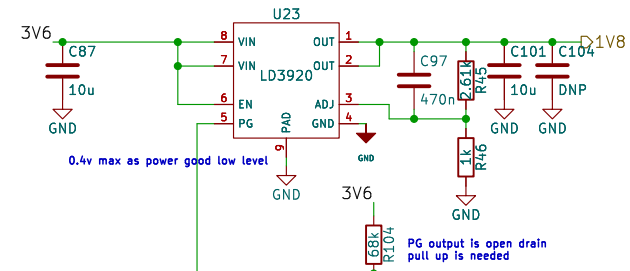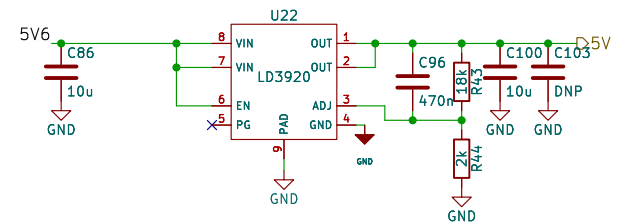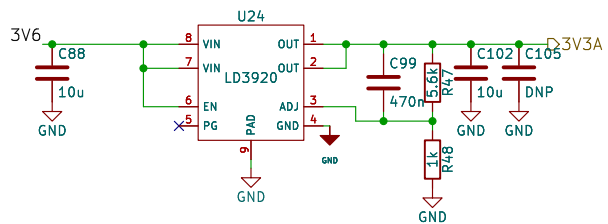



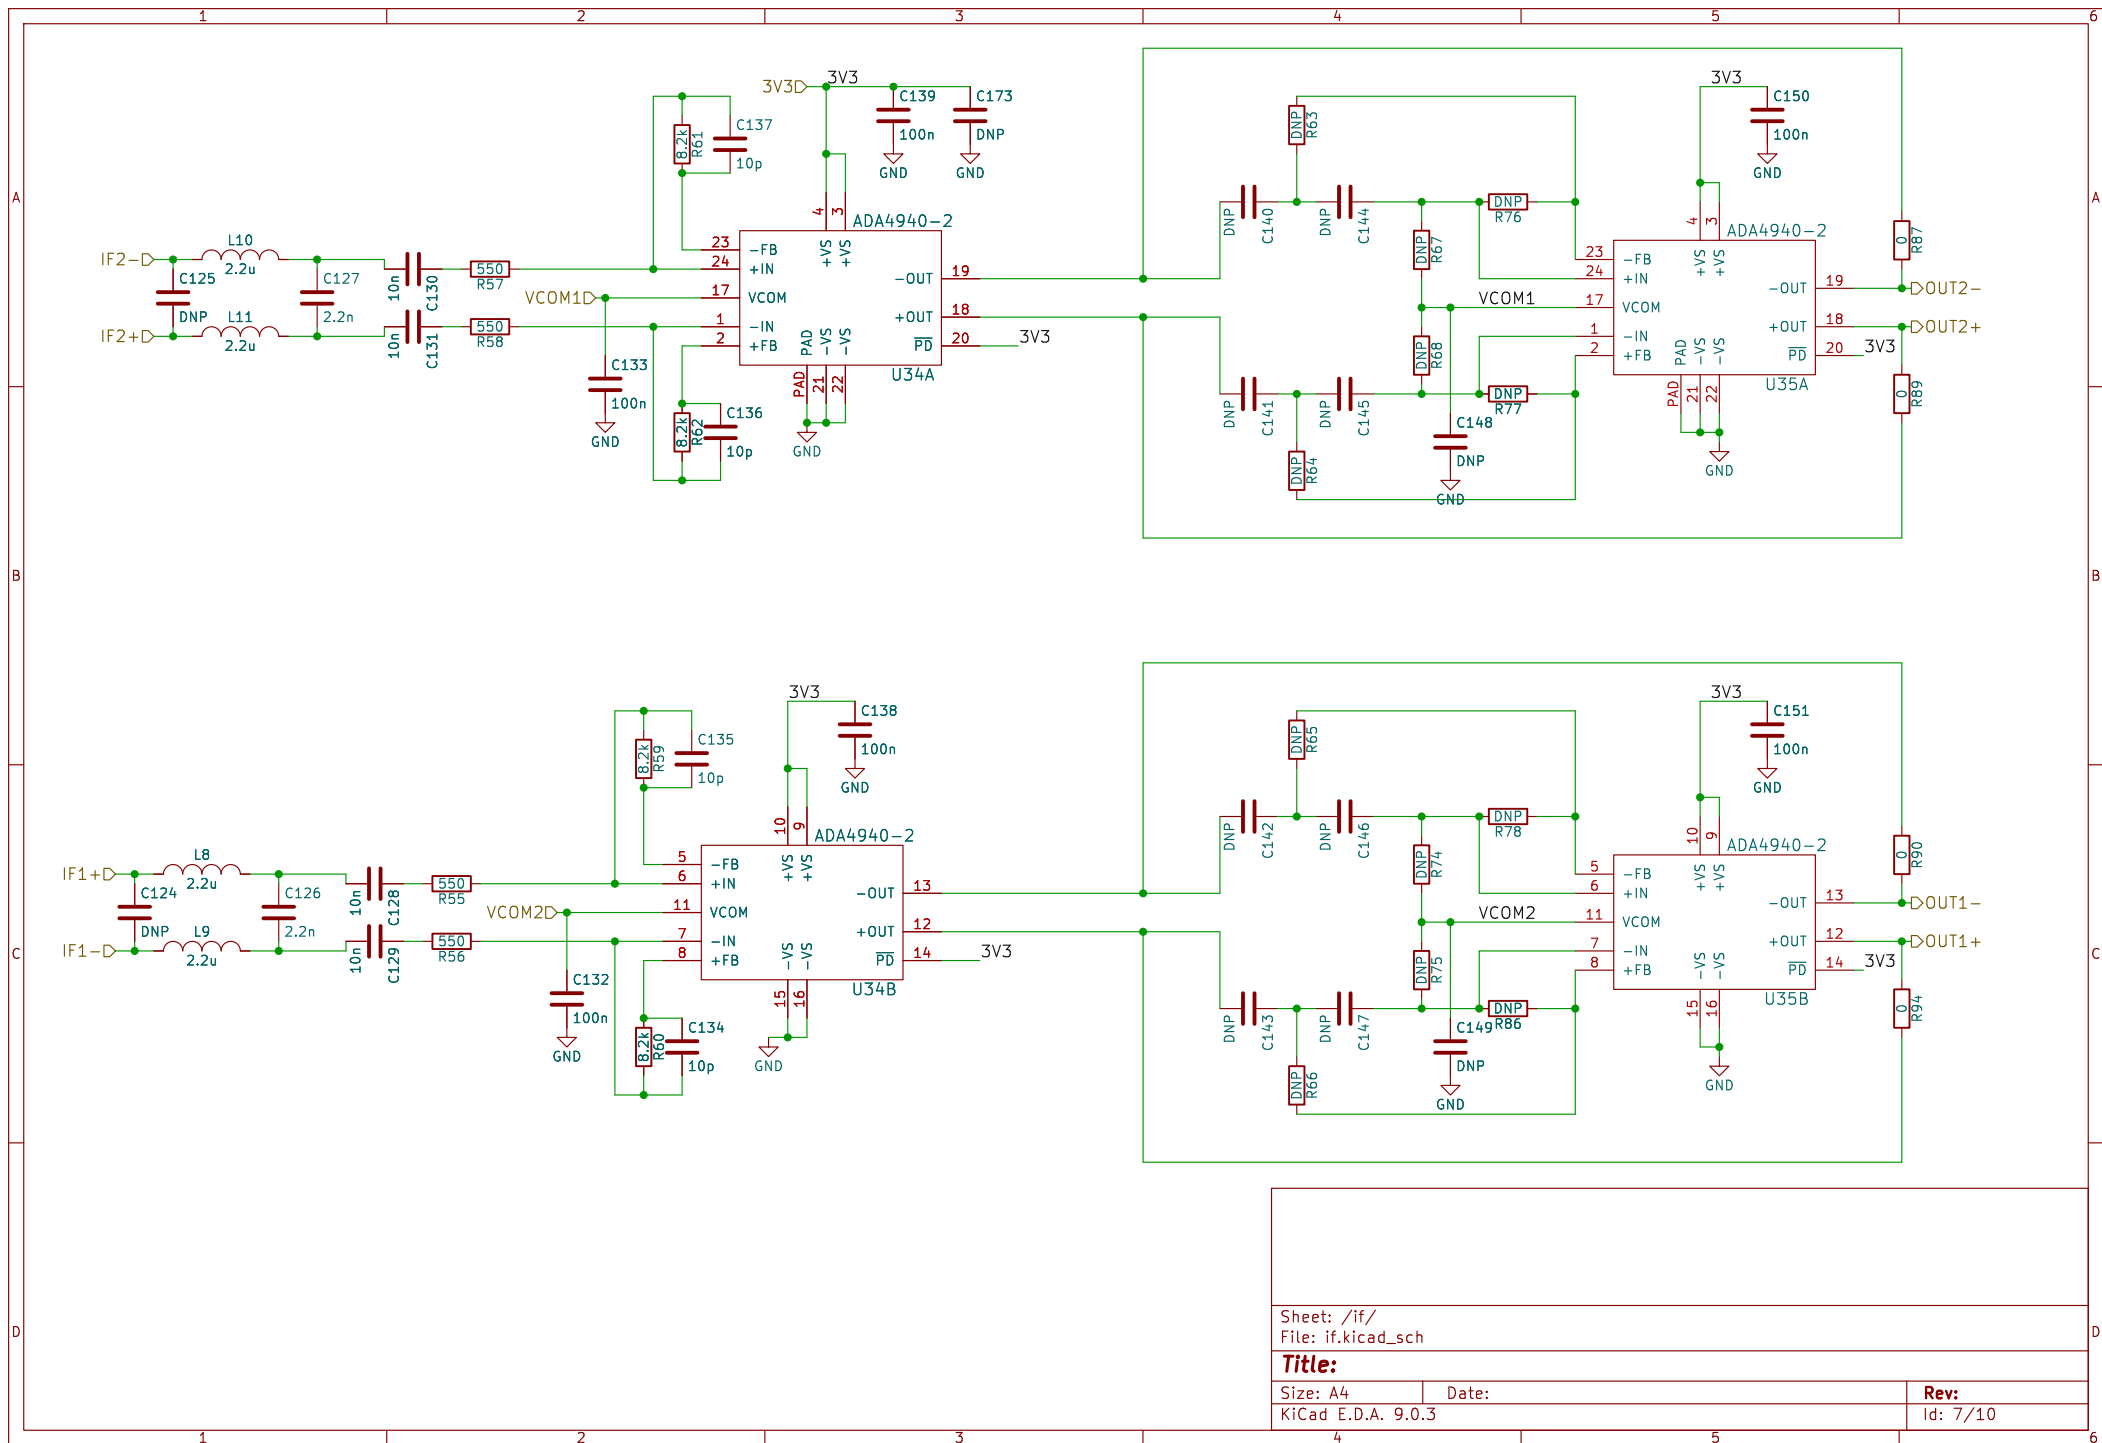


Sheet: /if/
File: if.kicad_sch


Title:

Size: A4
KiCad E.D.A. 9.0.3

Date:

Rev:
Id: 7/10

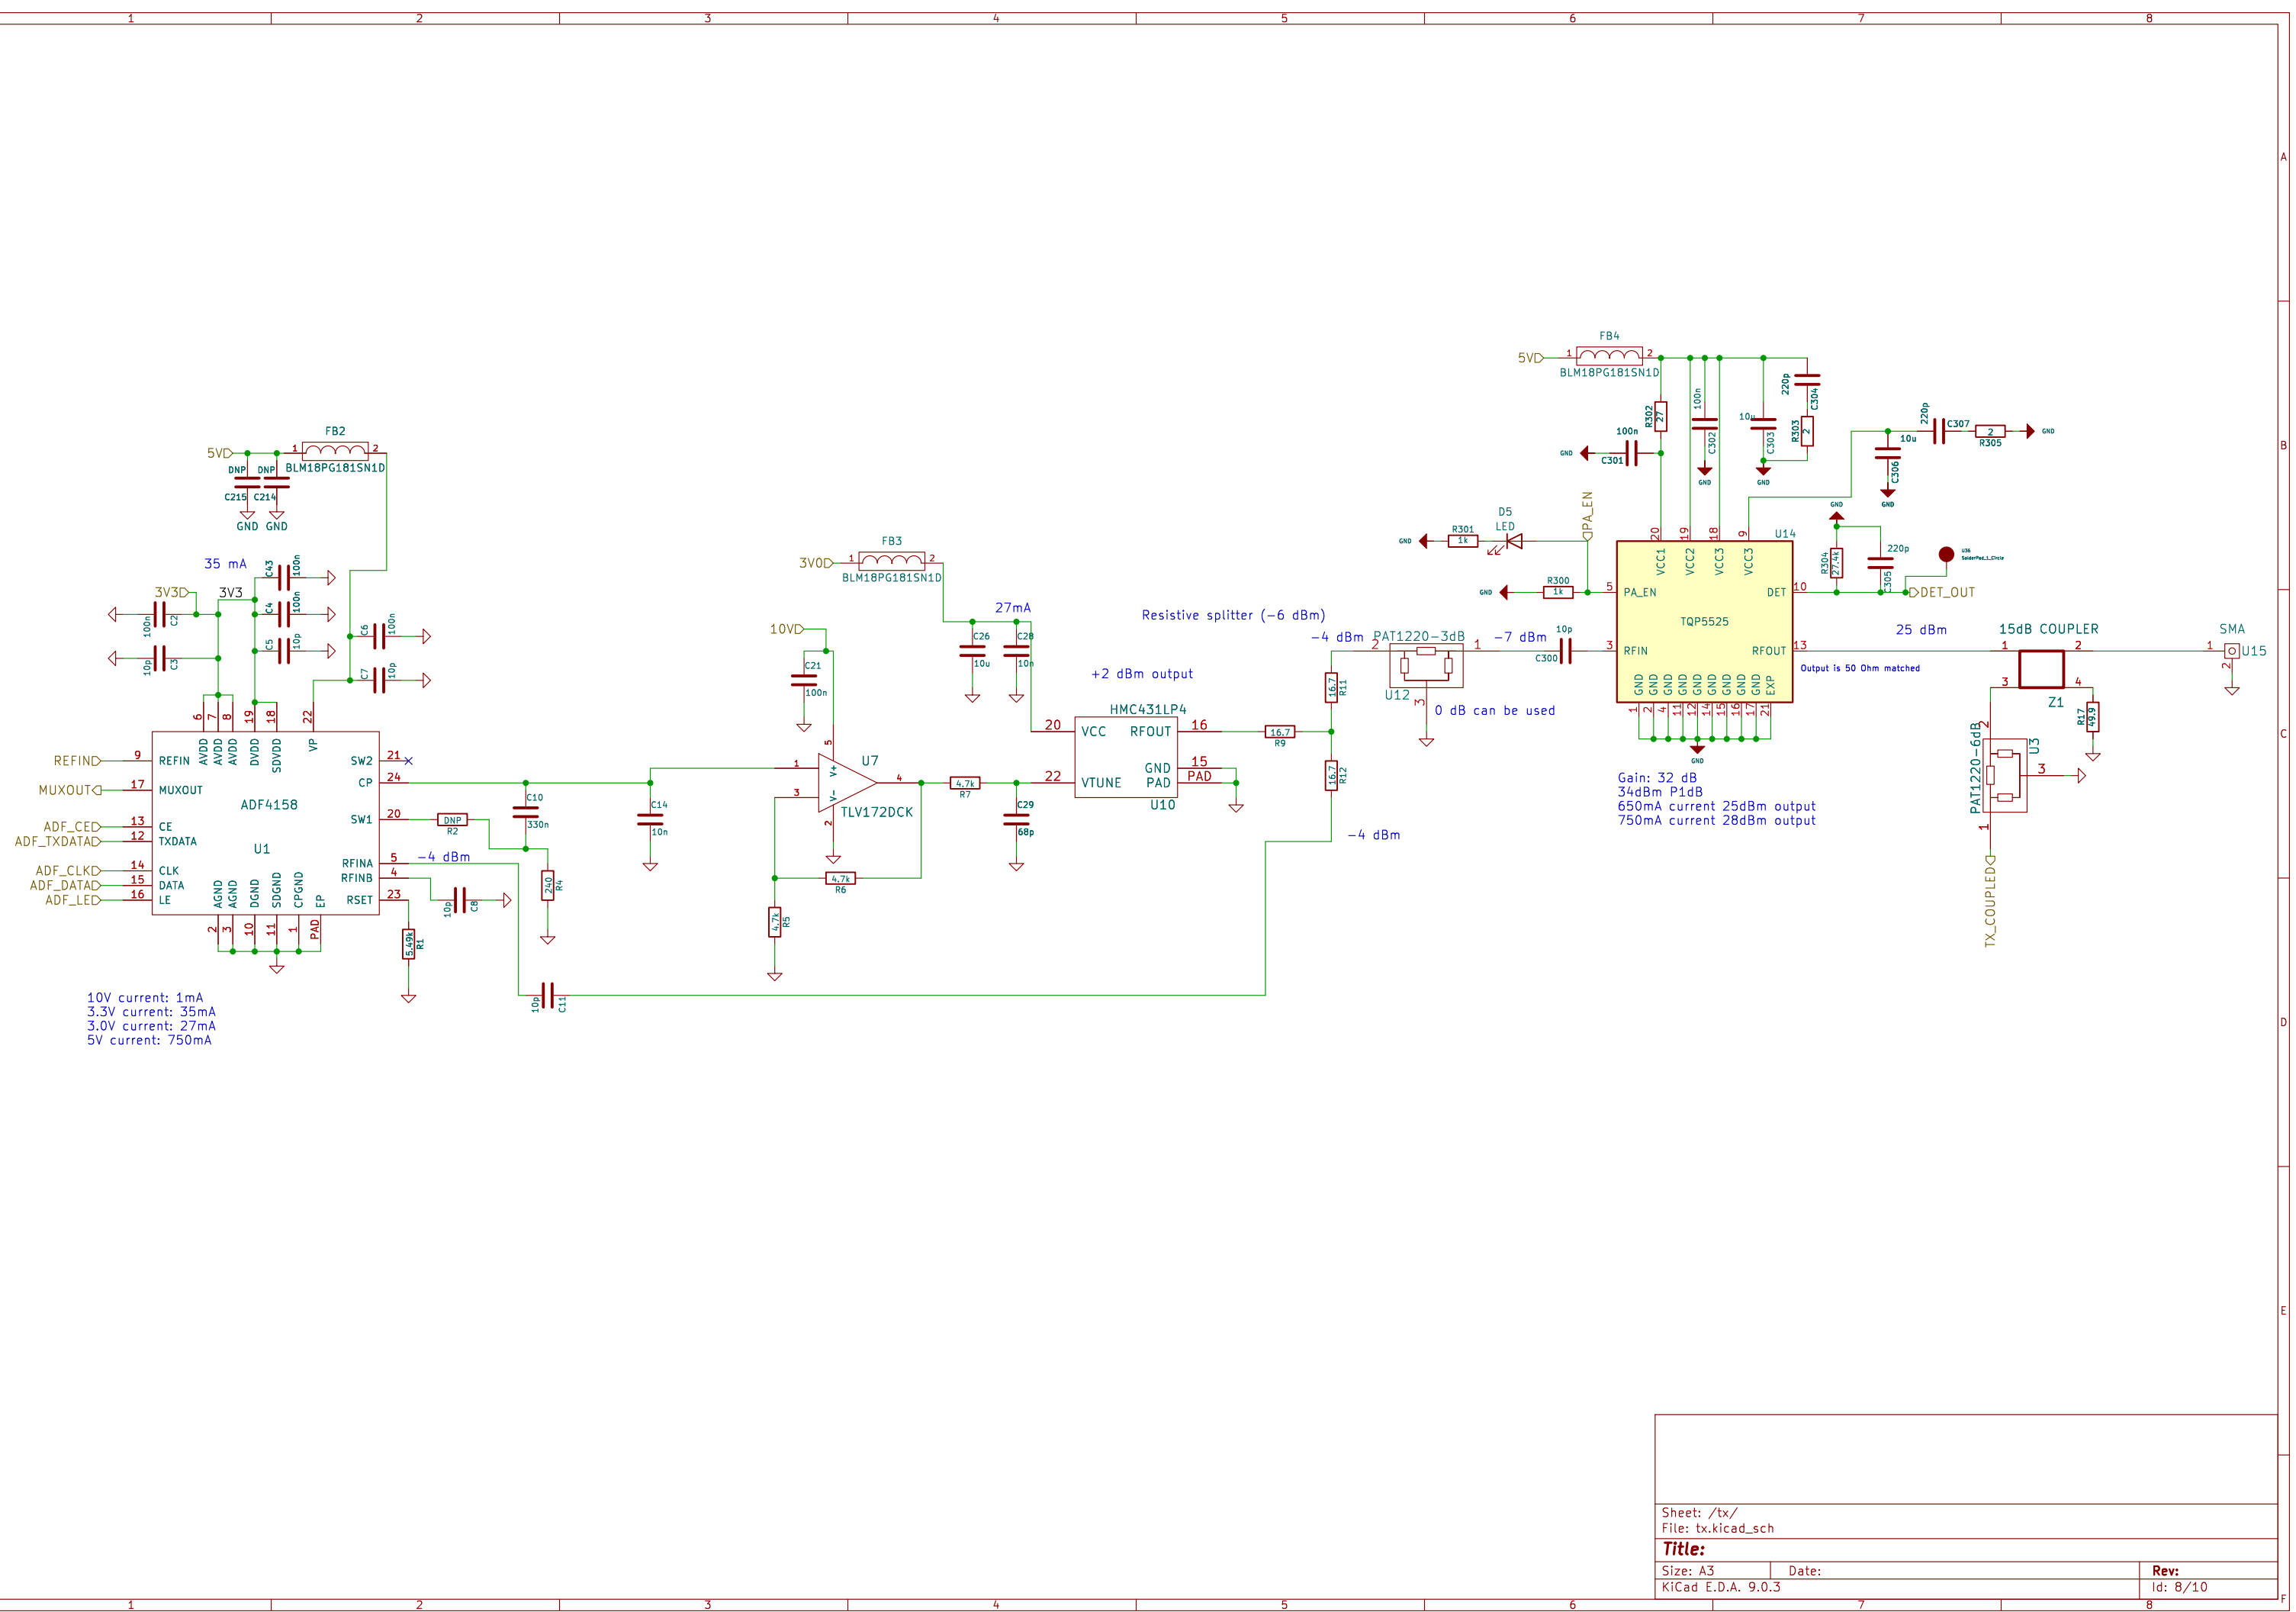

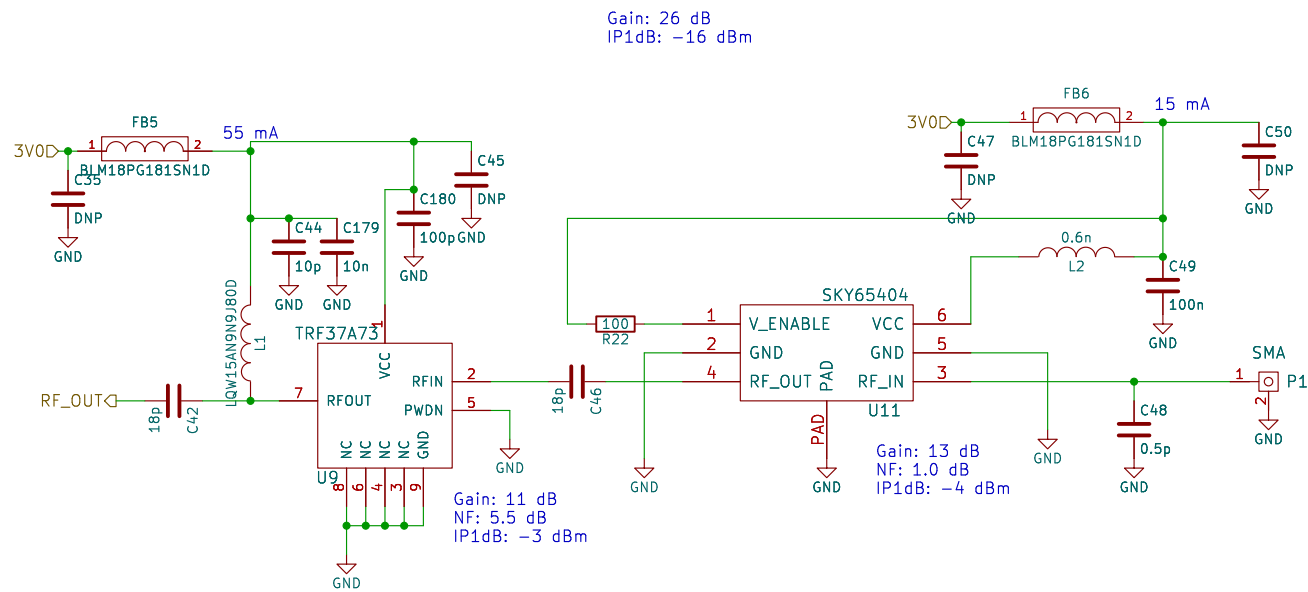


Sheet: /rx1/
File: rx.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.3

Date:

Rev:
Id: 9/10

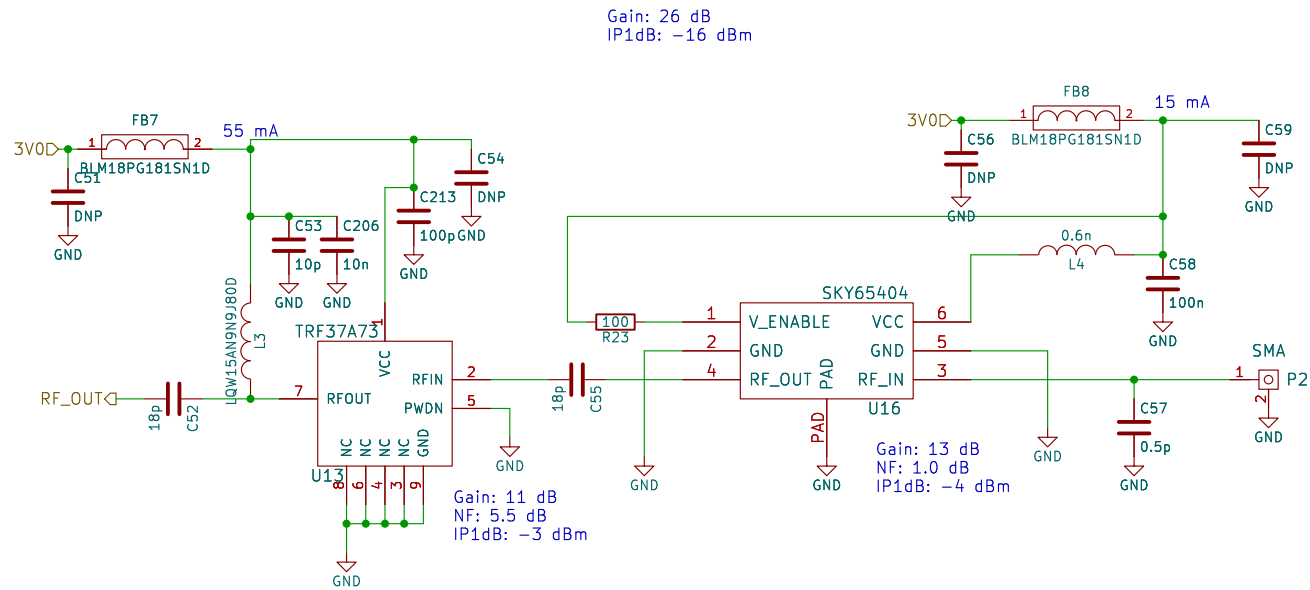

Sheet: /rx2/
File: rx.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.3

Date:

Rev:
Id: 10/10