





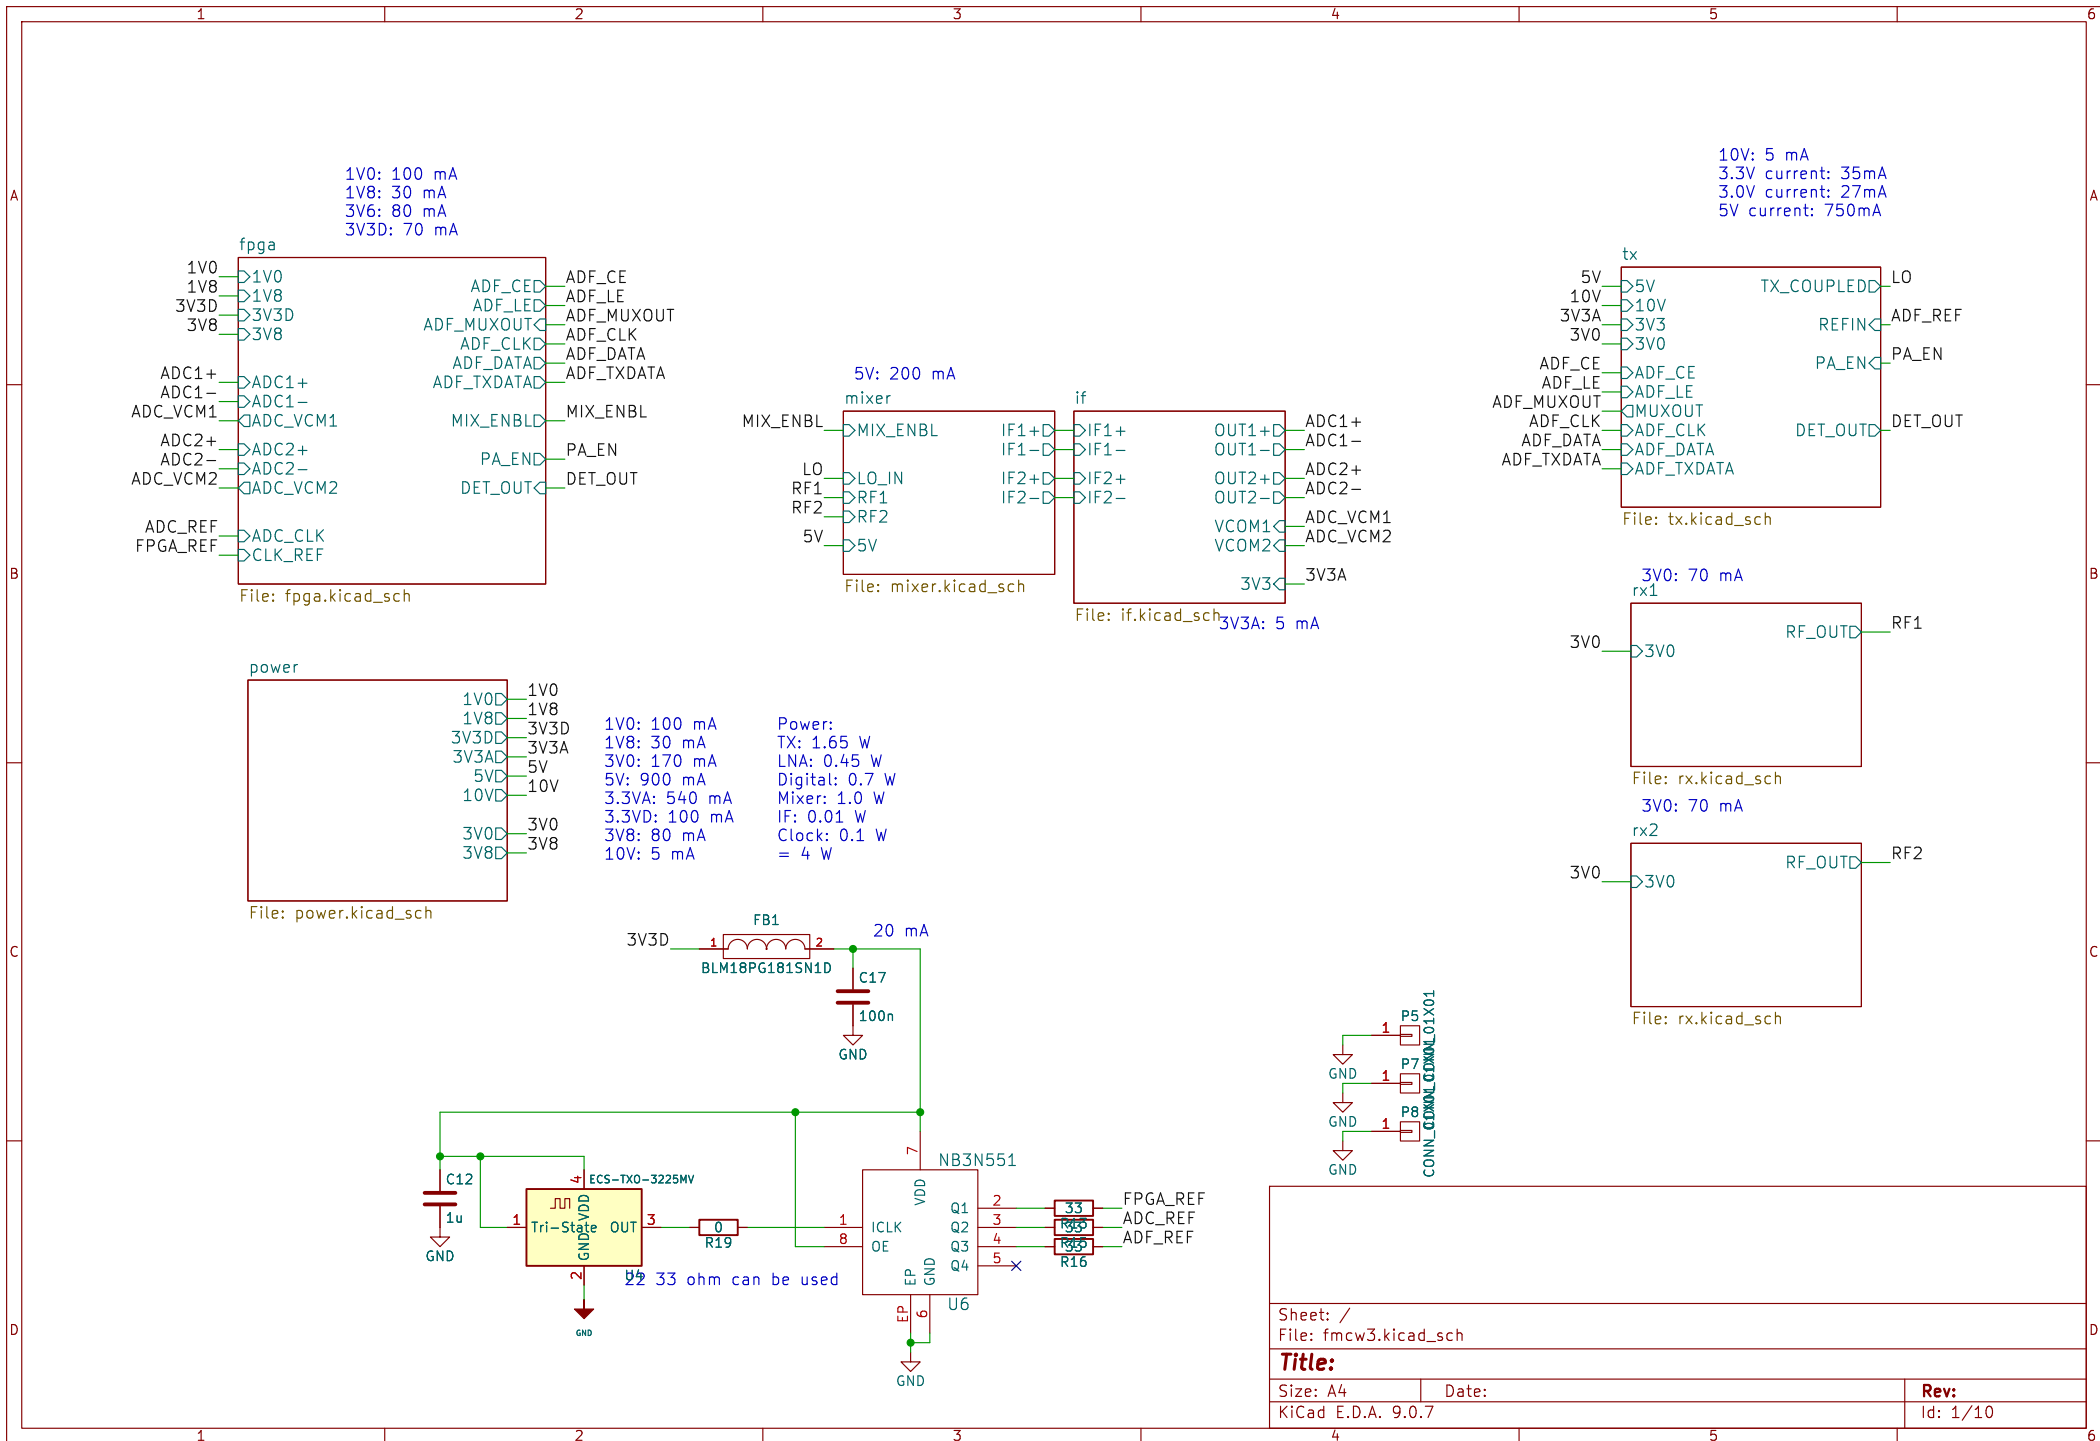

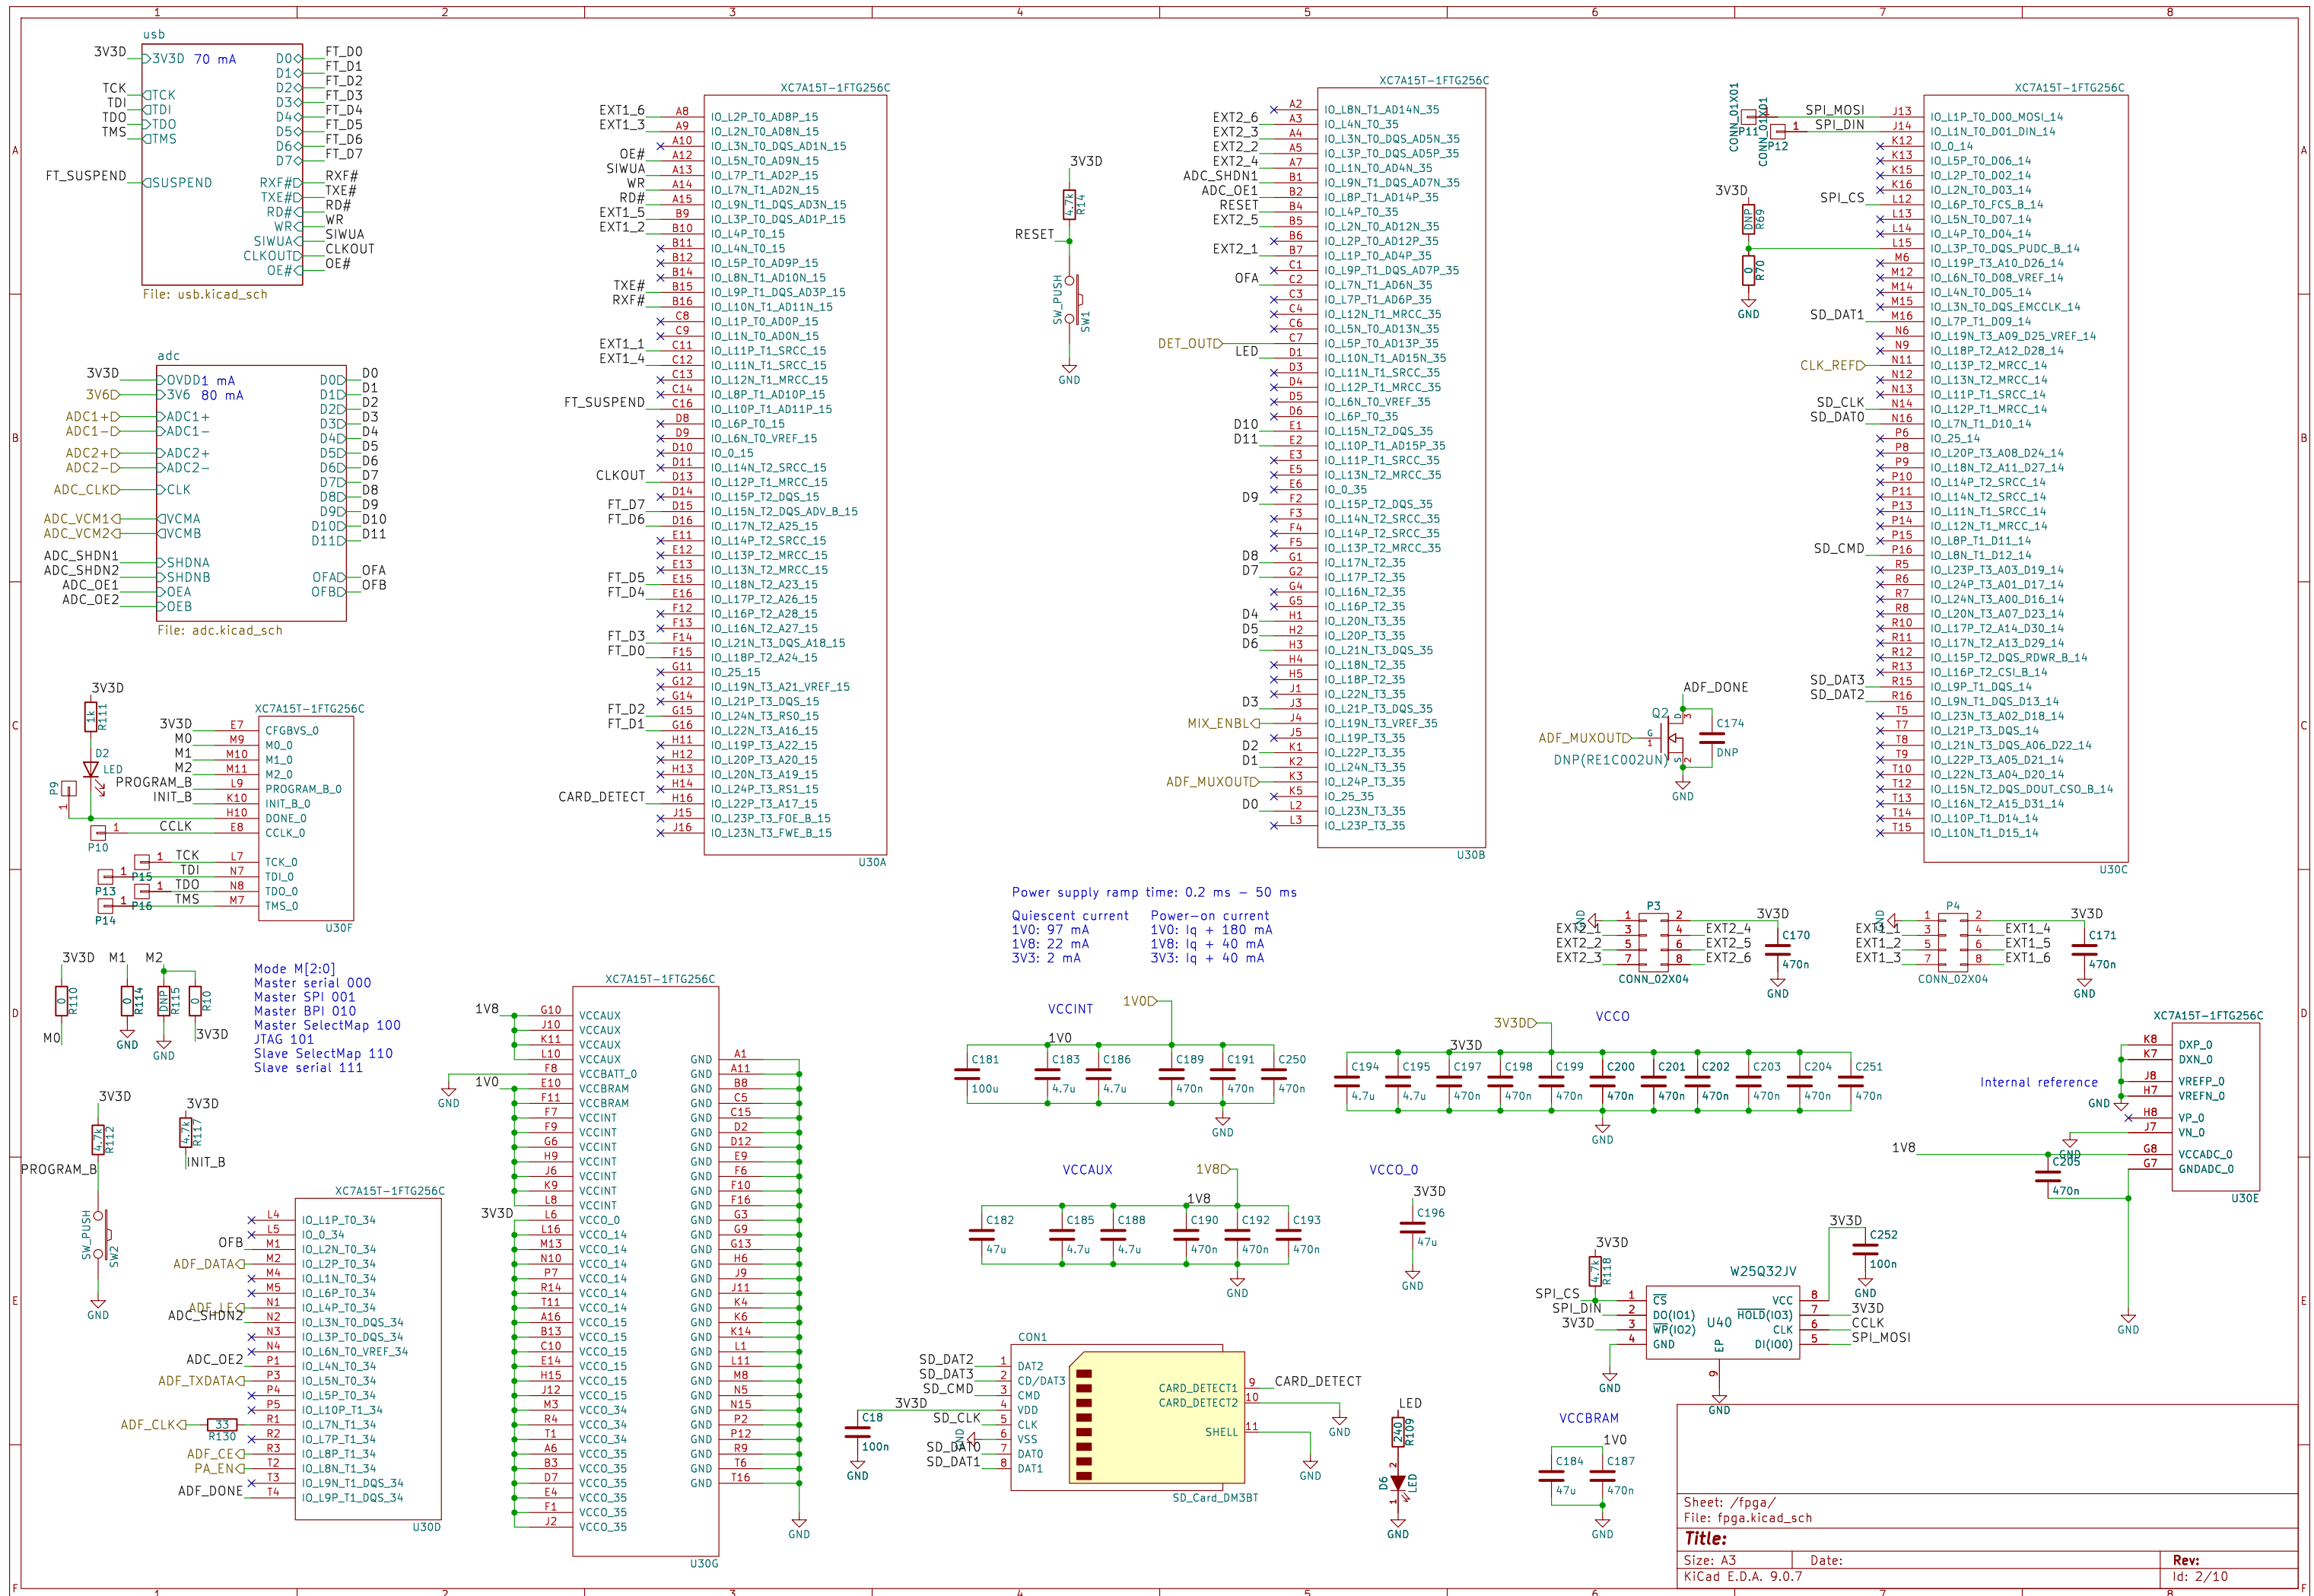

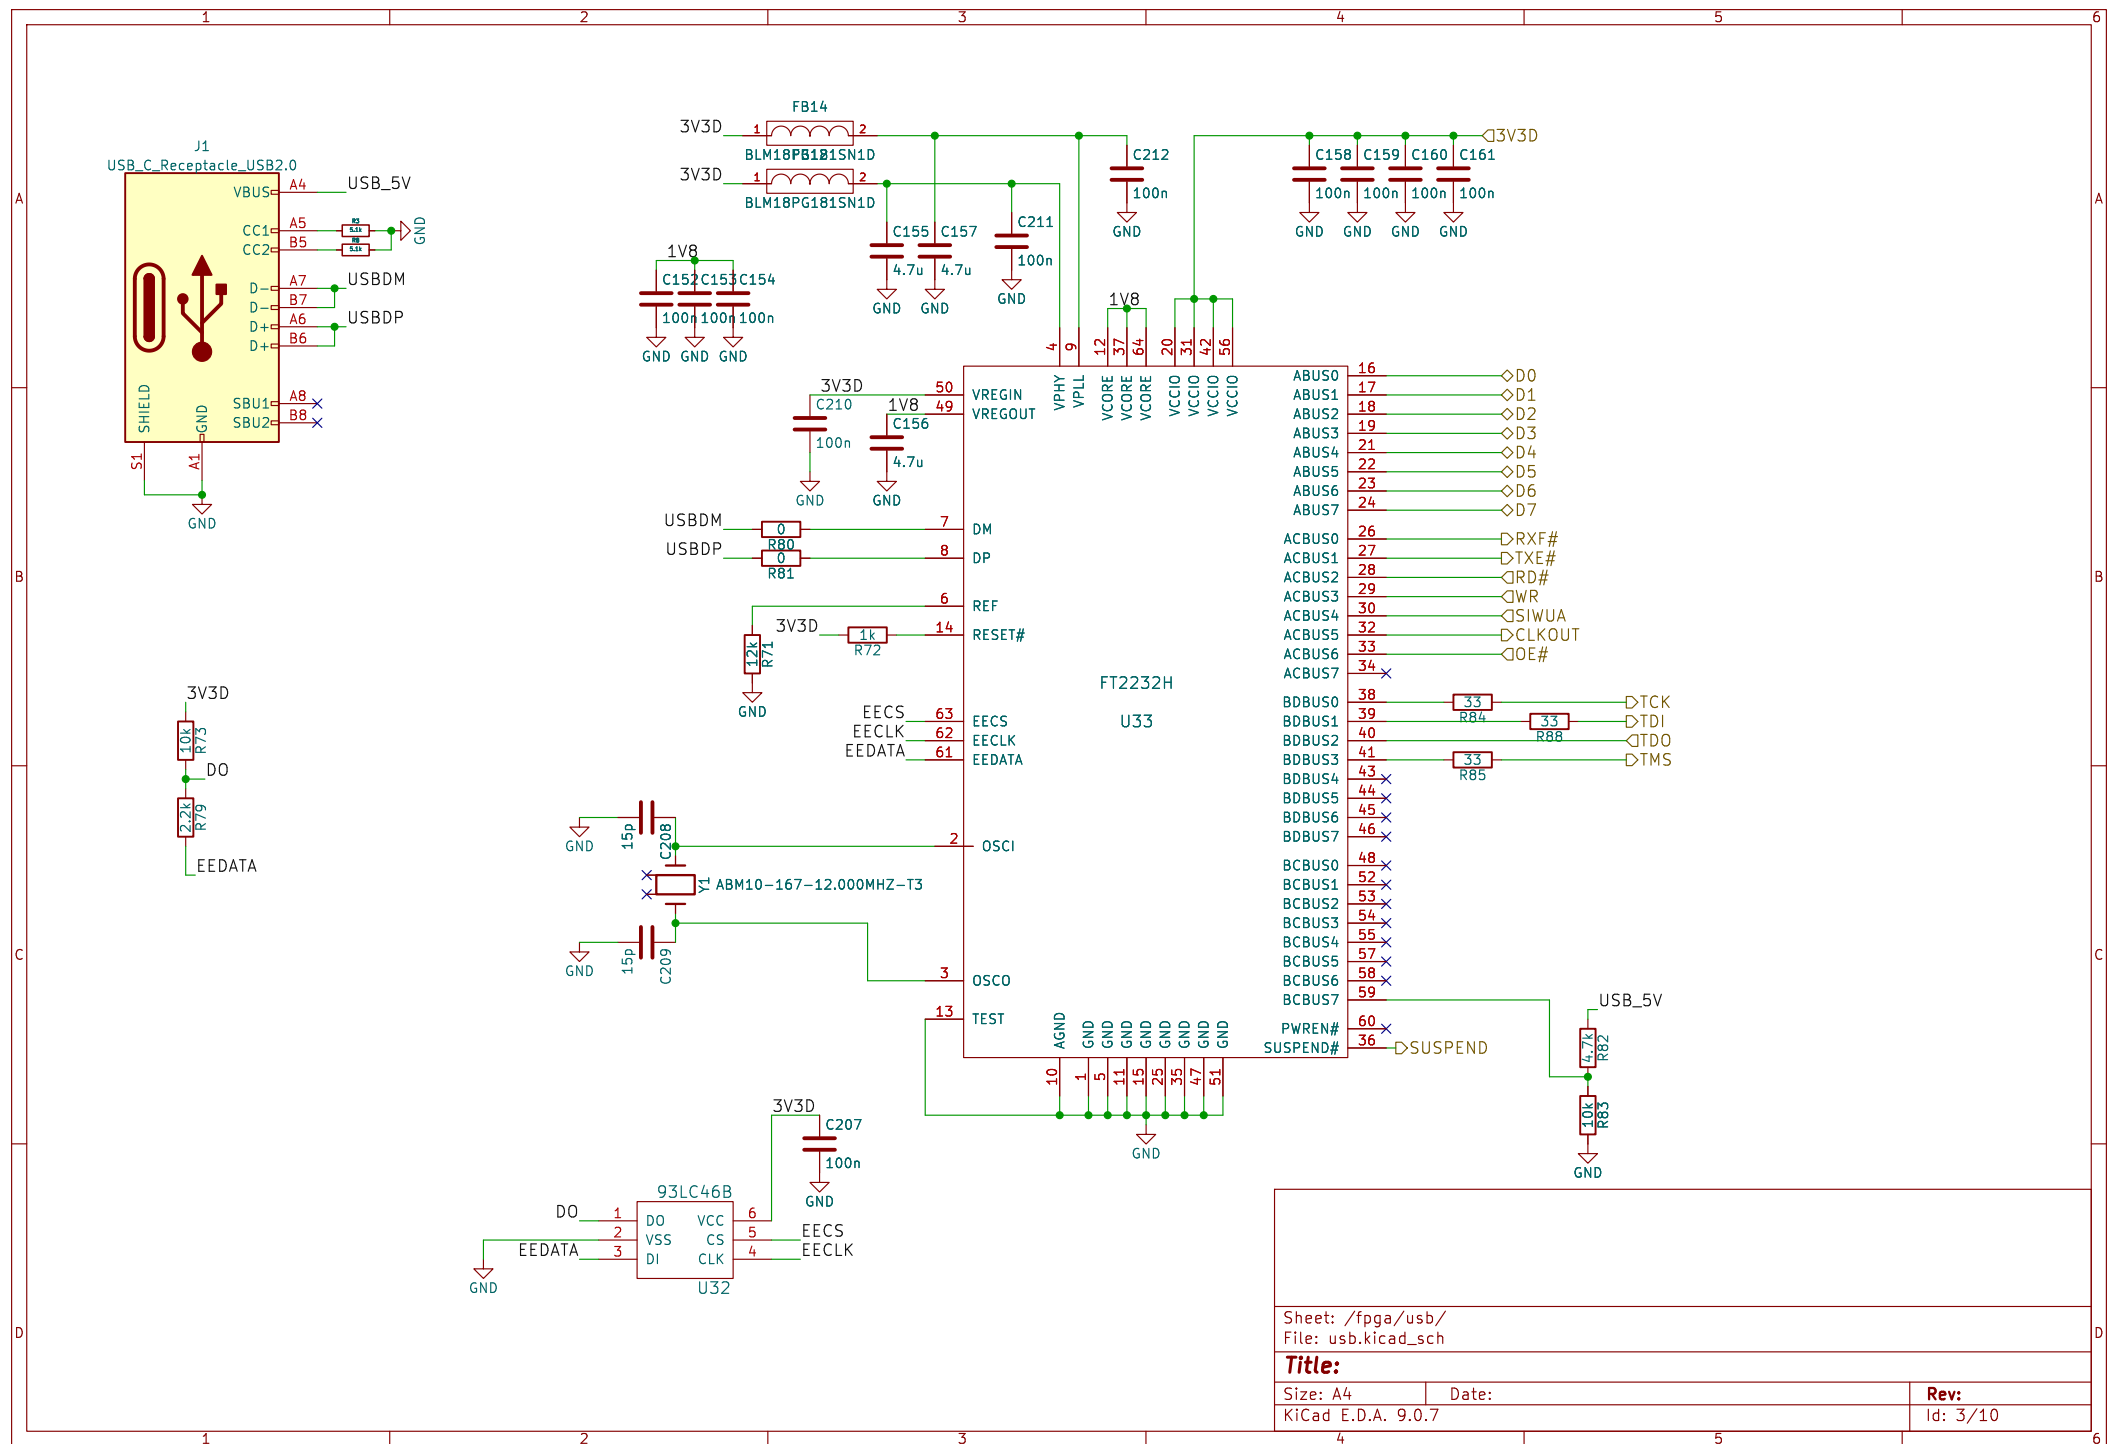


In the Artix-7 data sheet it states that the recommended power-on sequence is VCCINT, VCCBRAM, VCCAUX, and VCCO. 1v0 first 1v8 then 3v3 is the sequence so use power good

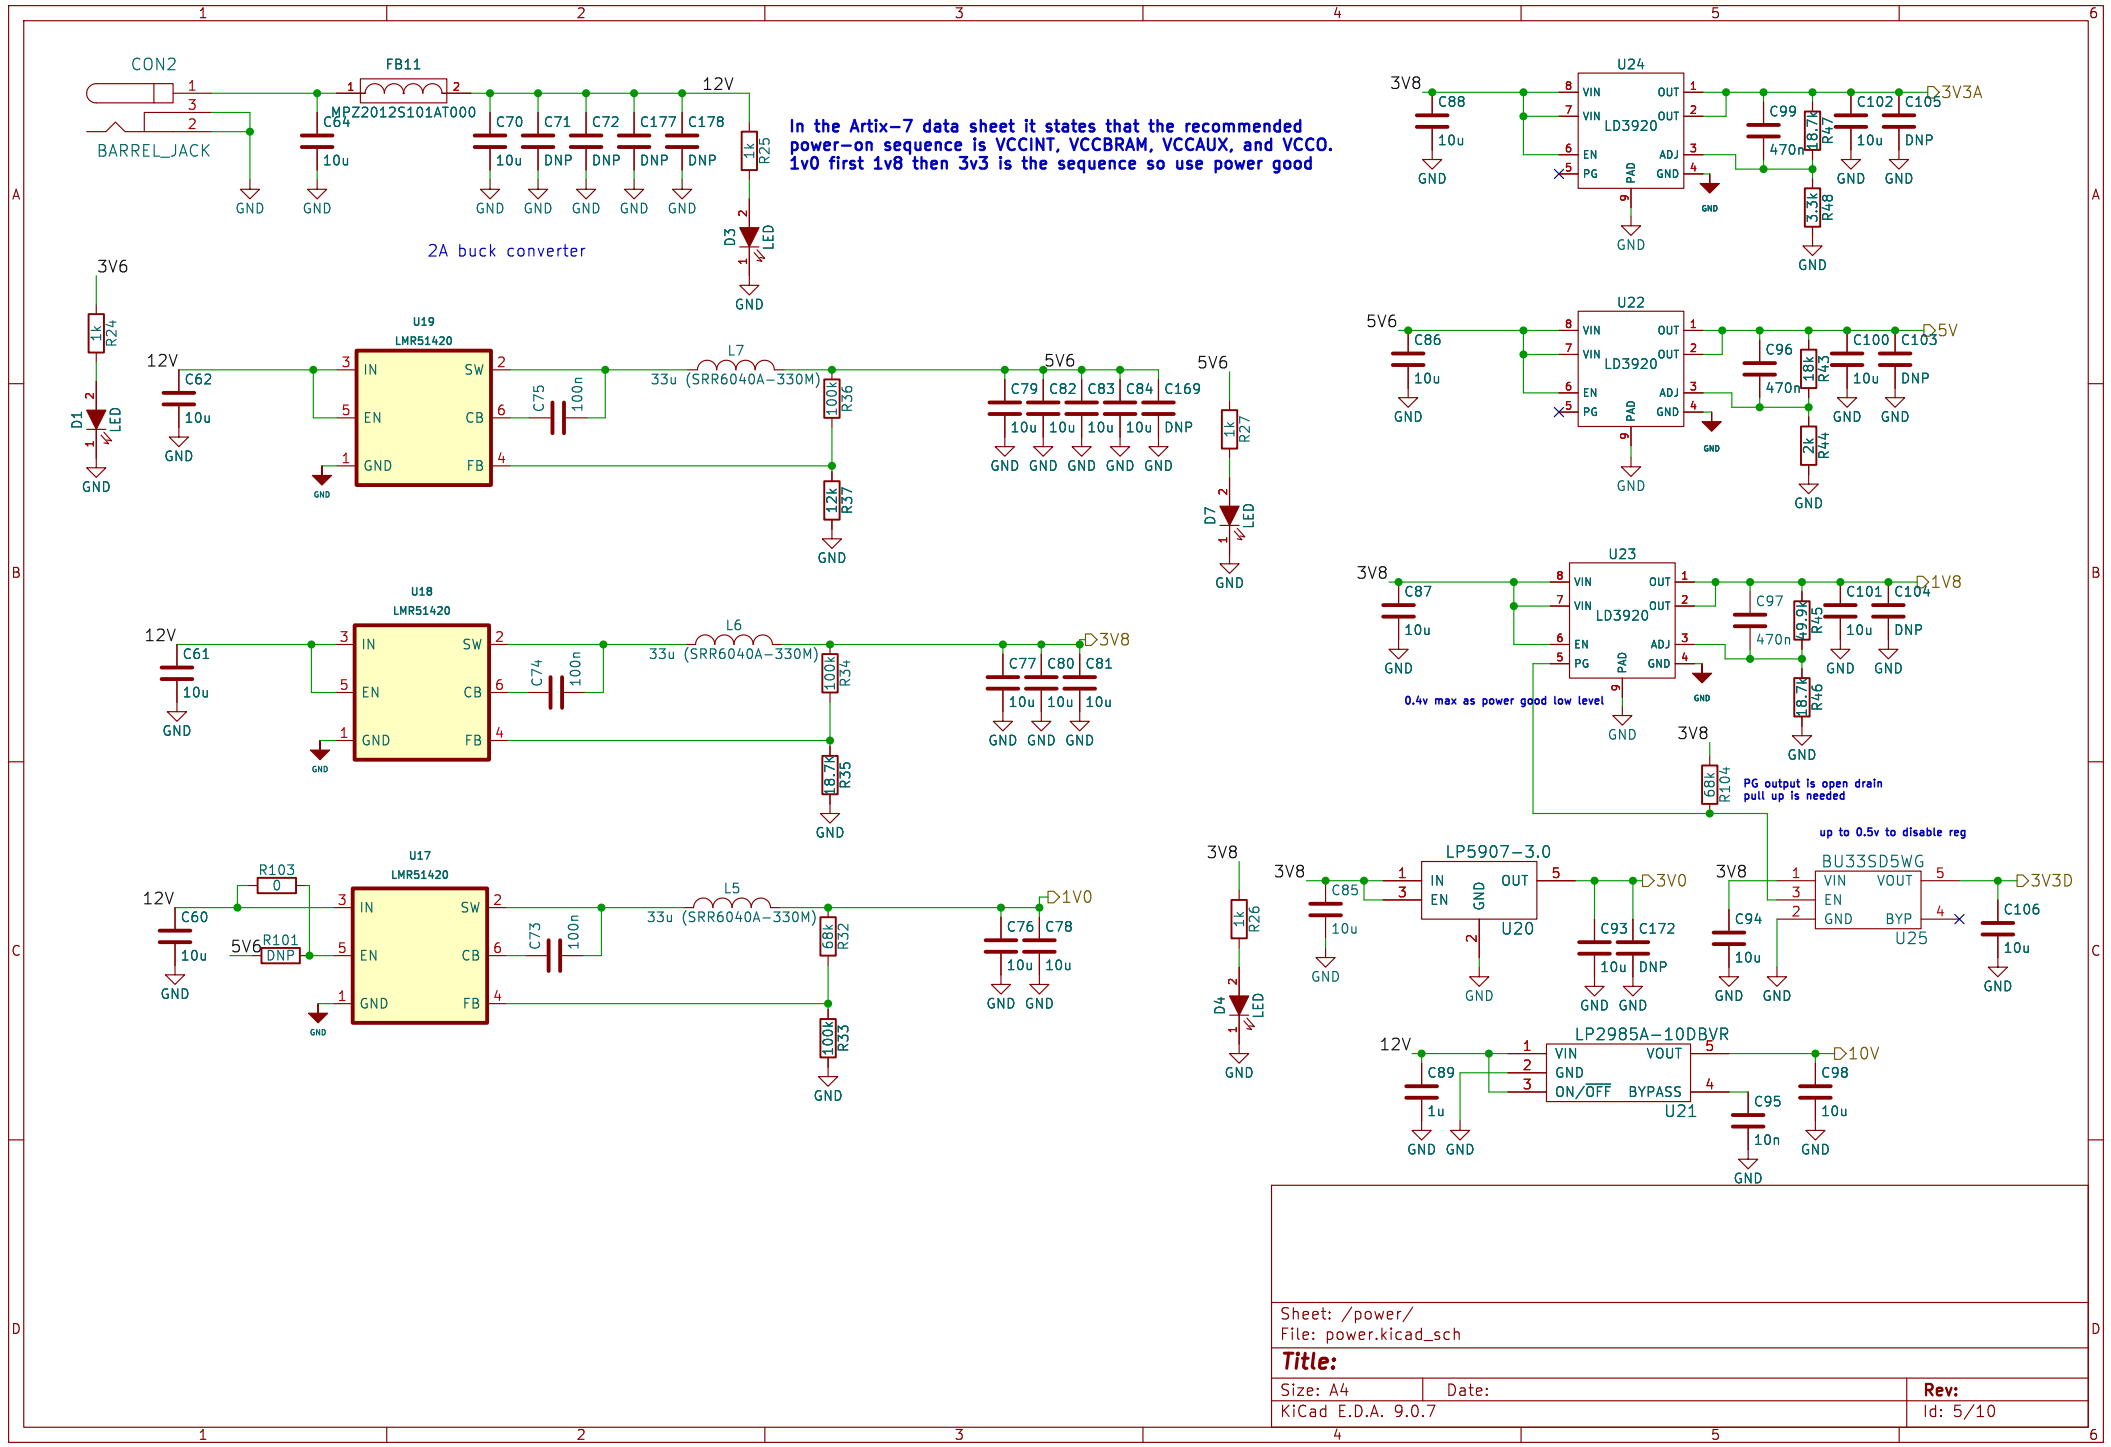


Sheet: /power/		
File: power.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 5/10


ADL5801 has 50 ohm network suggestion in its datasheet.
 However ADL5802 specifically states that it needs 200ohm diff
 Therefore i will use 100ohm pullup and will not use and transformers
 since the if will be below 10MHz or so.

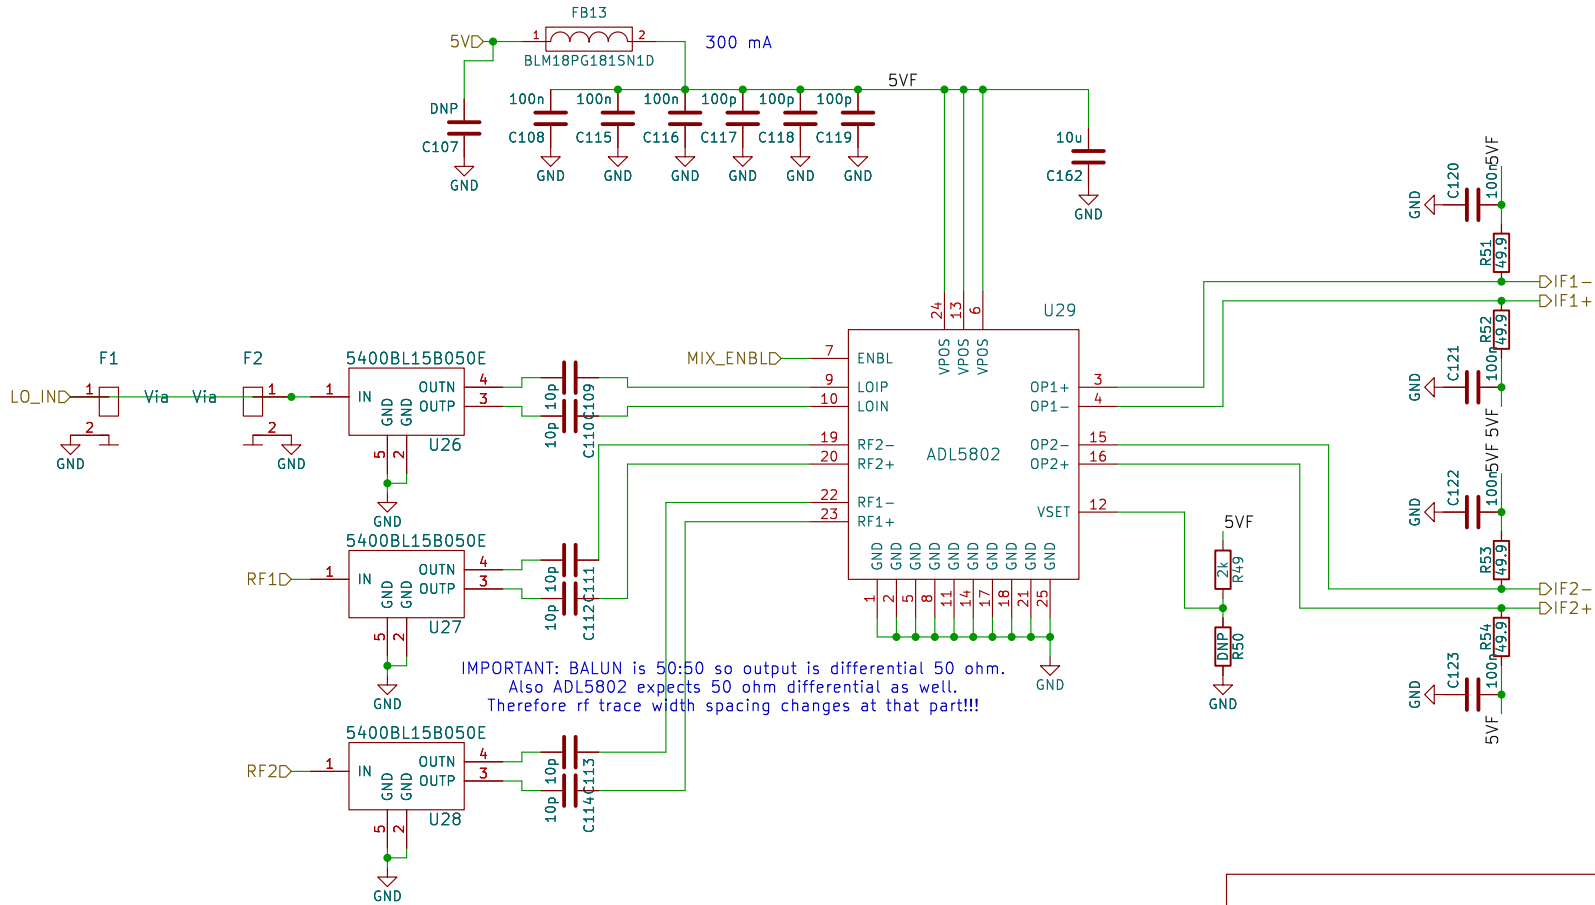


IMPORTANT: BALUN is 50:50 so output is differential 50 ohm.
 Also ADL5802 expects 50 ohm differential as well.
 Therefore rf trace width spacing changes at that part!!!

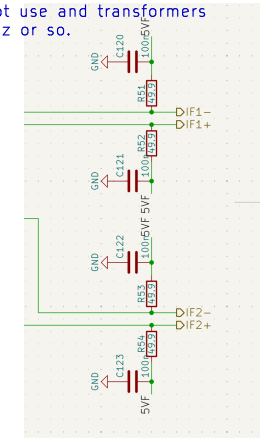

Sheet: /mixer/ File: mixer.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 6/10

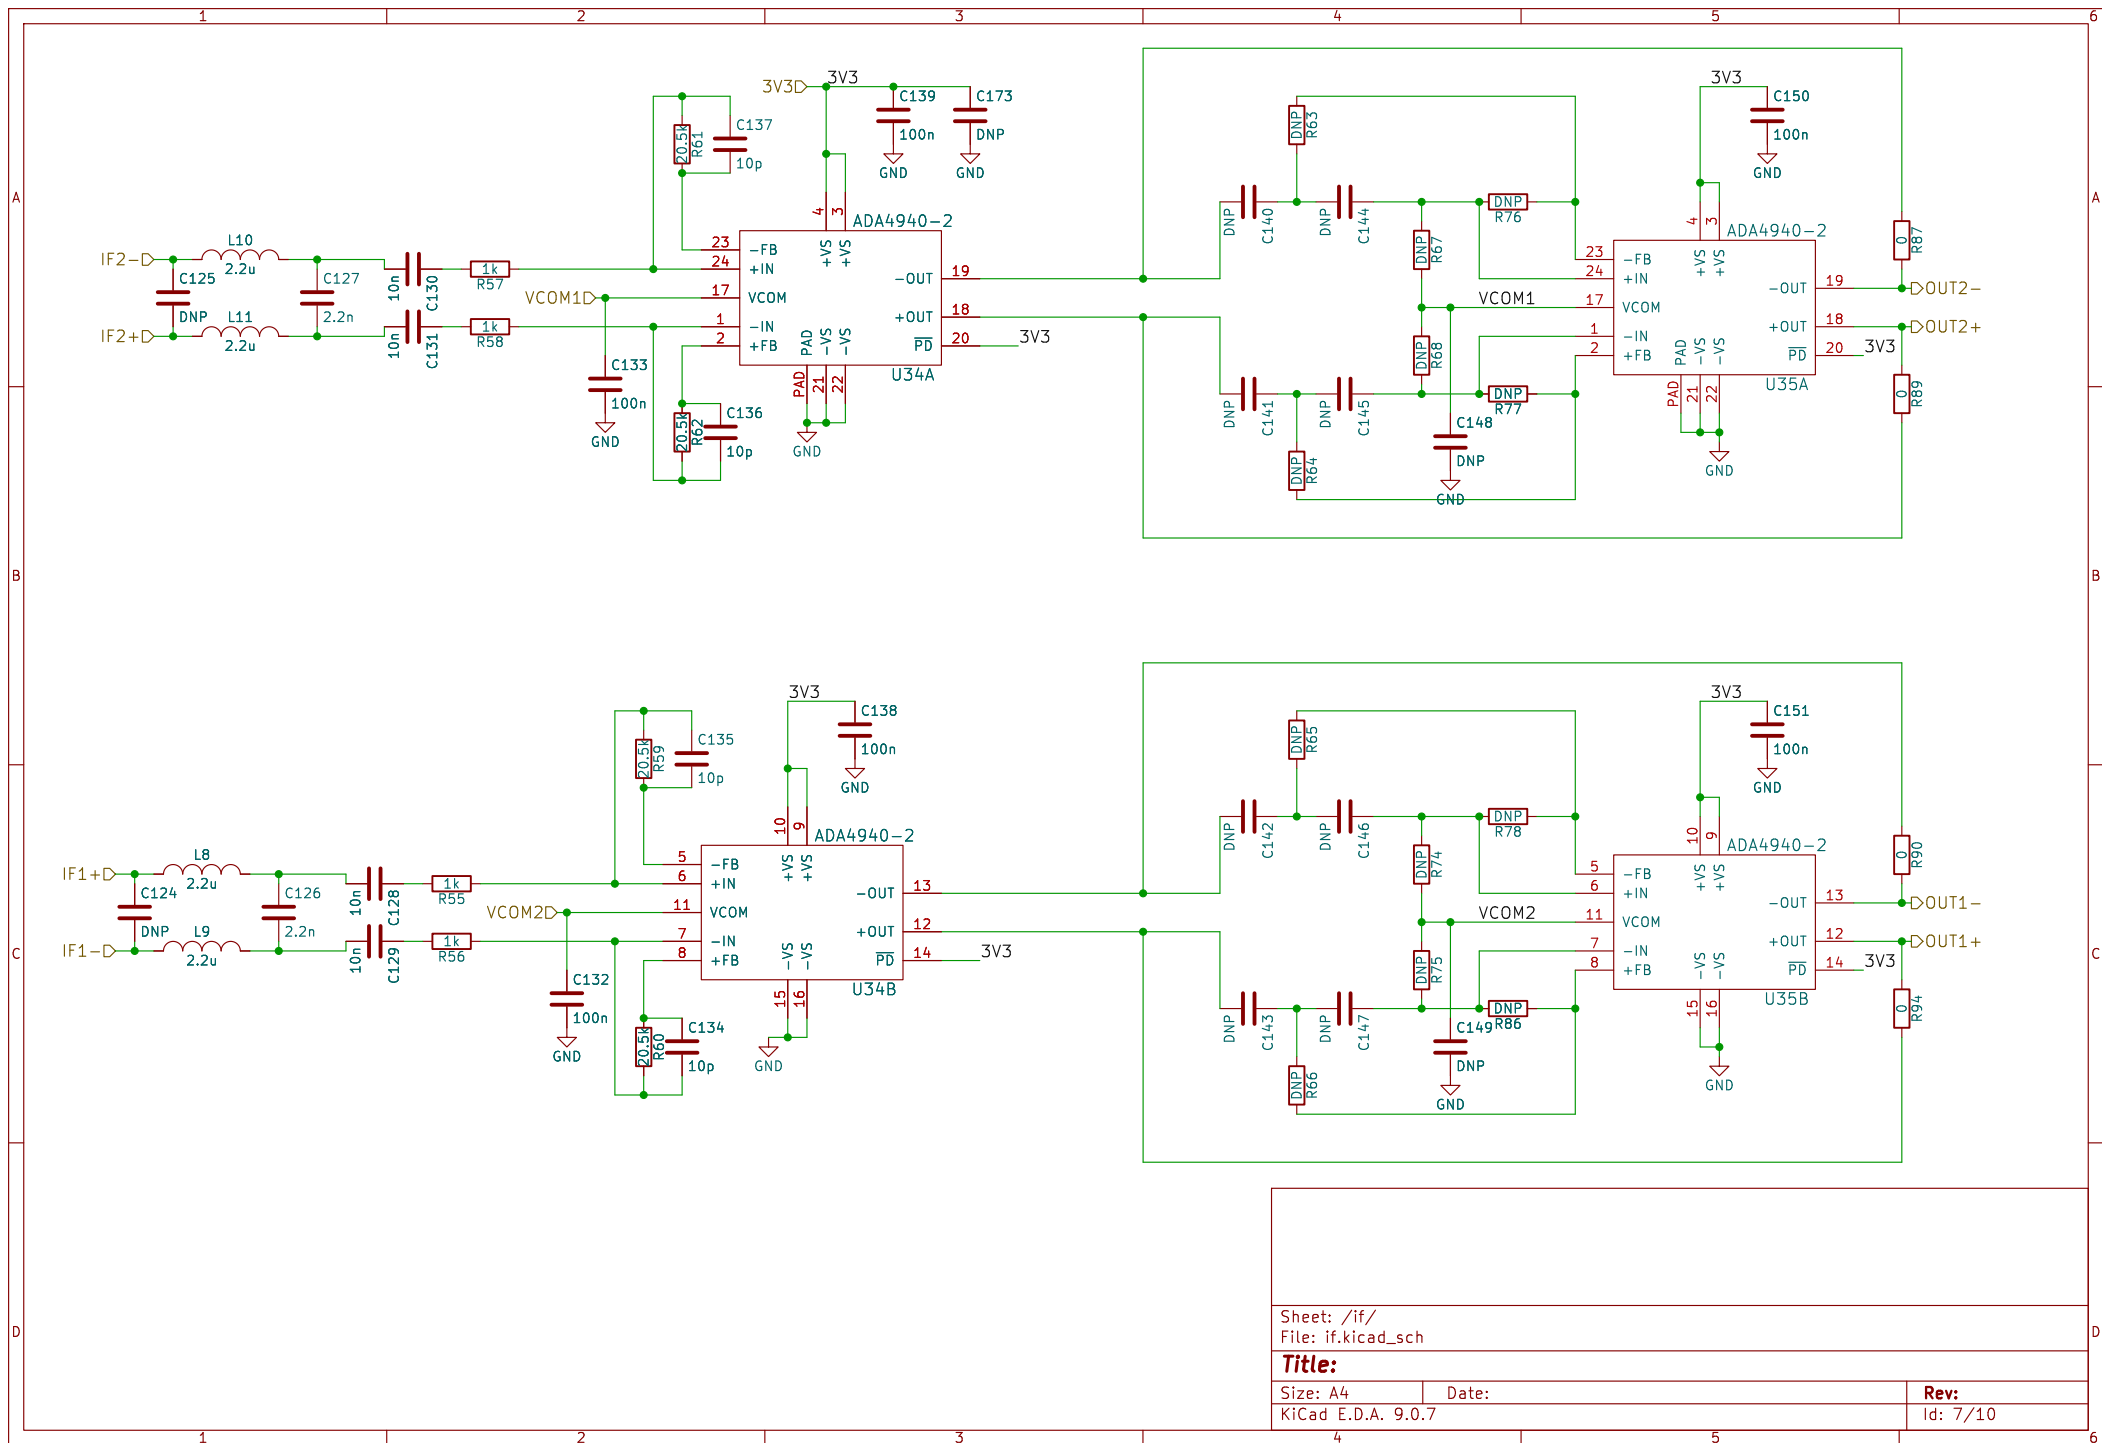

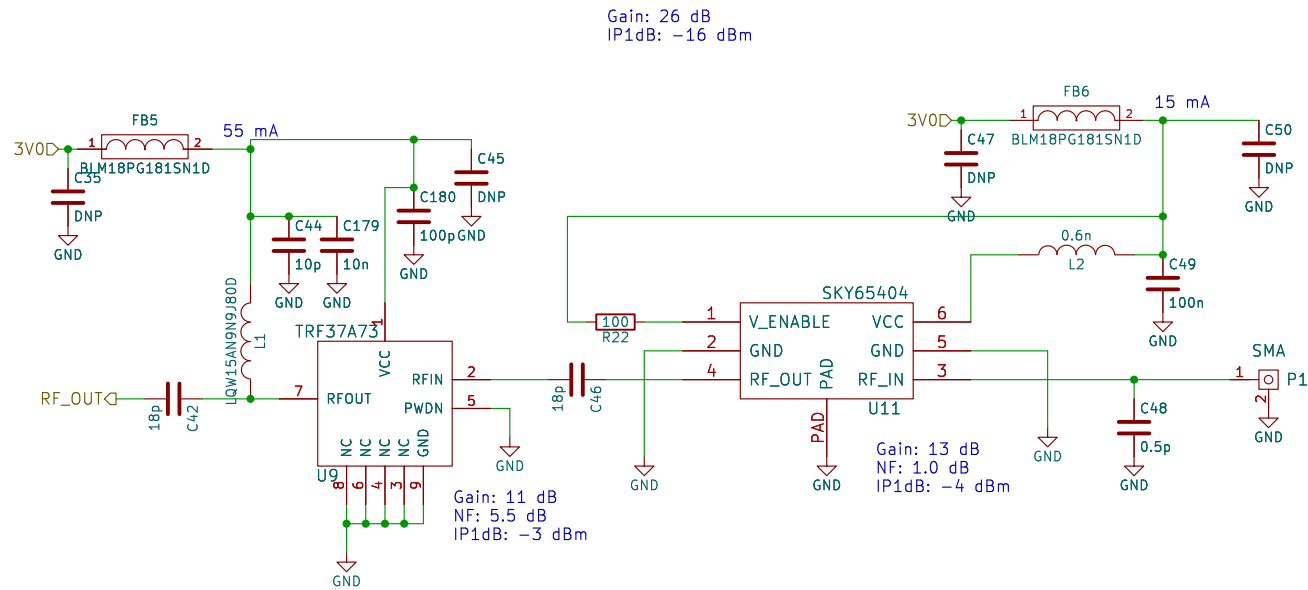

Sheet: /rx1/
File: rx.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 9/10

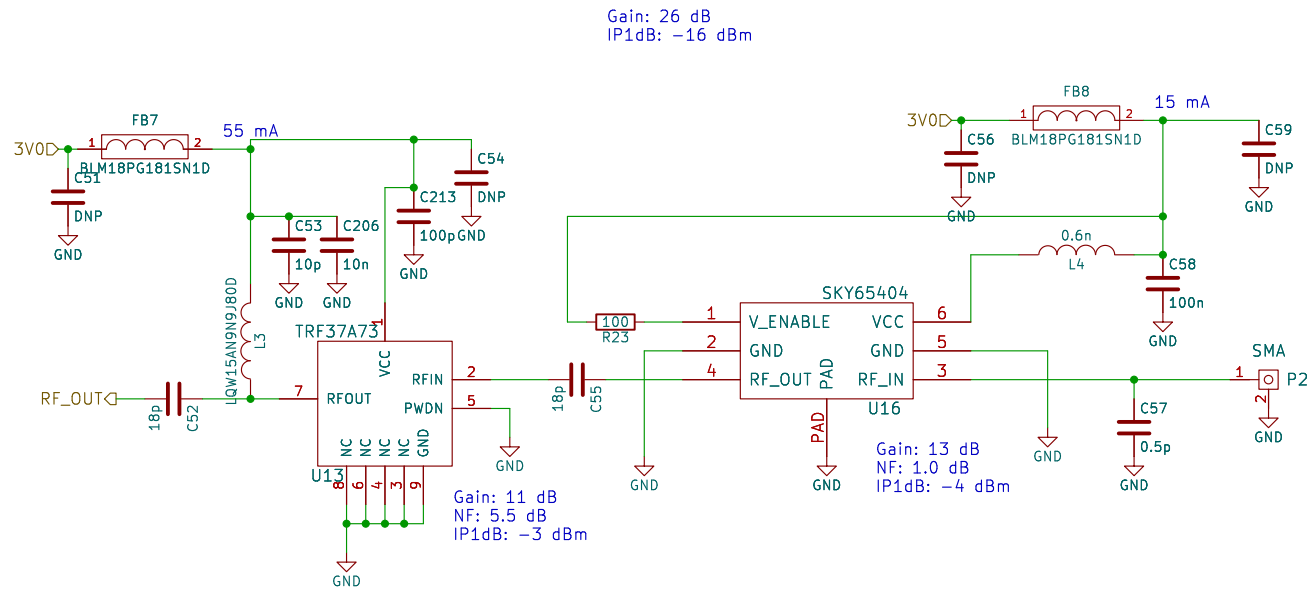

Sheet: /rx2/
File: rx.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 10/10