





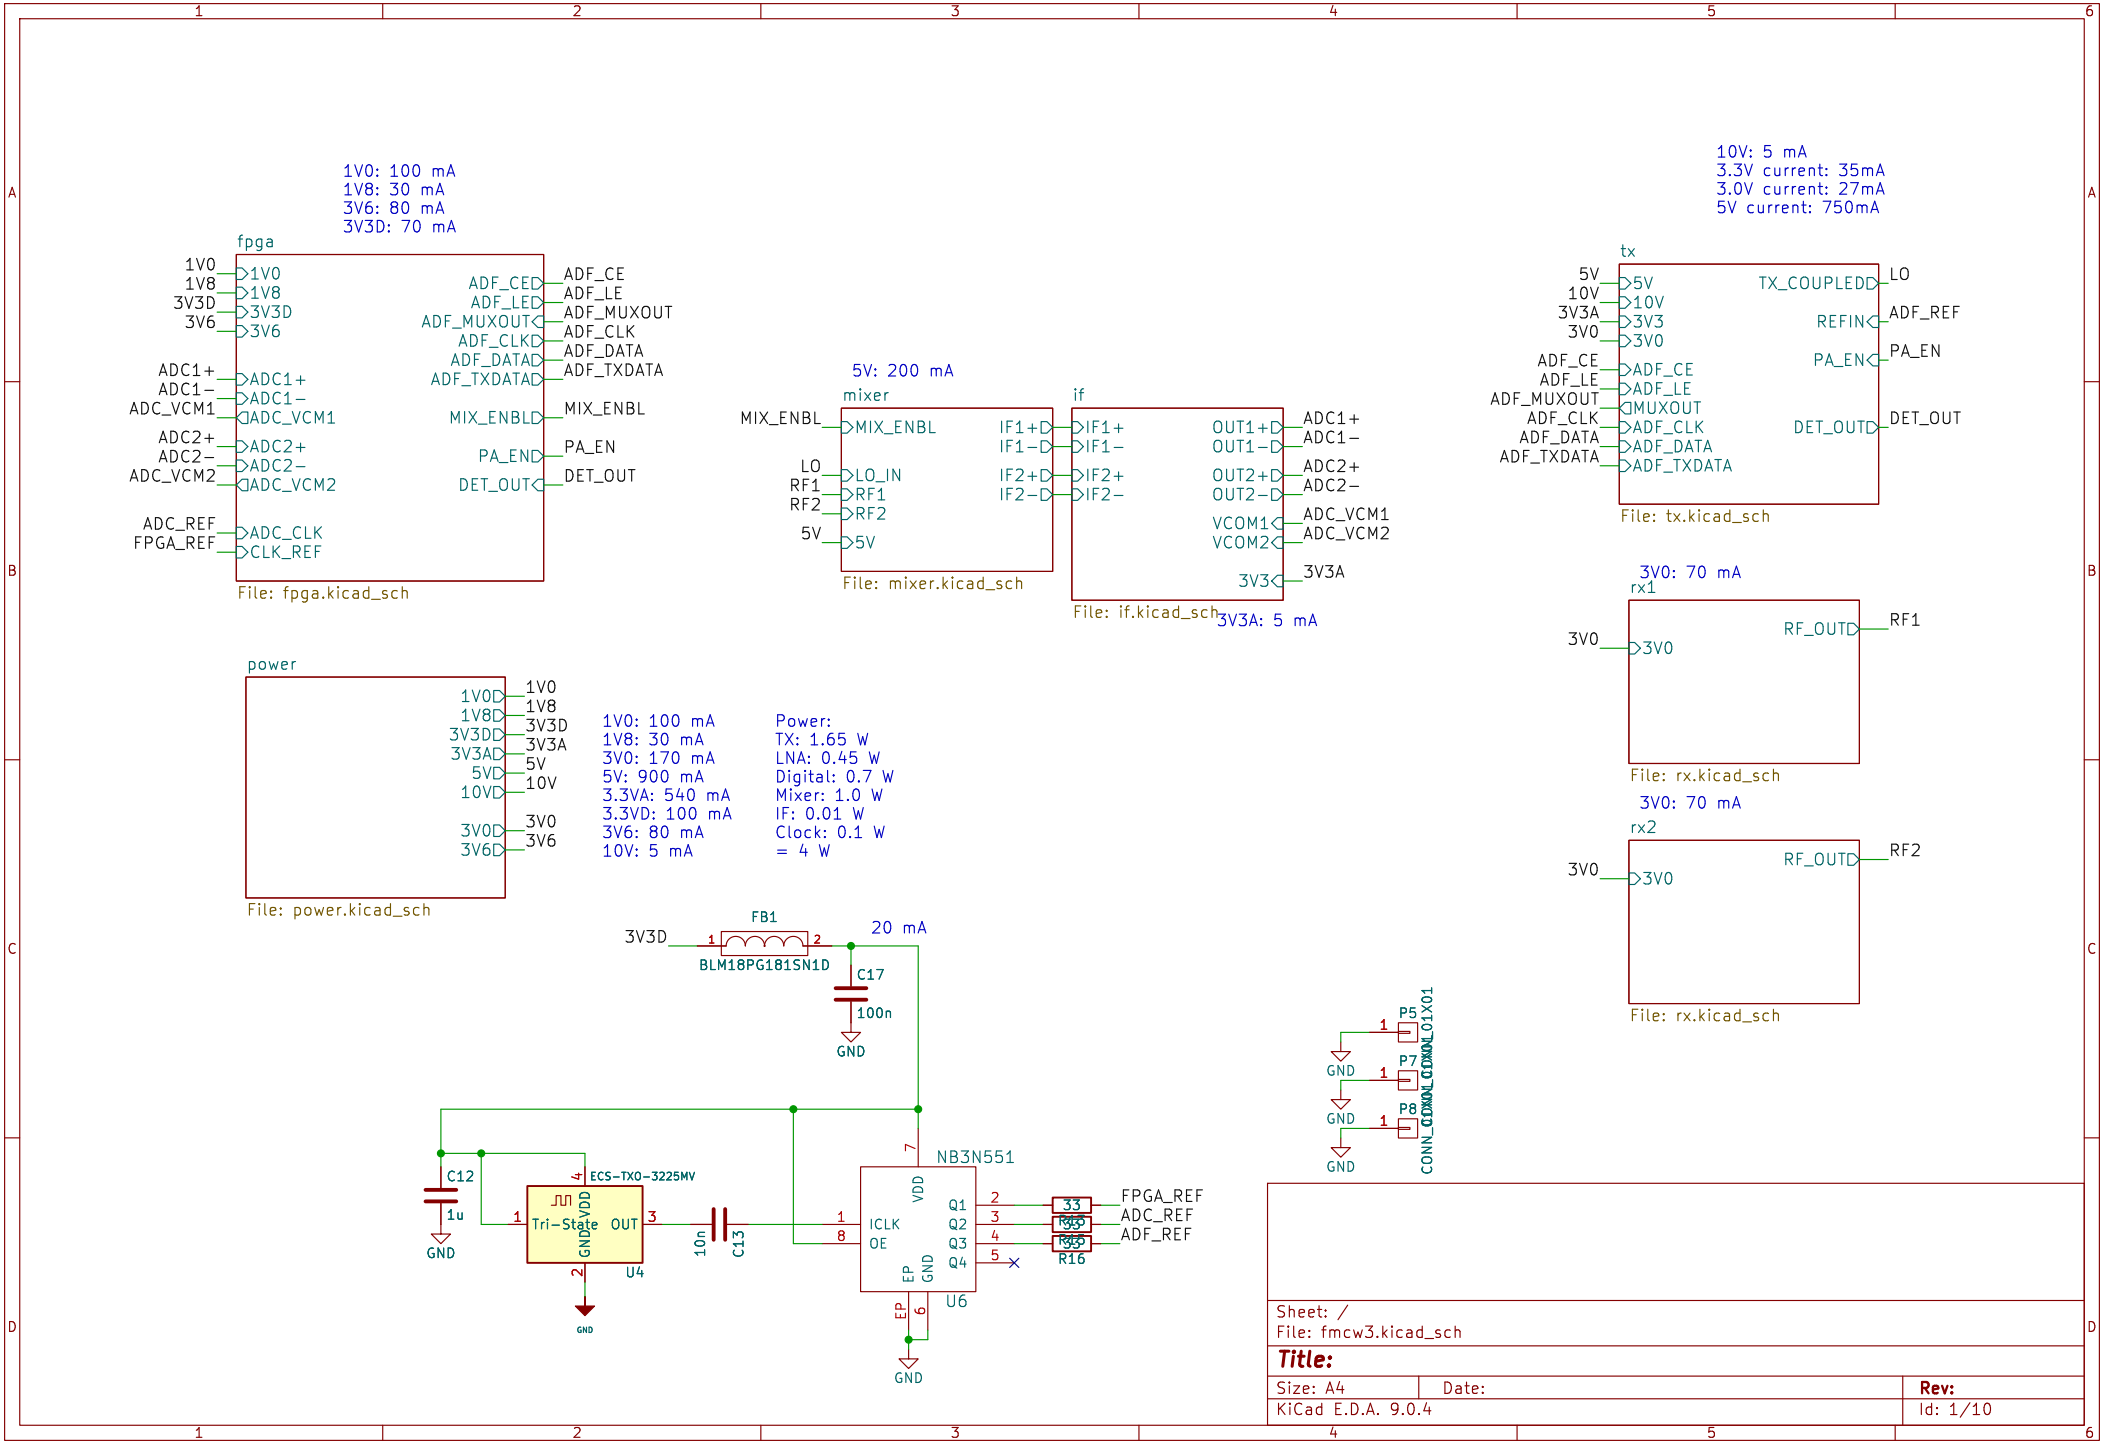




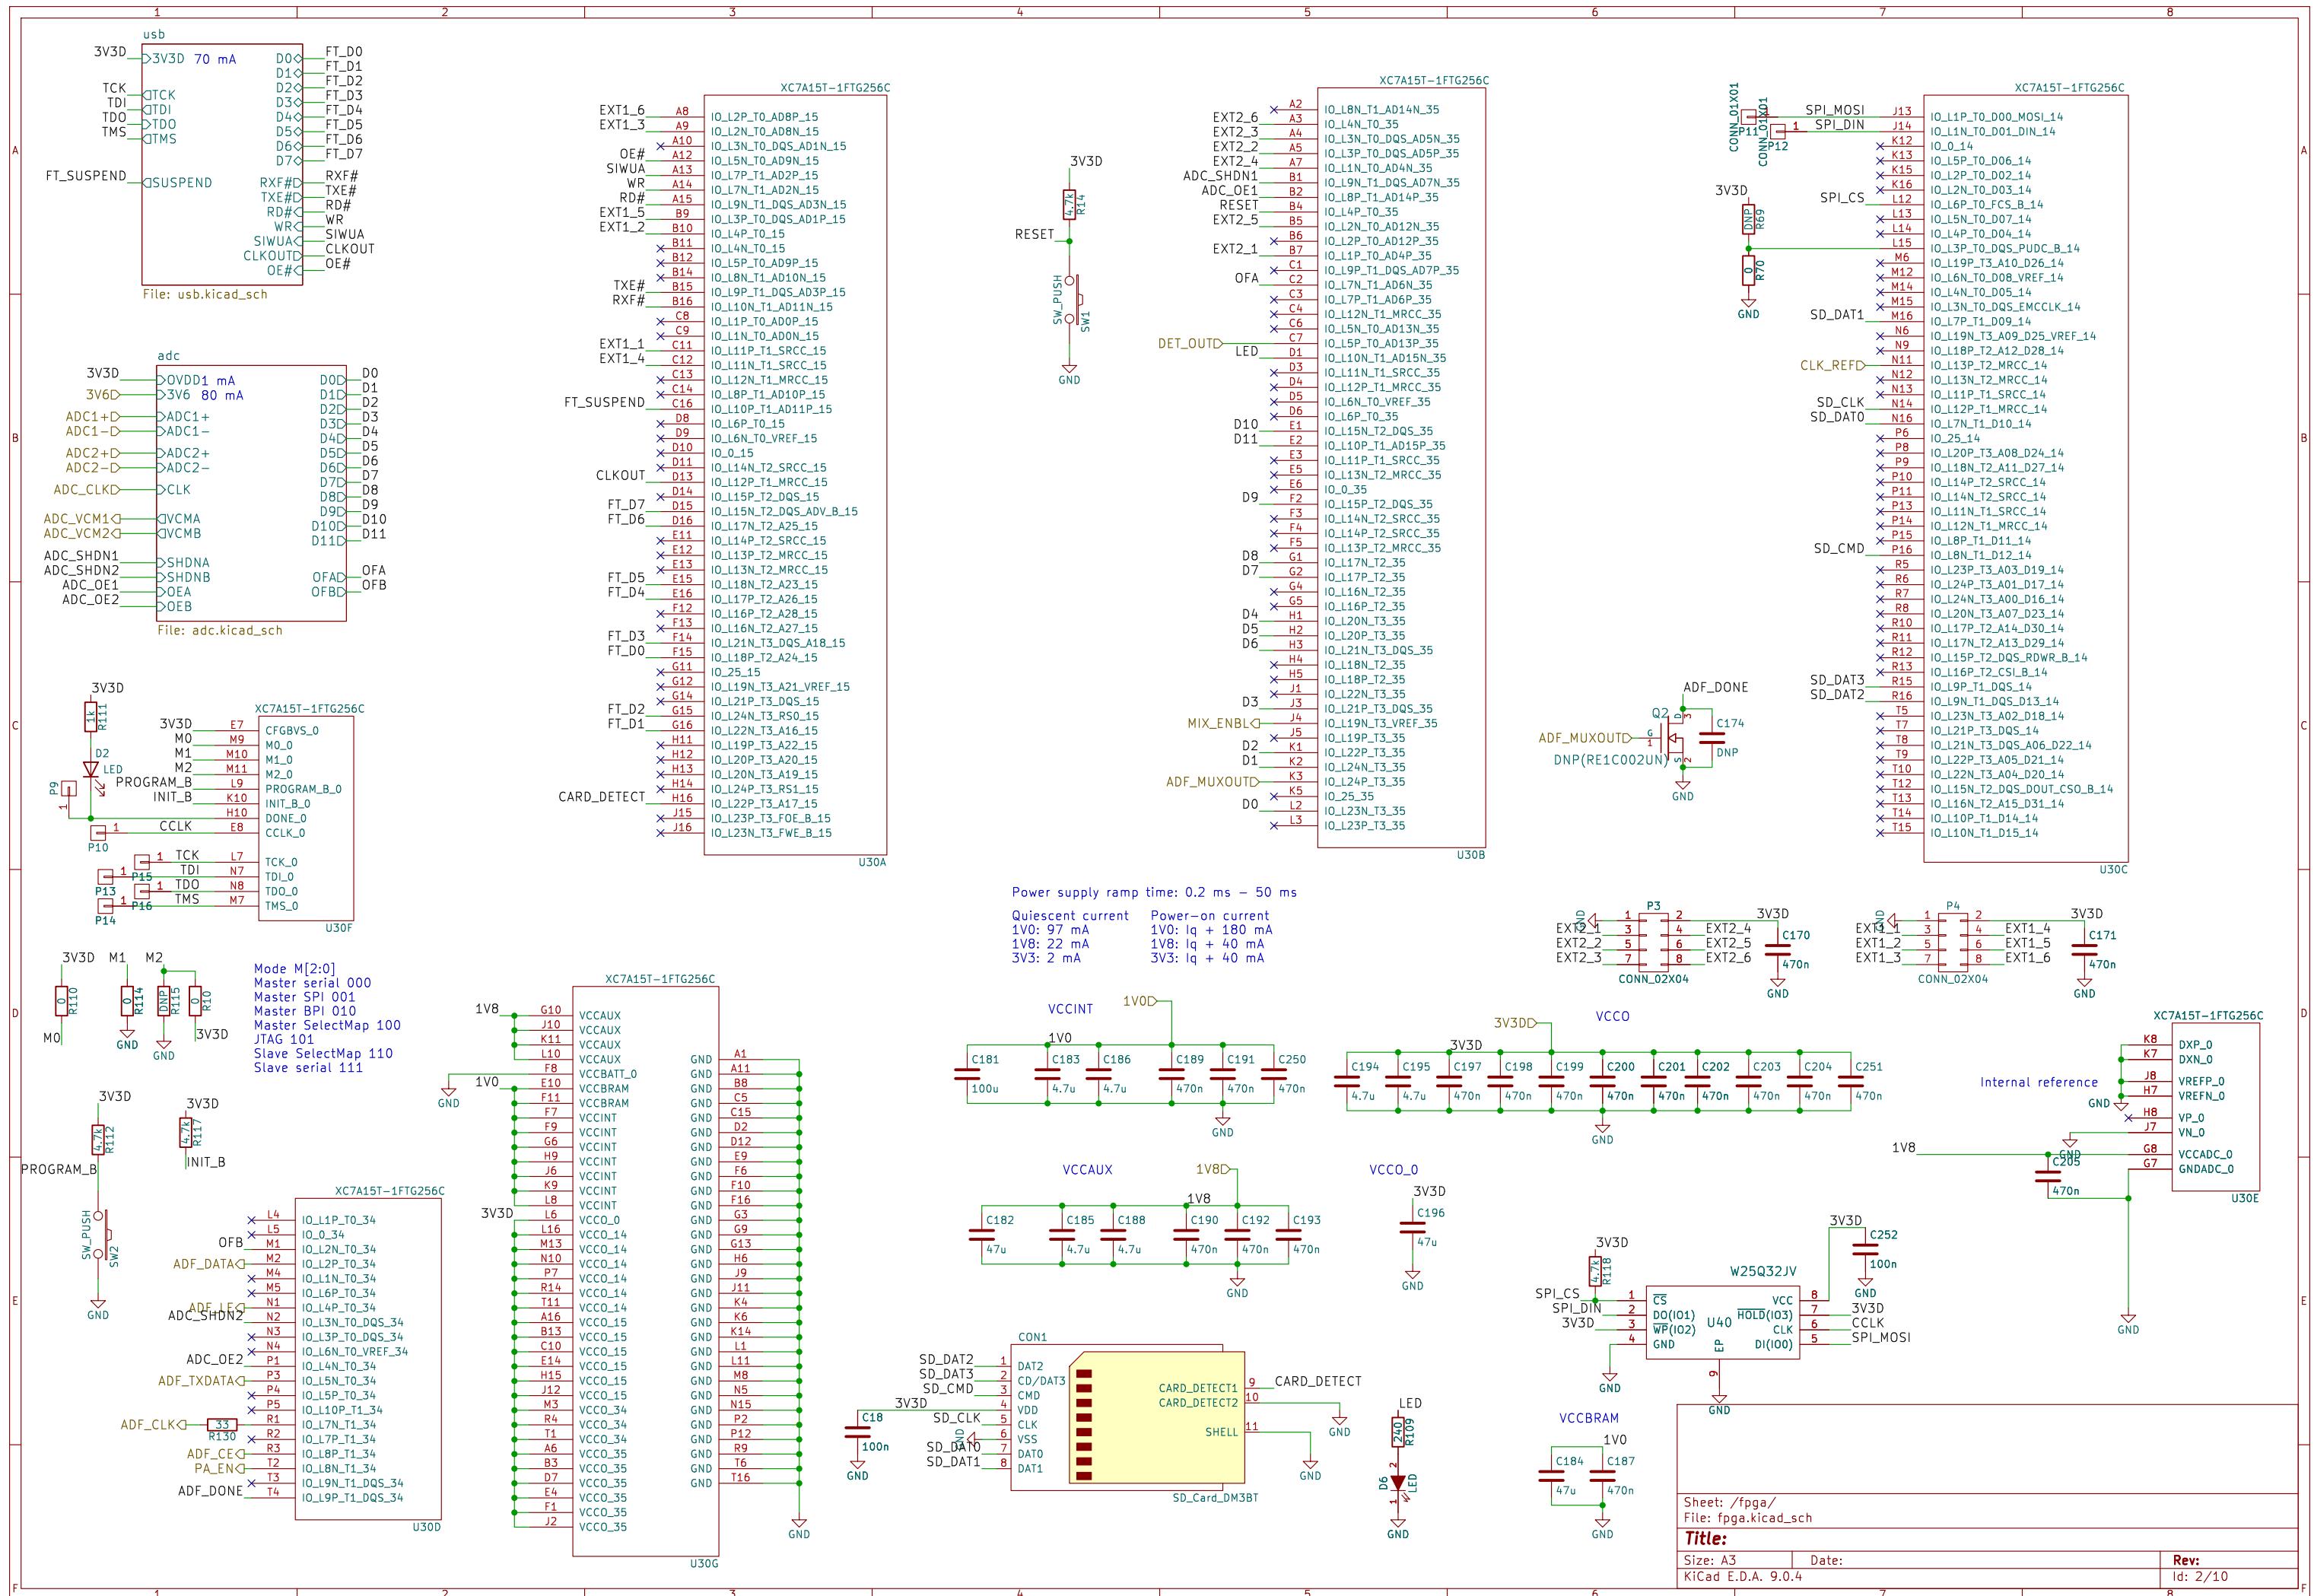


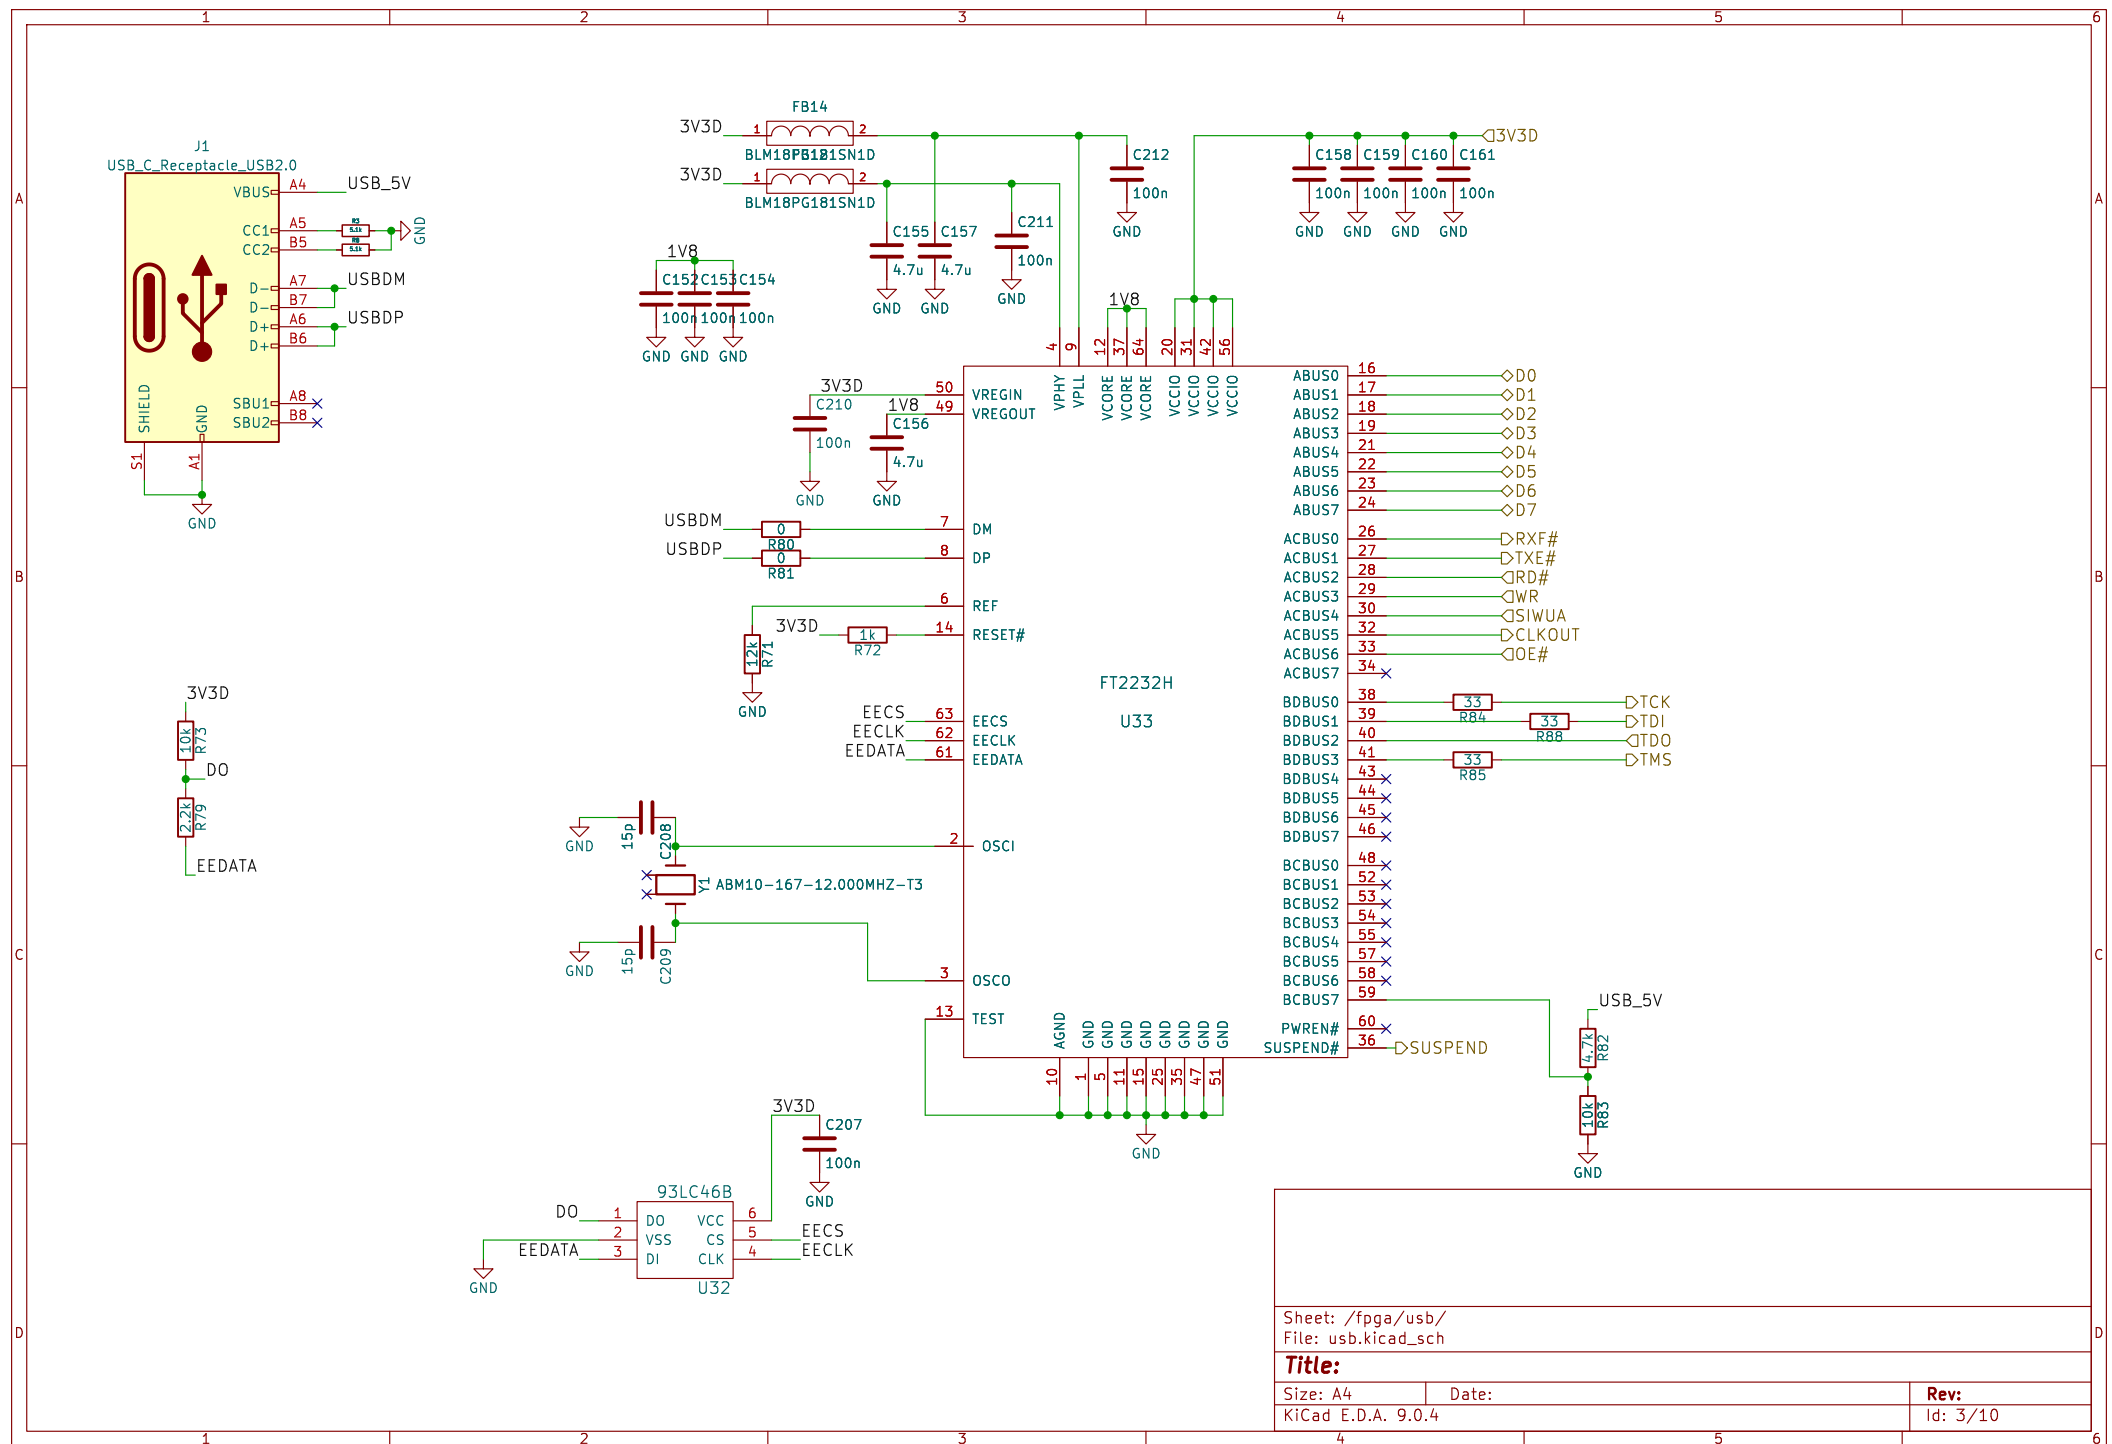


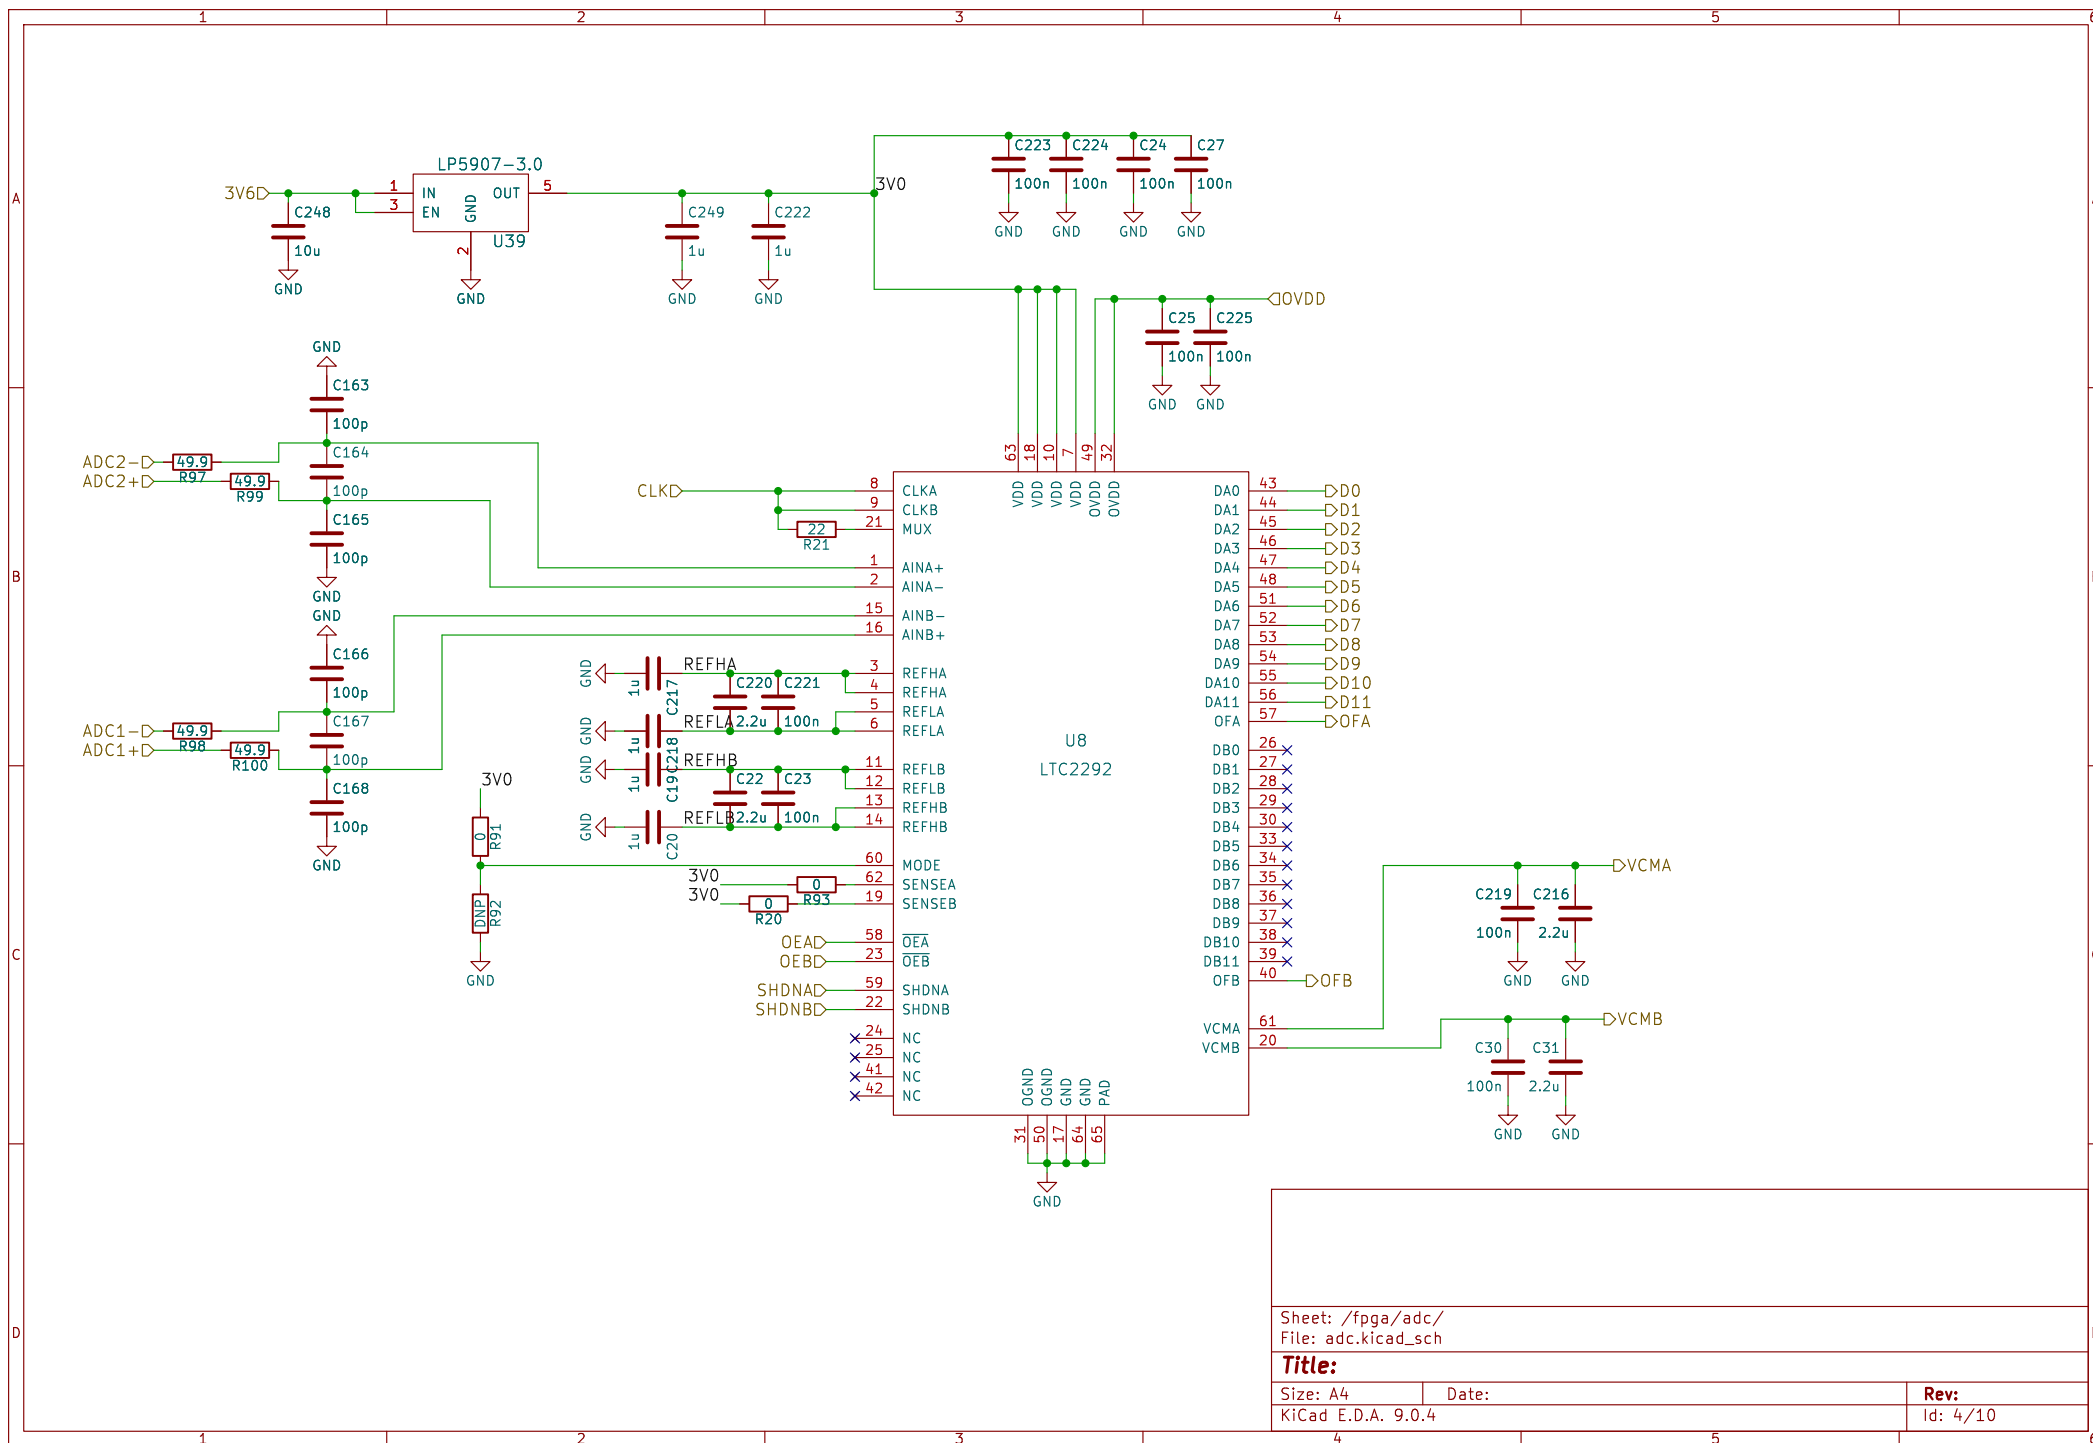

In the Artix-7 data sheet it states that the recommended power-on sequence is VCCINT, VCCBRAM, VCCAUX, and VCCO. 1v0 first 1v8 then 3v3 is the sequence so use power good

2A buck converter

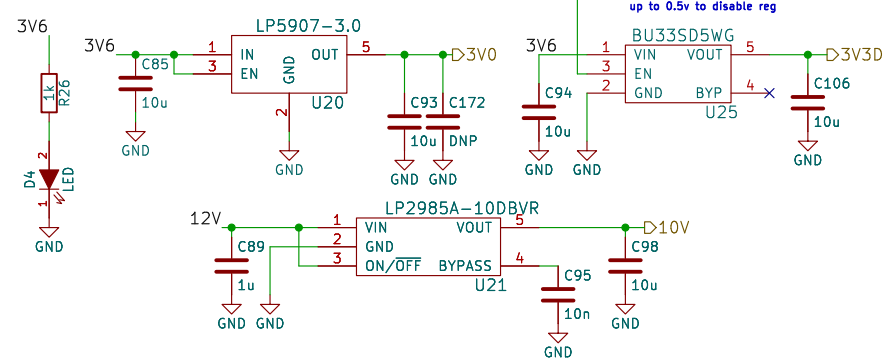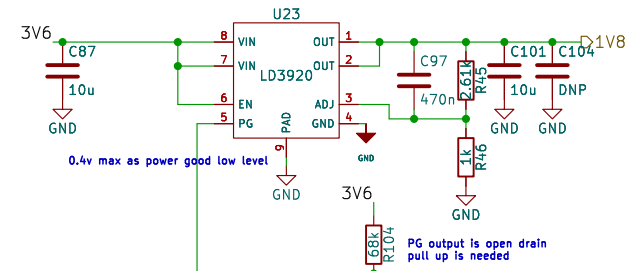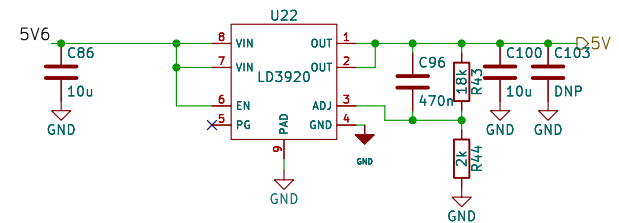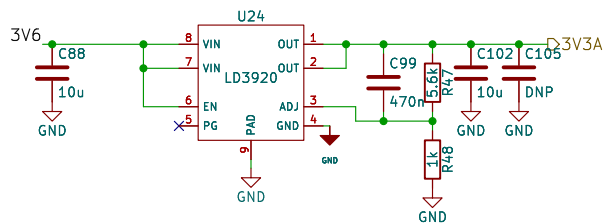

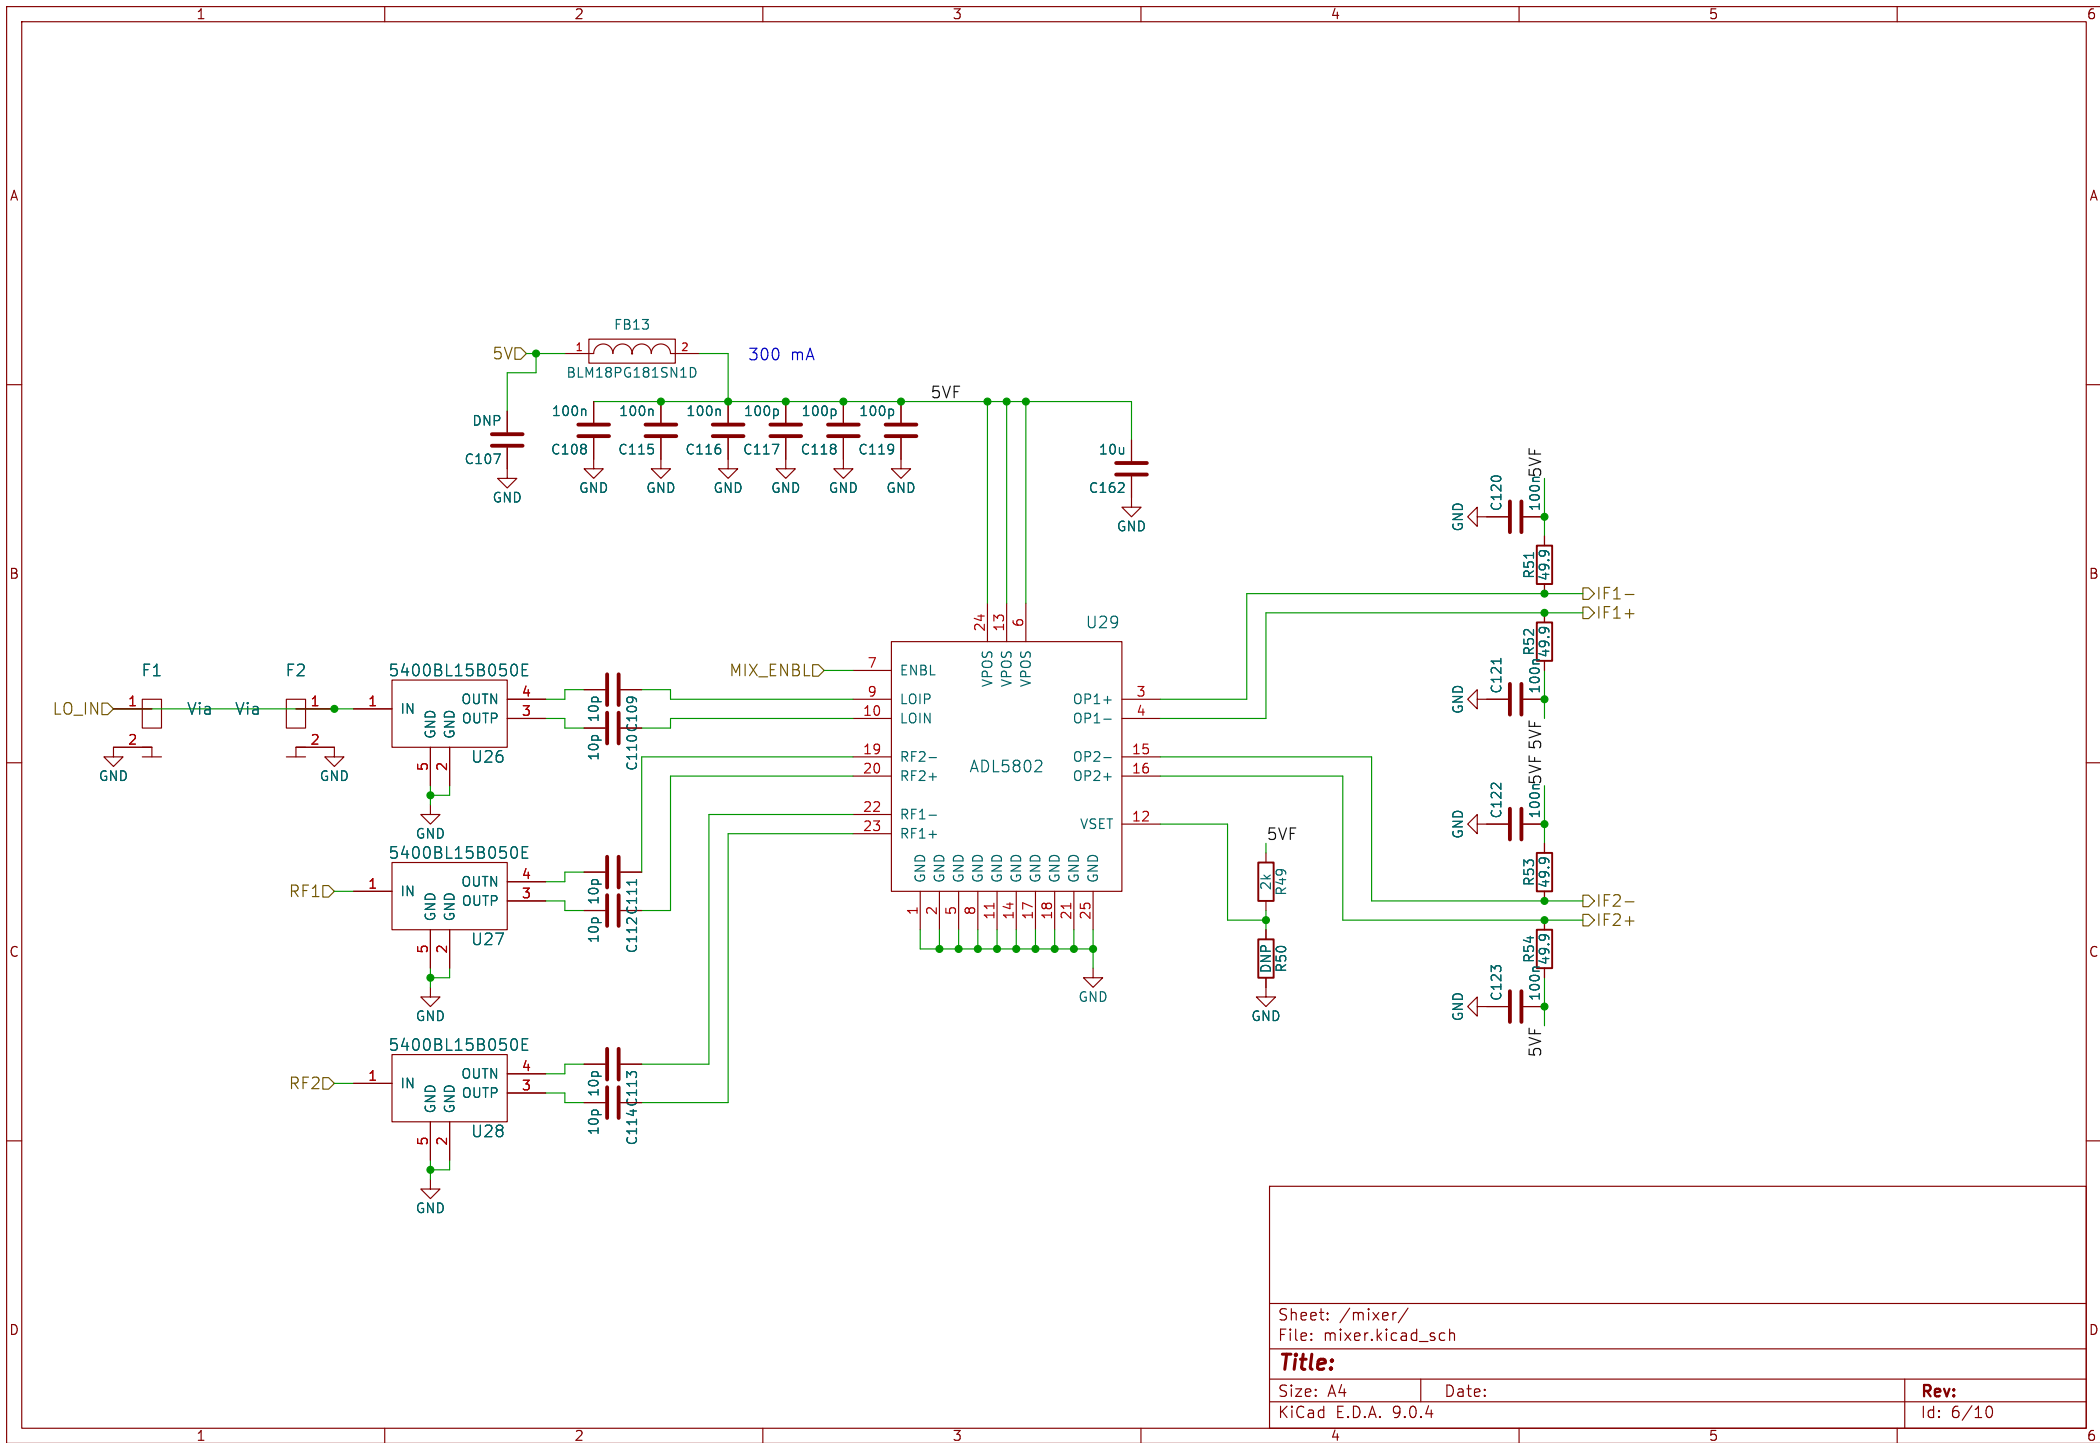


Sheet: /mixer/
File: mixer.kicad_sch


Title:


Size: A4
KiCad E.D.A. 9.0.4

Date:

Rev:
Id: 6/10

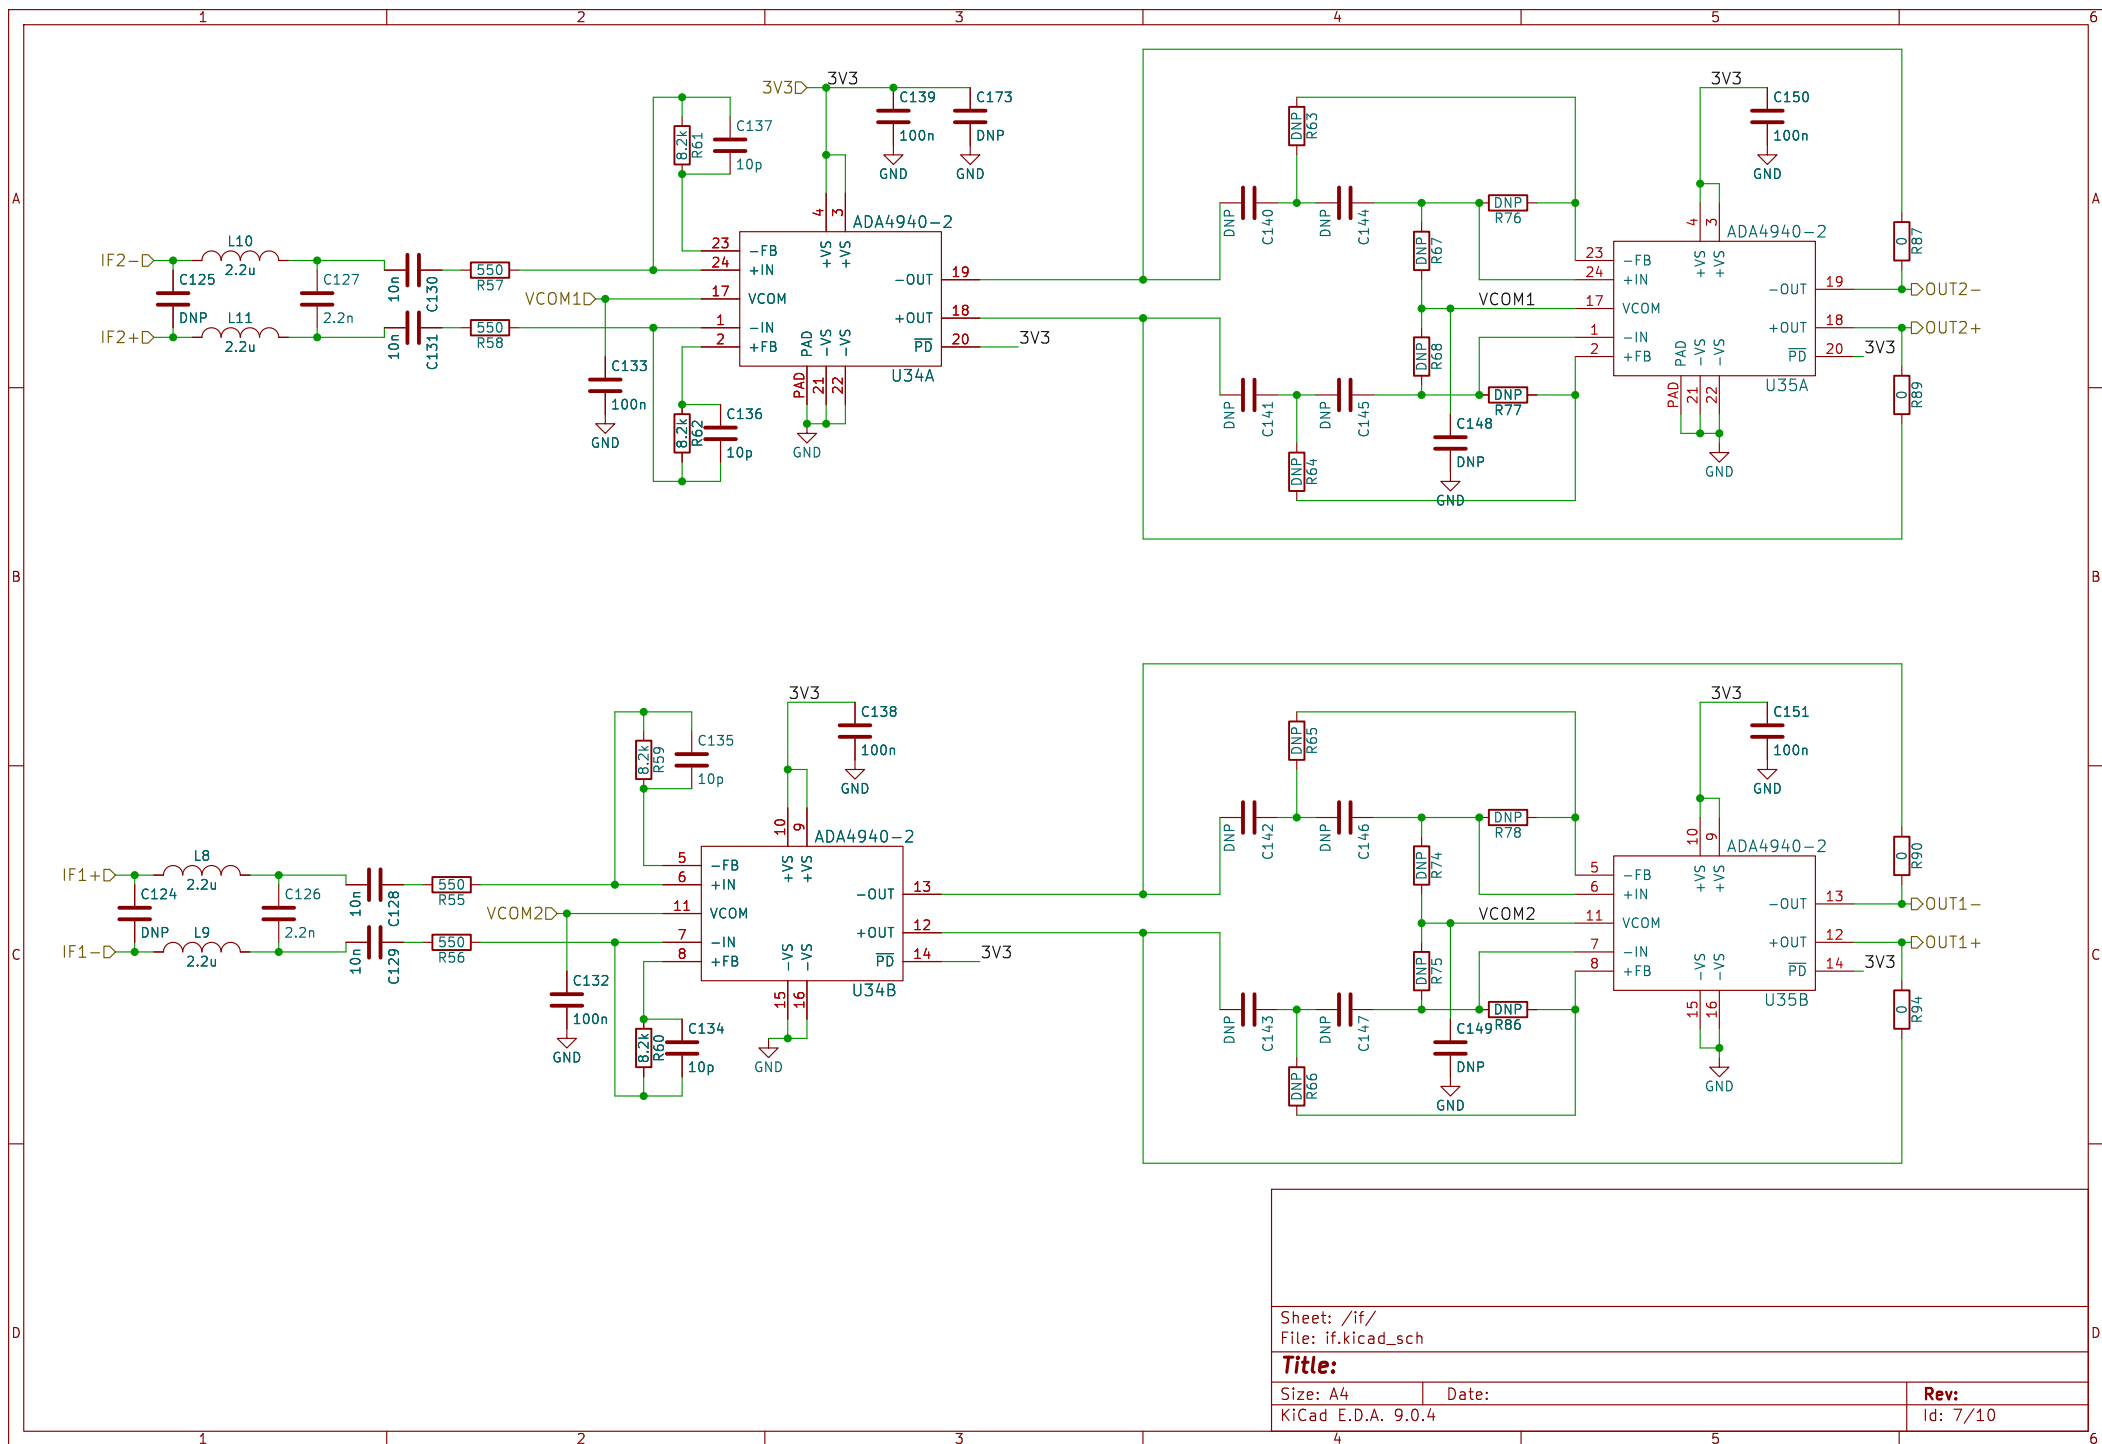

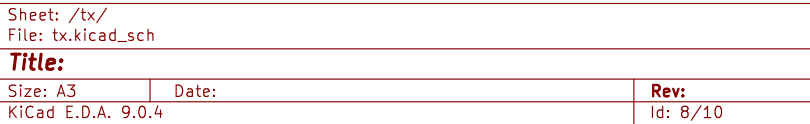

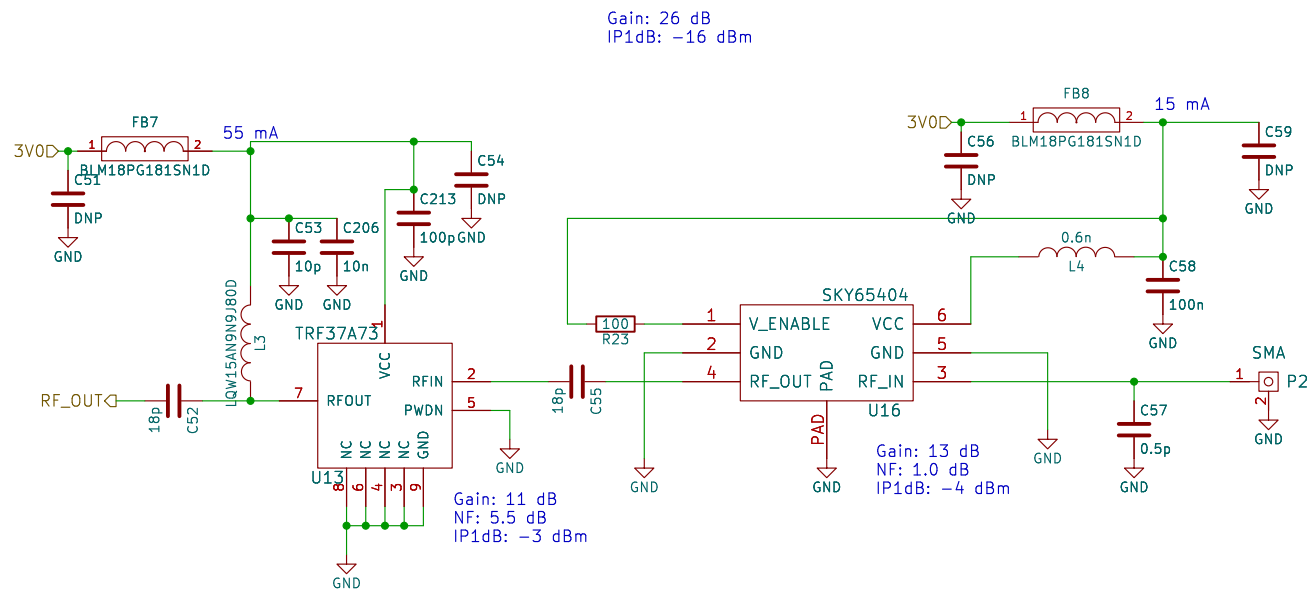

3.0V current: 70mA

Sheet: /rx2/
File: rx.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.4

Id: 10/10