






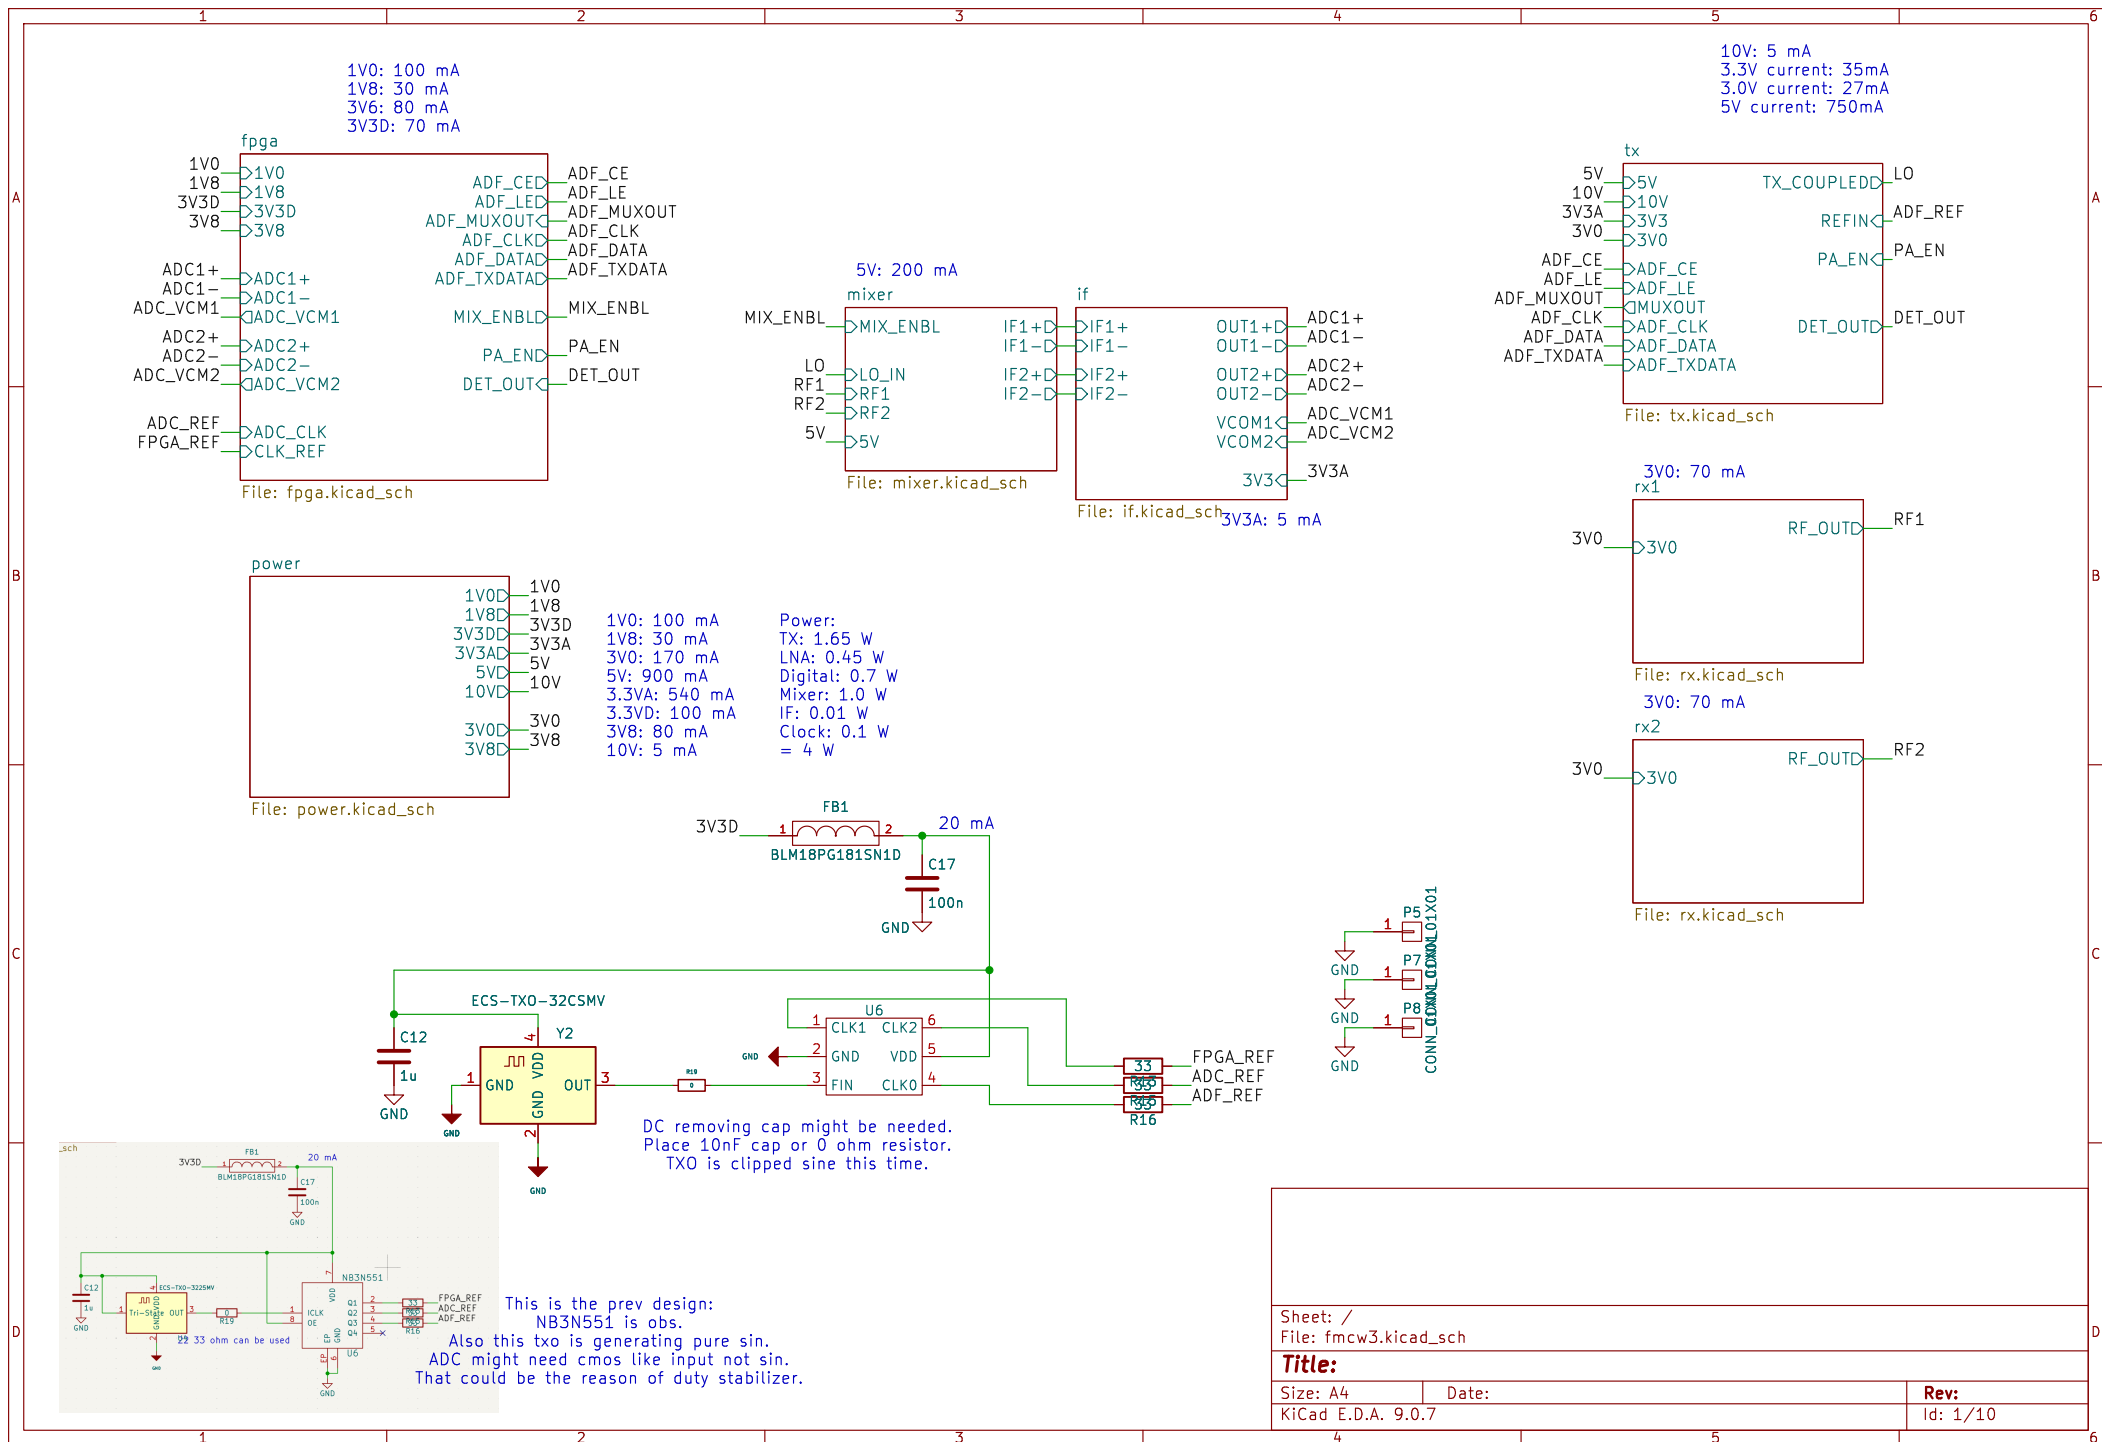

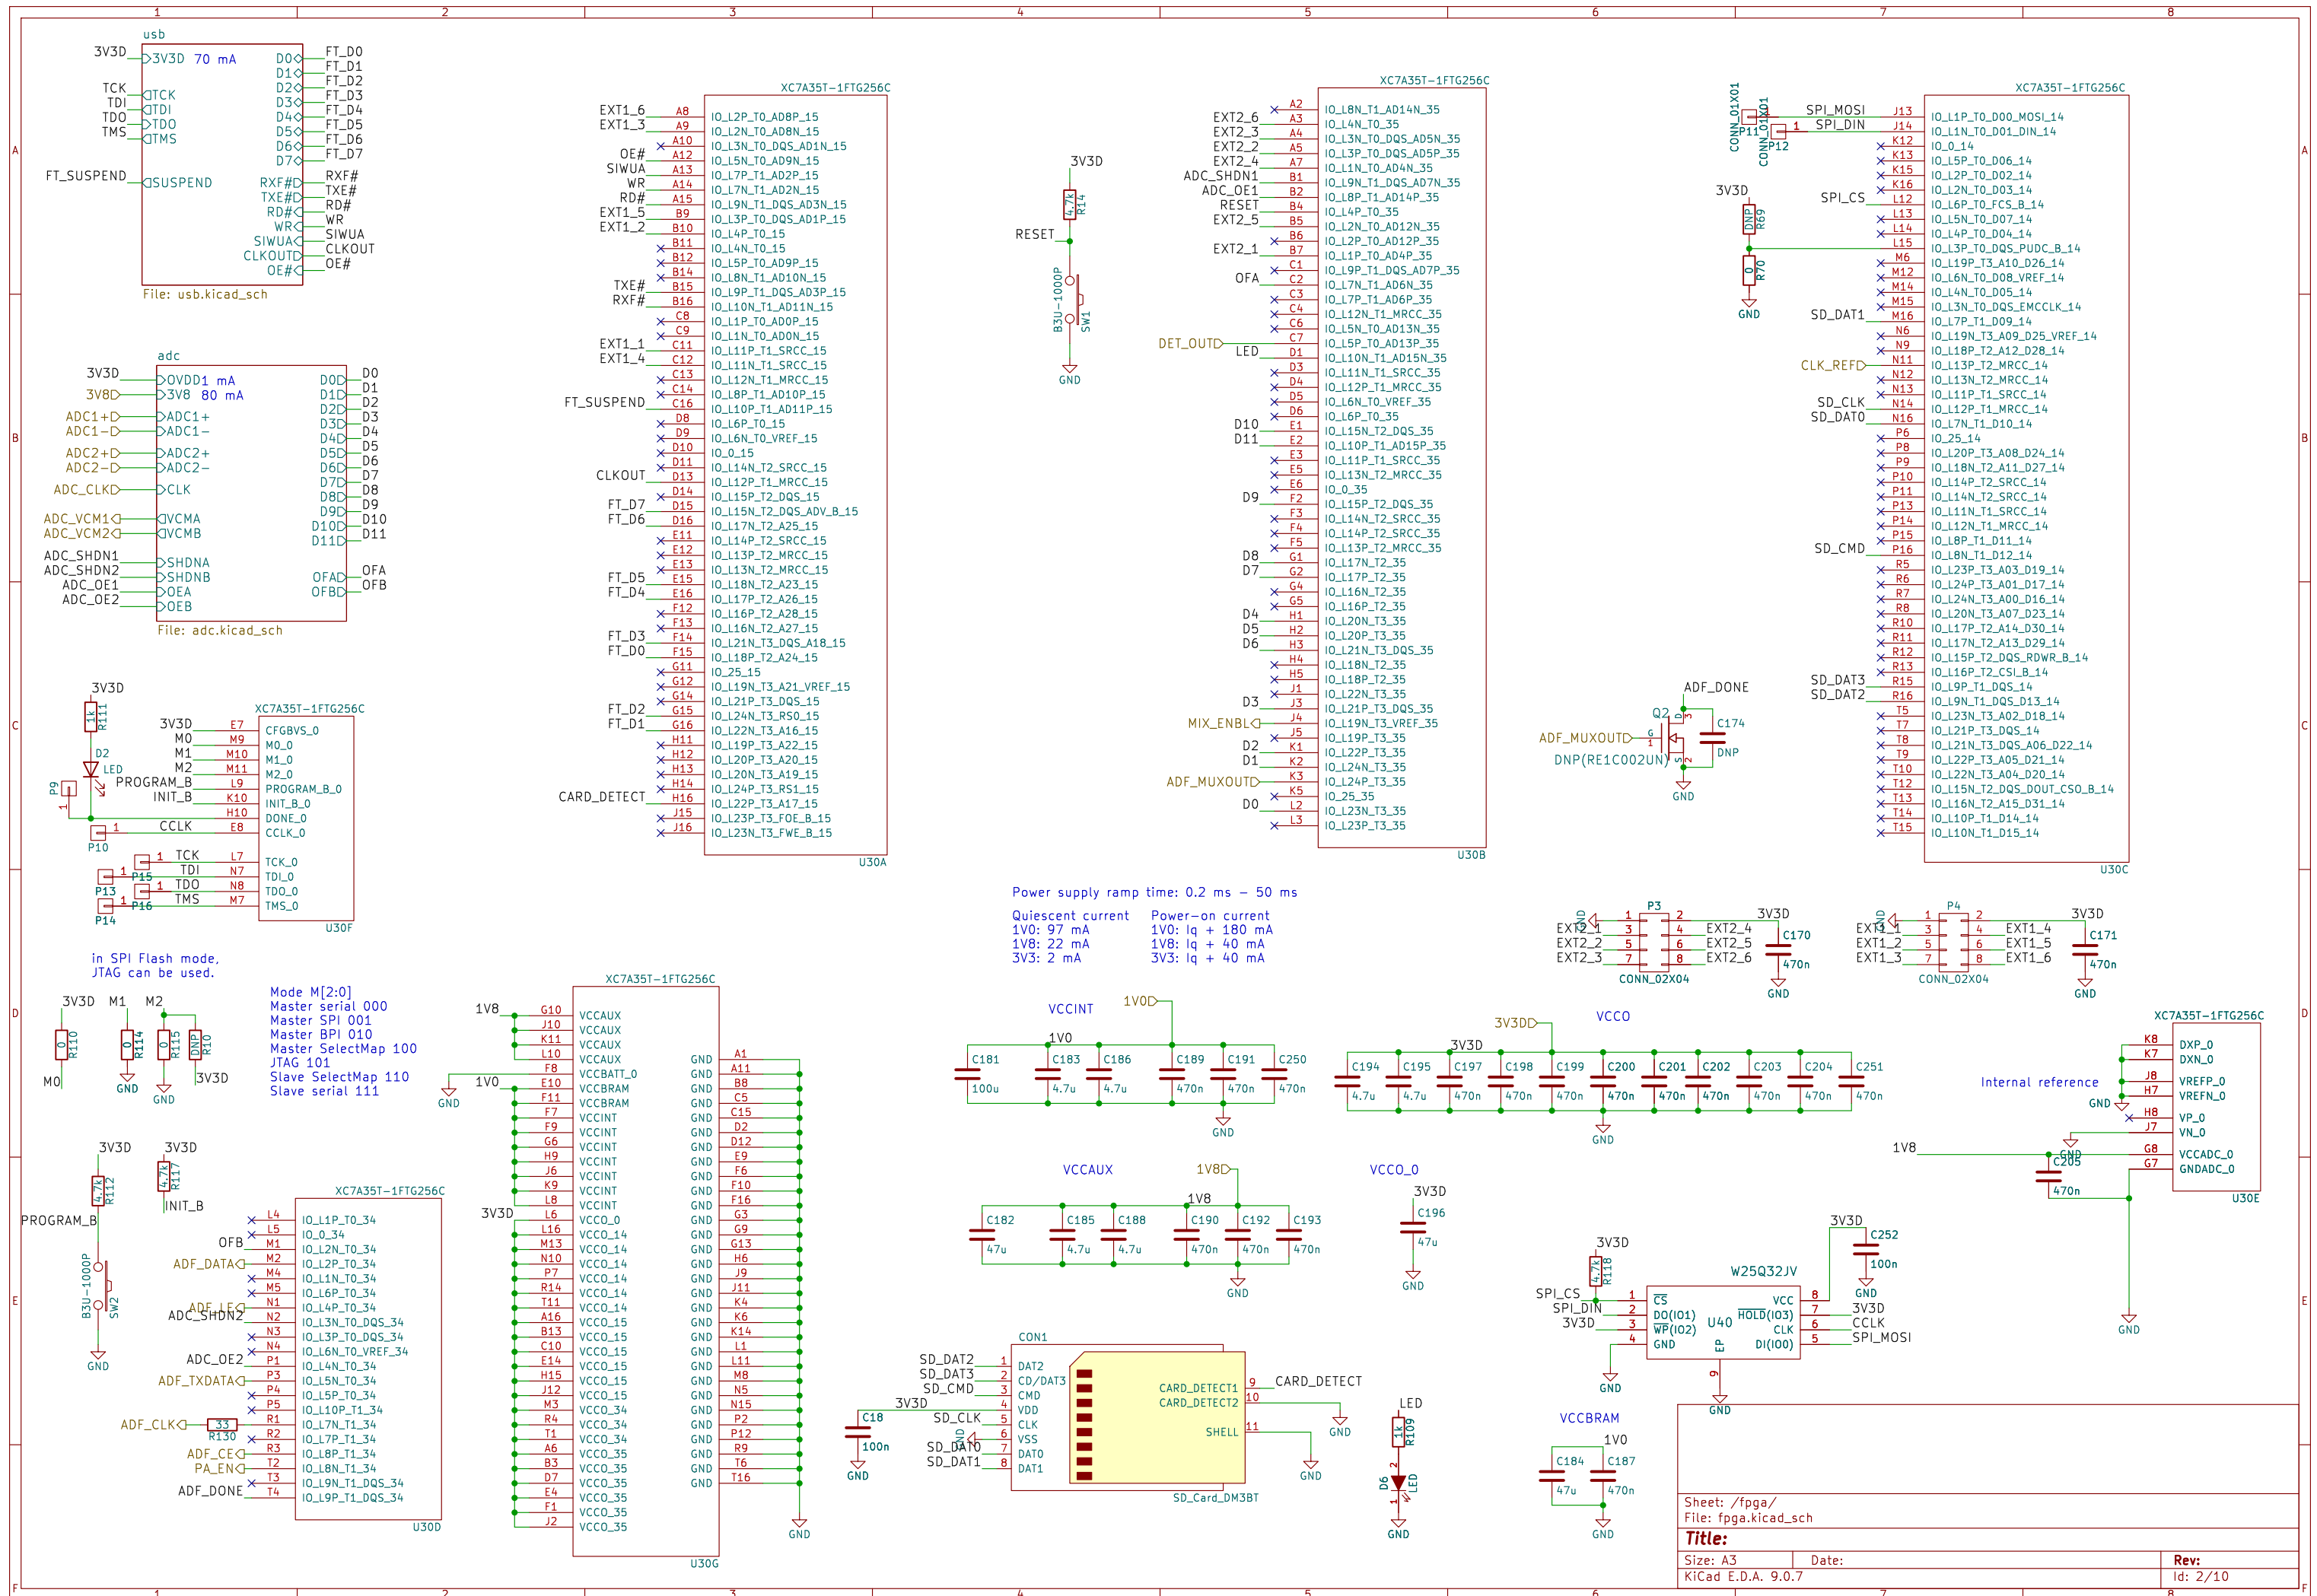






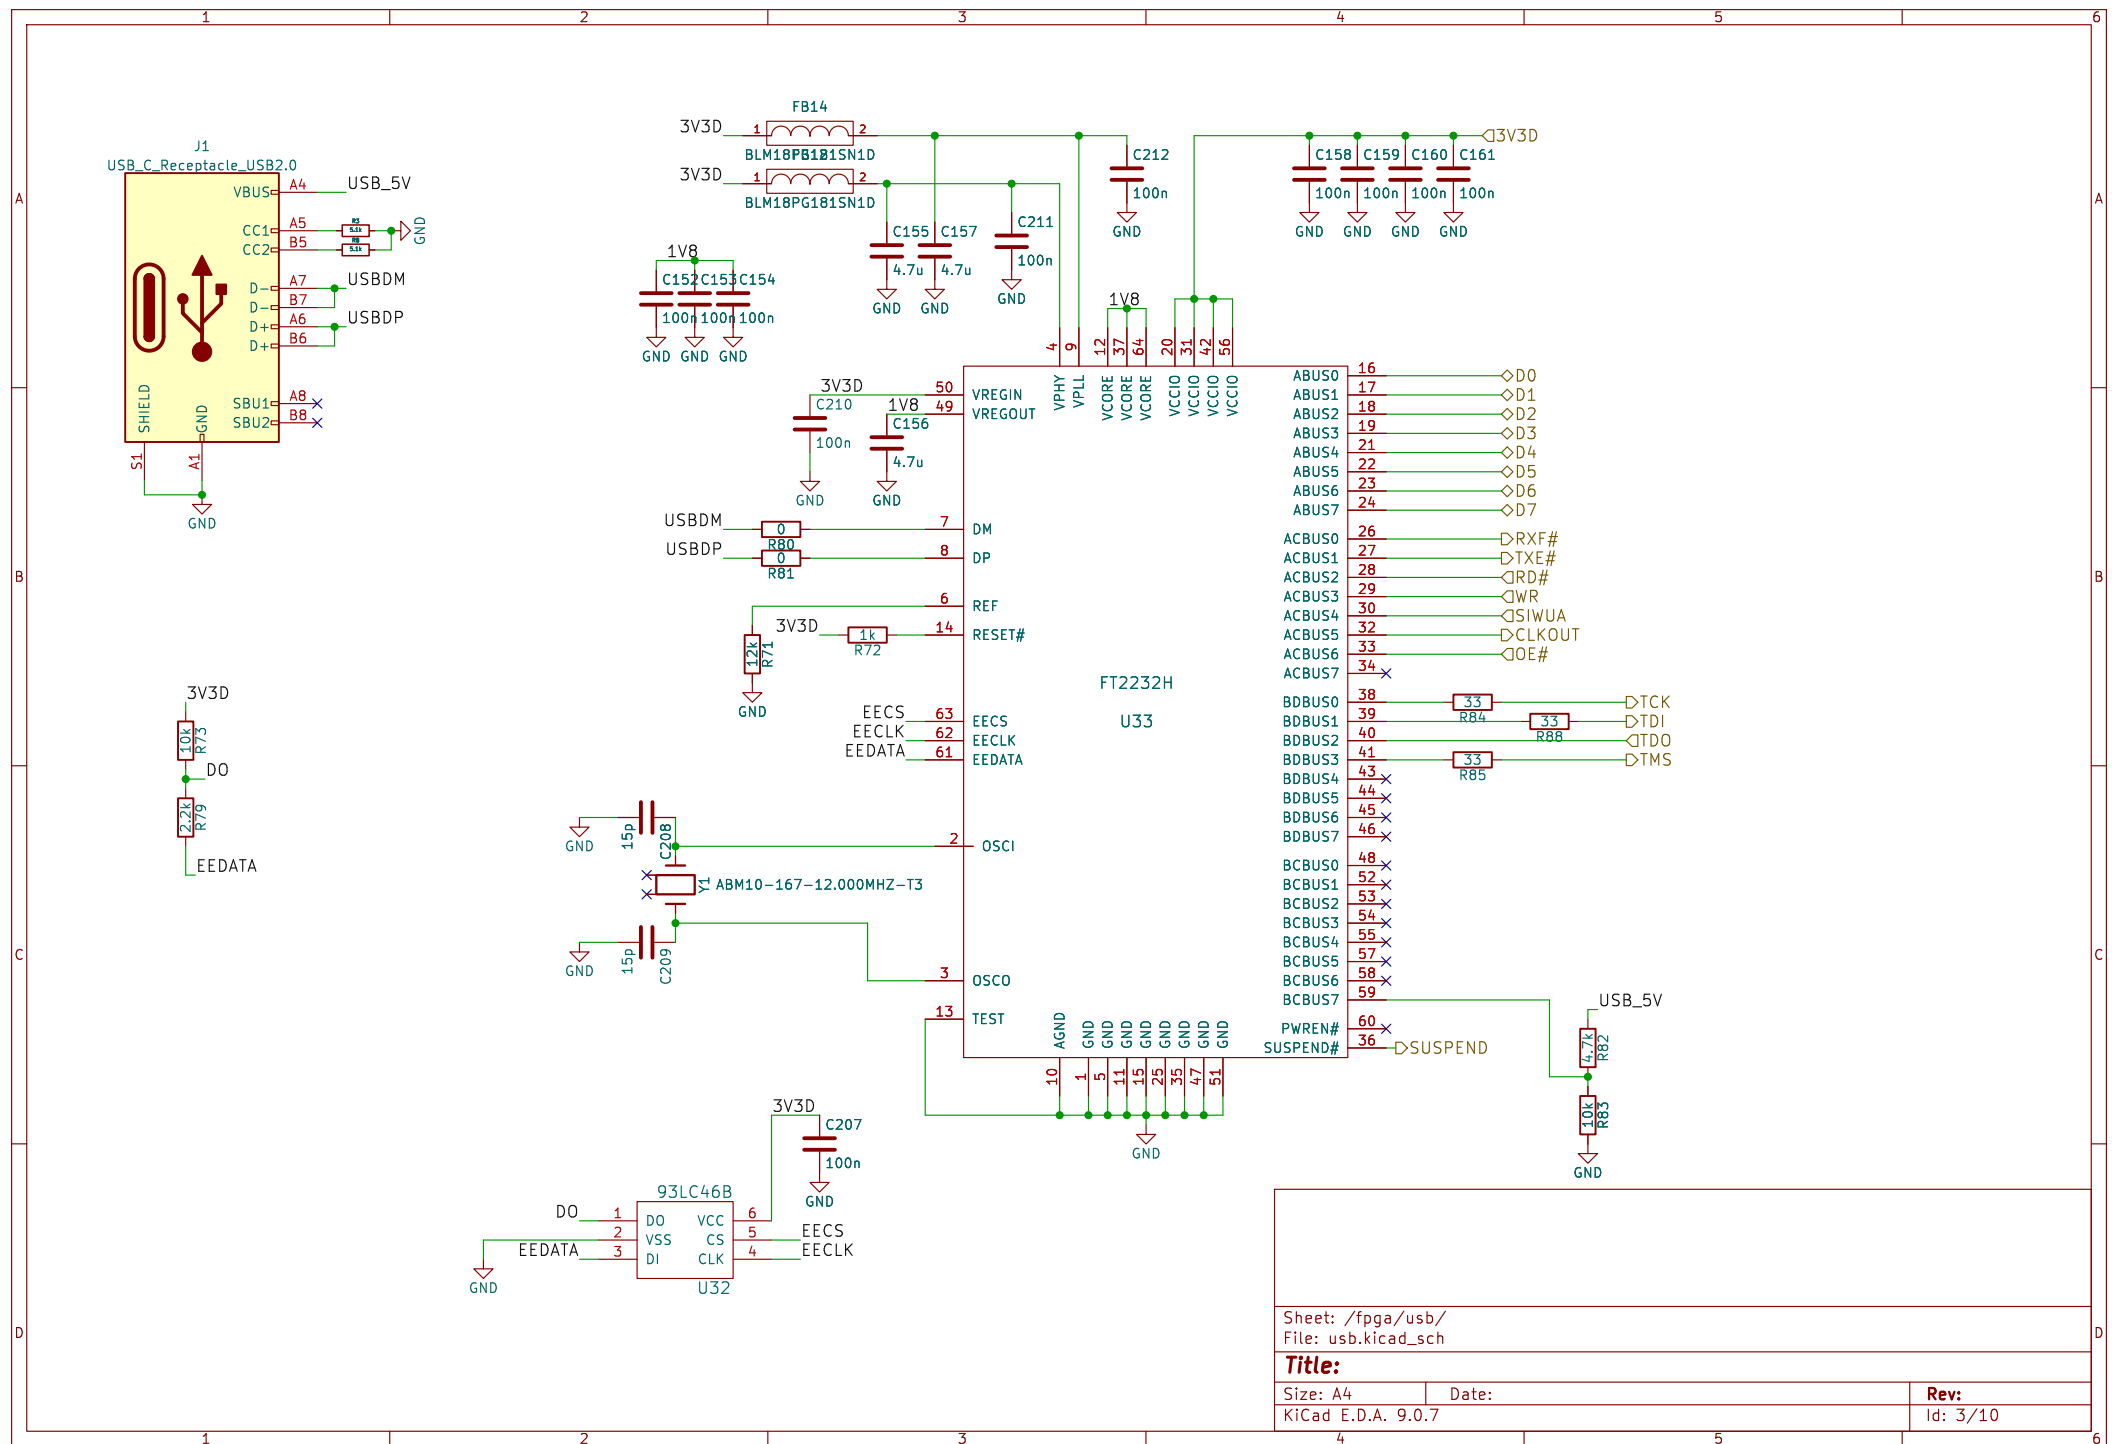


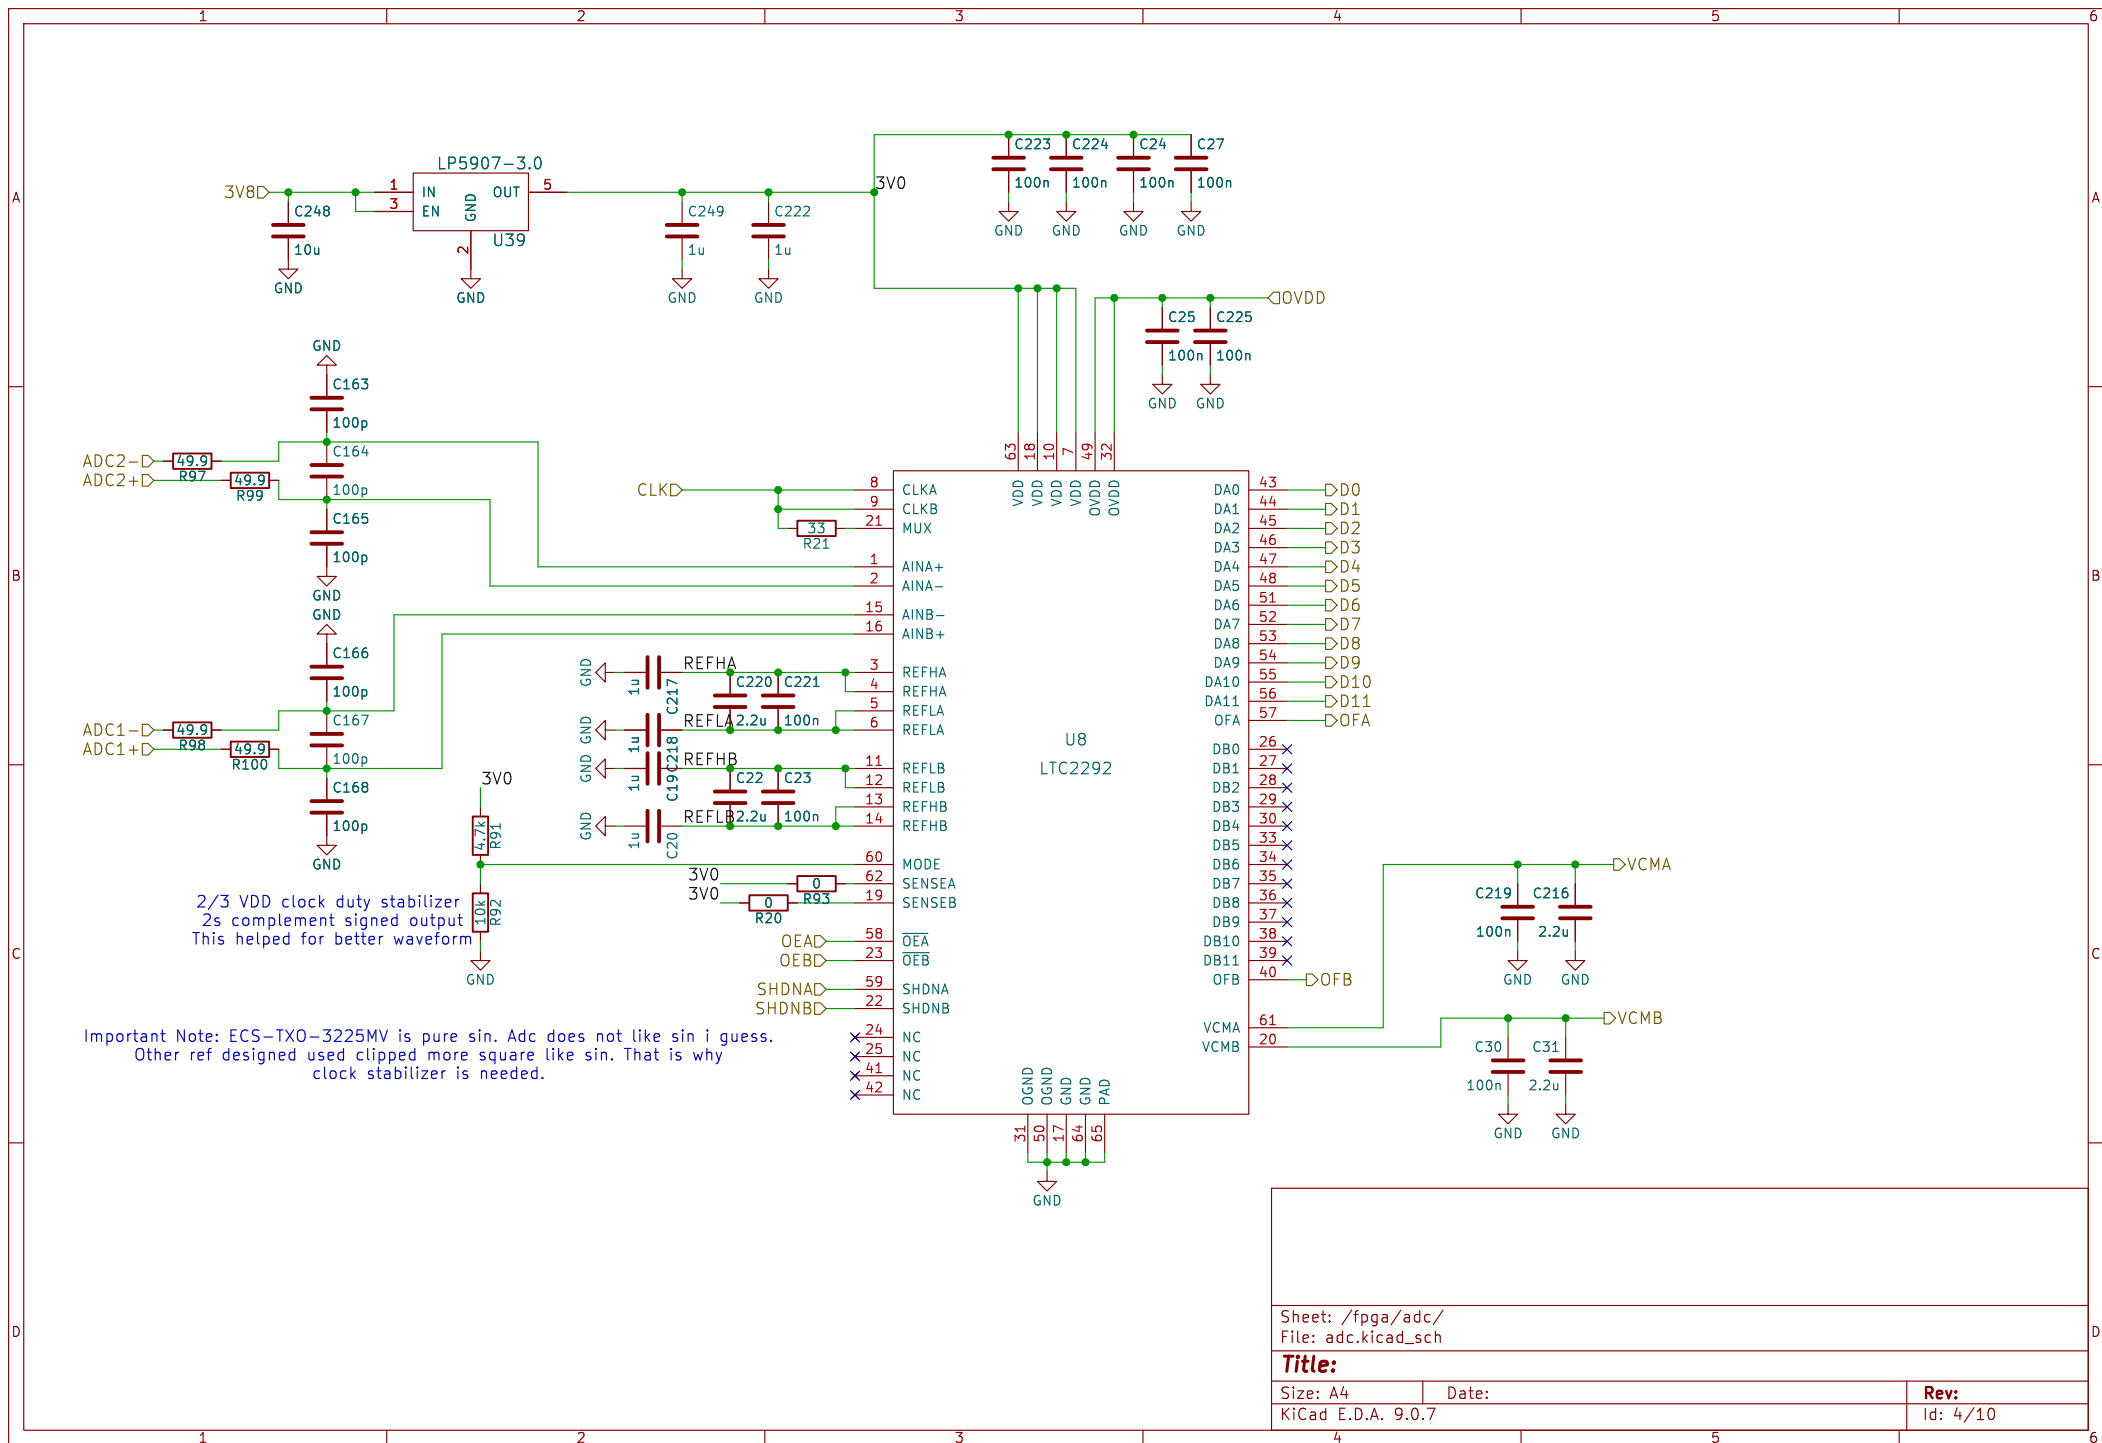

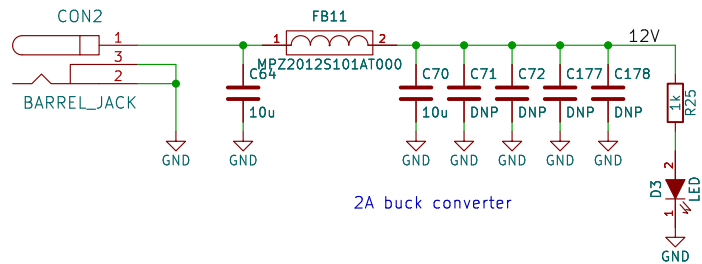


2A buck converter


In the Artix-7 data sheet it states that the recommended power-on sequence is VCCINT, VCCBRAM, VCCAUX, and VCCO. 1v0 first 1v8 then 3v3 is the sequence so use power good

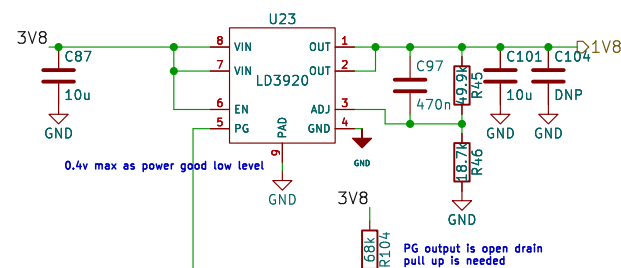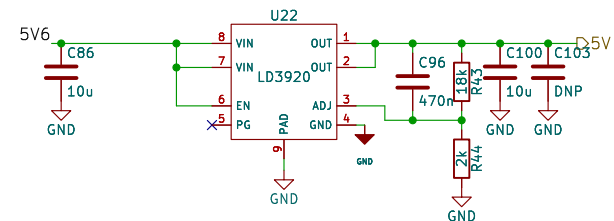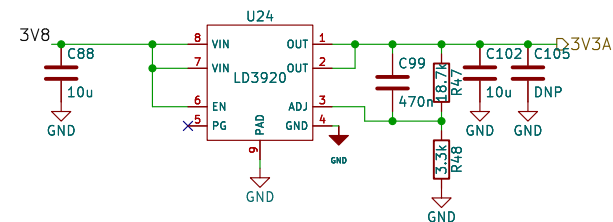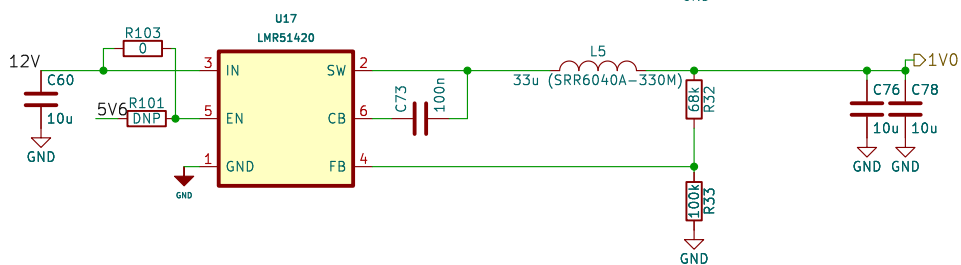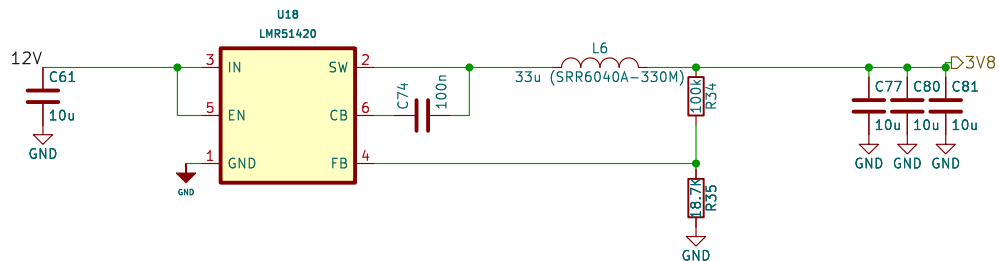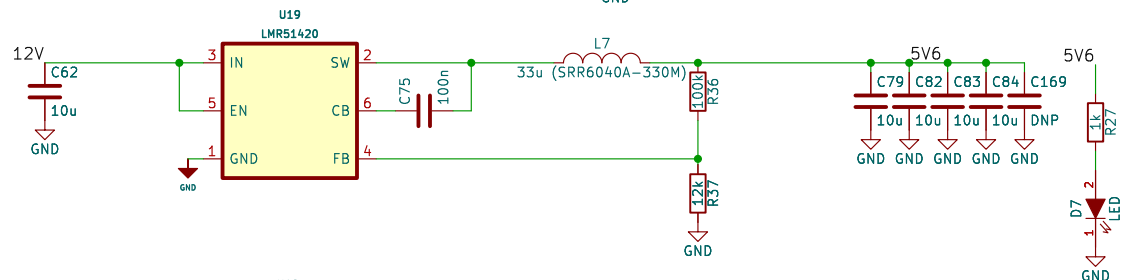

0.4v max as power good low level
PG output is open drain pull up is needed

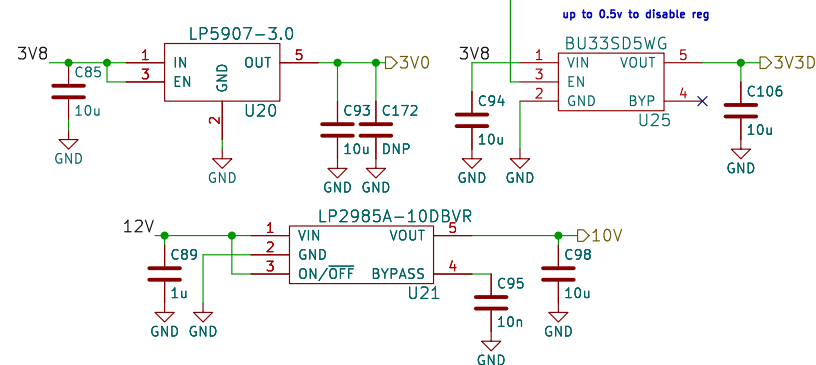

up to 0.5v to disable reg

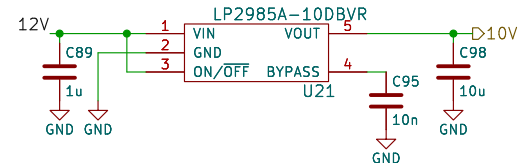

Sheet: /power/
File: power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 9.0.7

Date:

Rev:

Id: 5/10

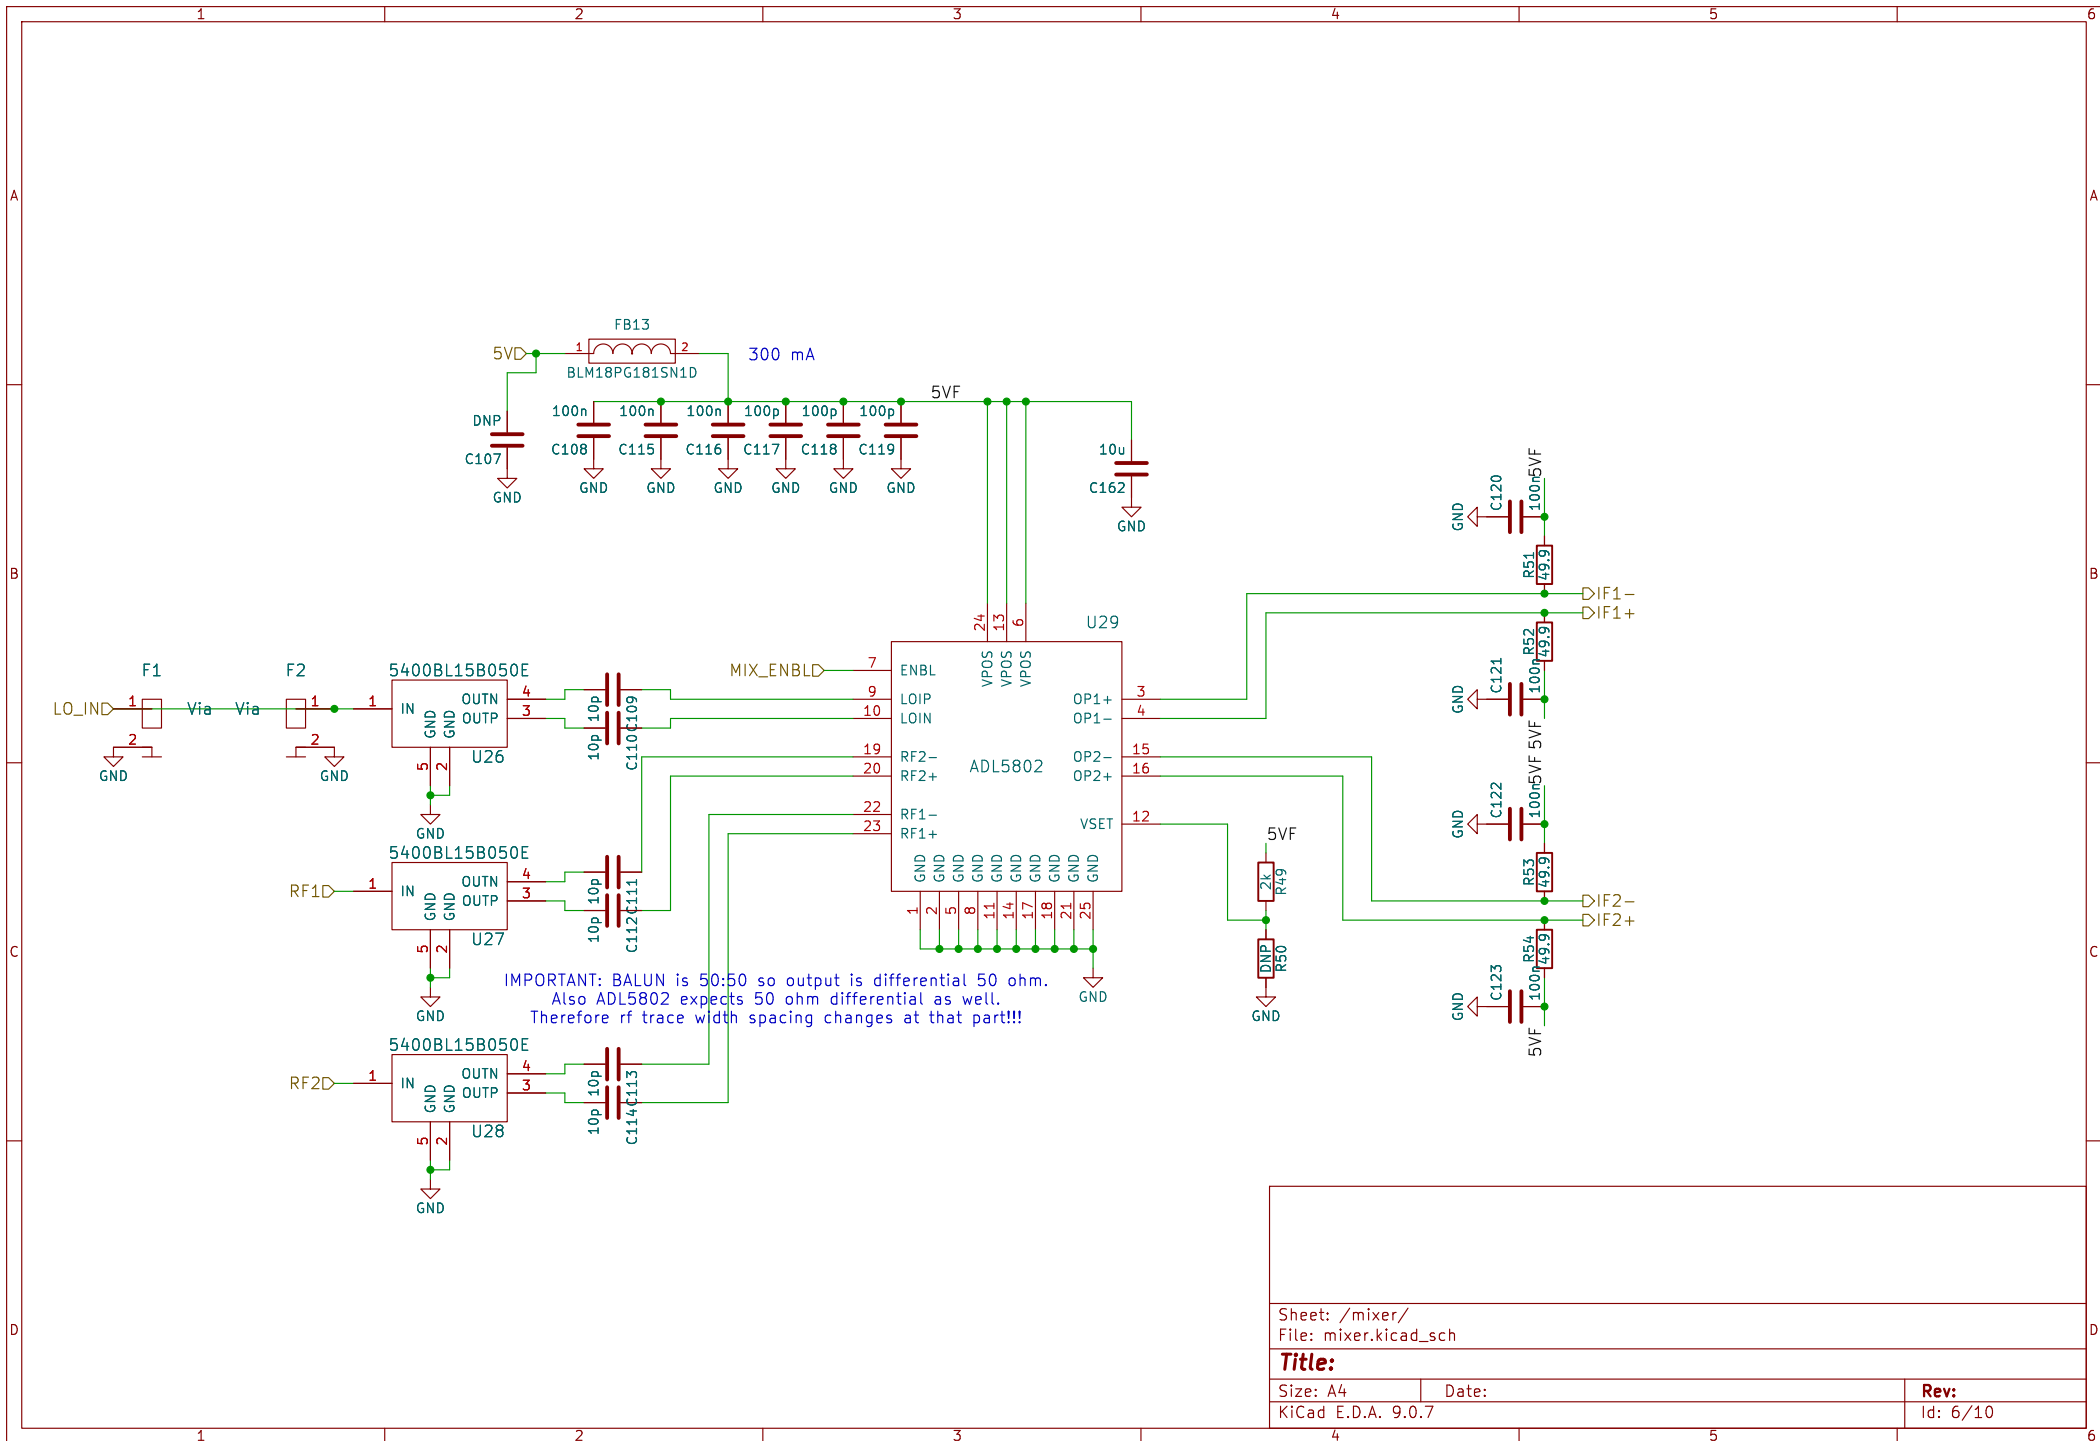

Sheet: /mixer/
File: mixer.kicad_sch

Title:


Size: A4


Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 6/10

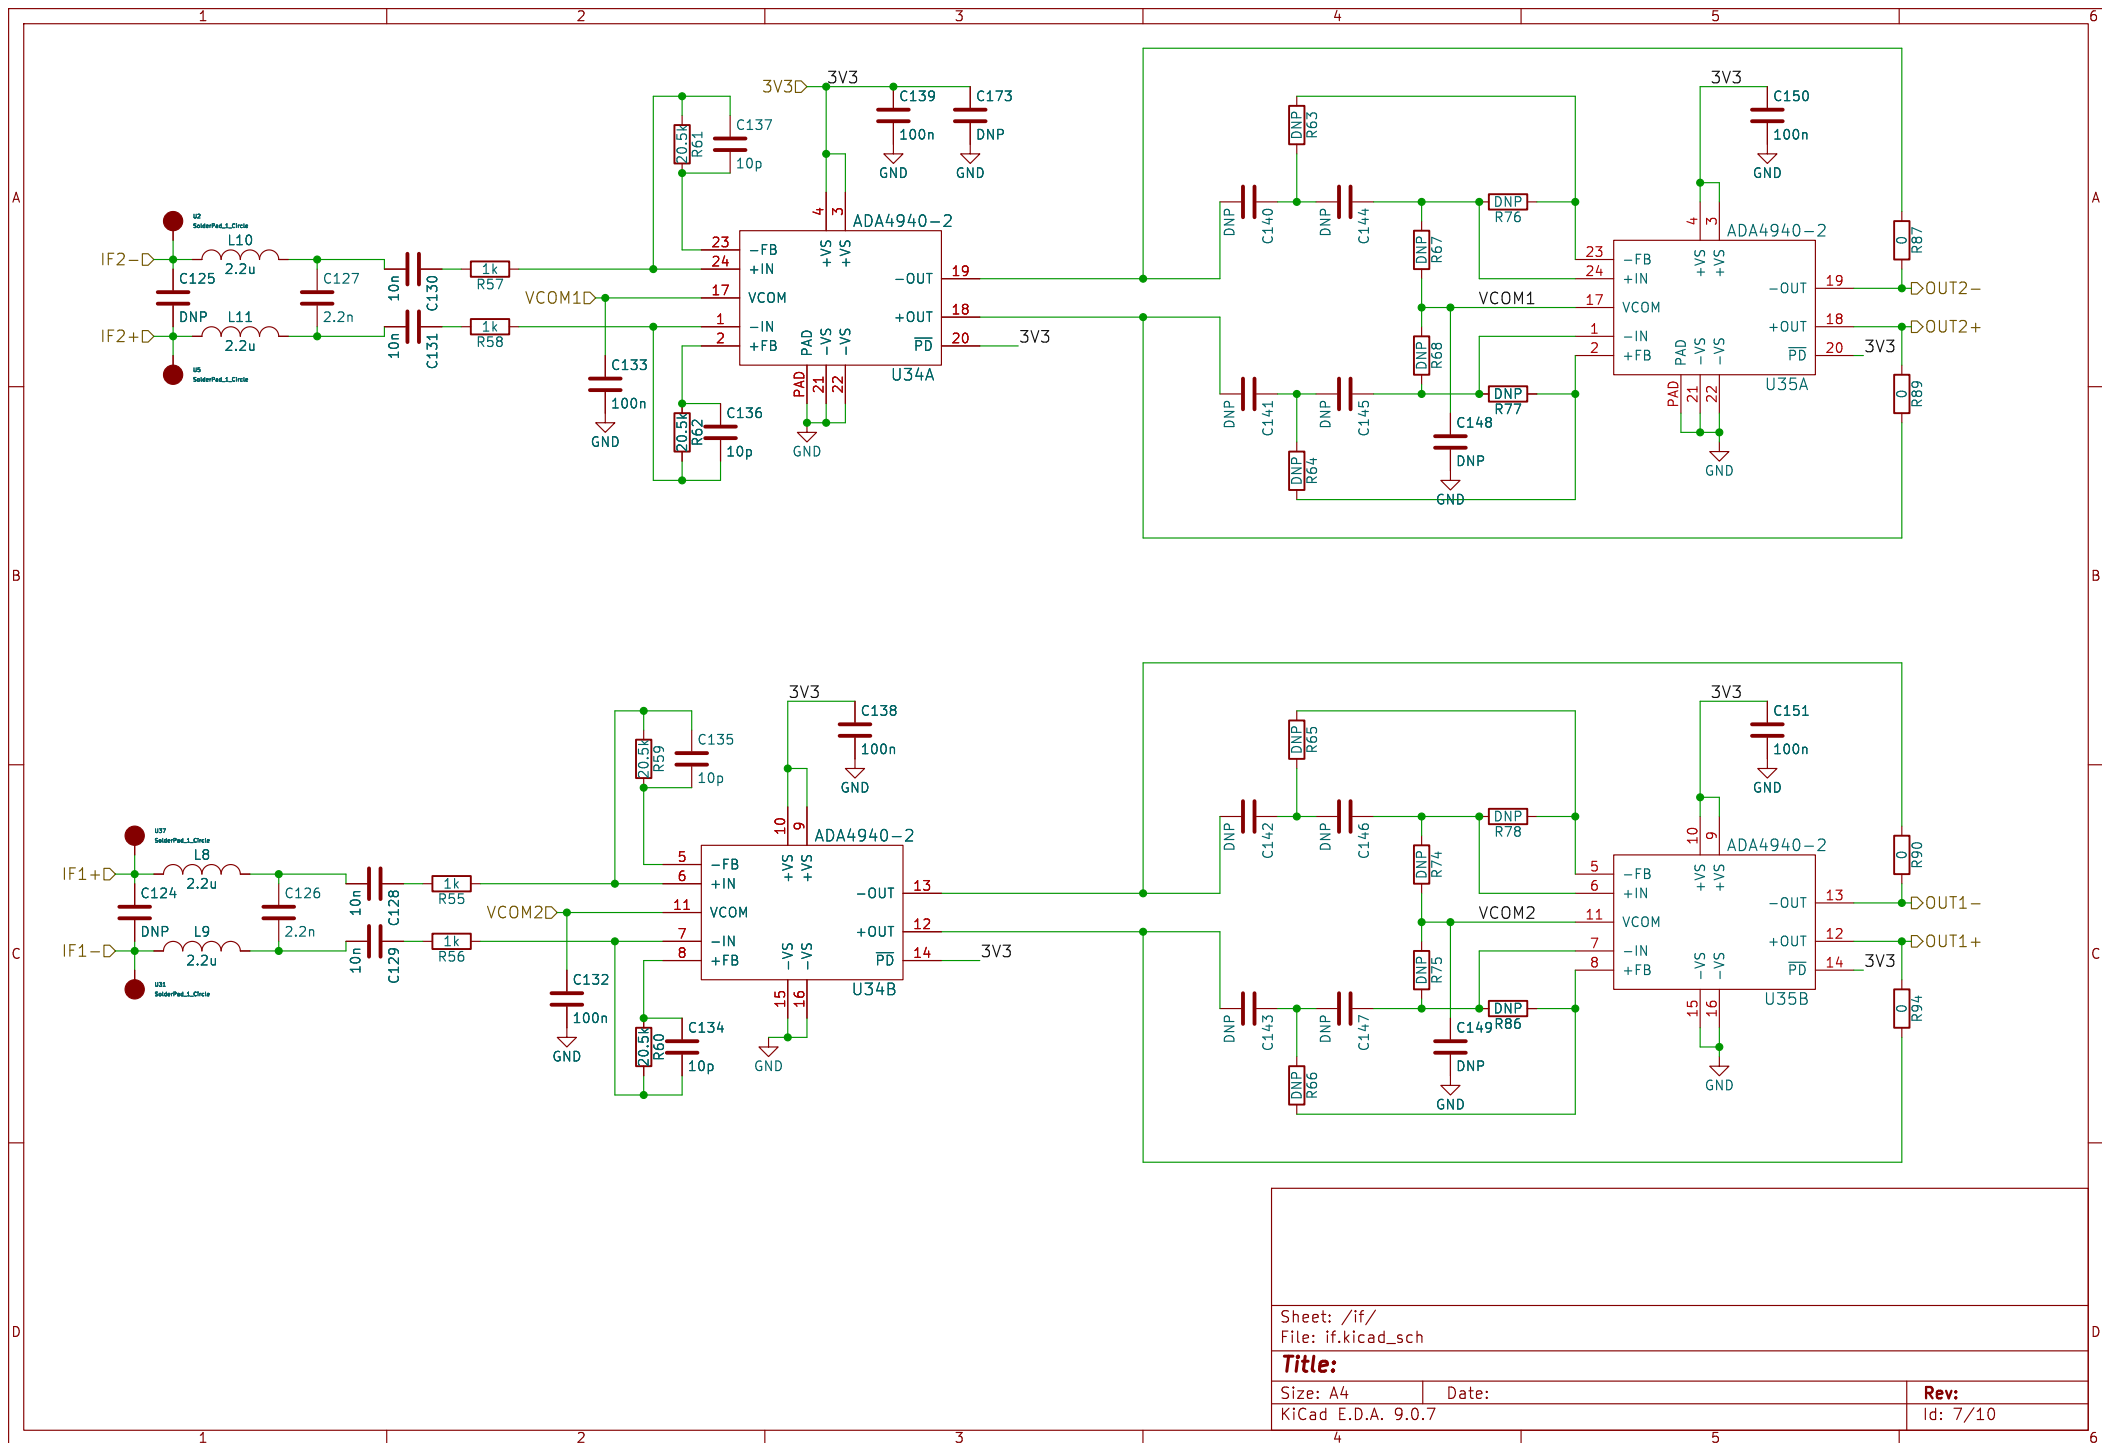

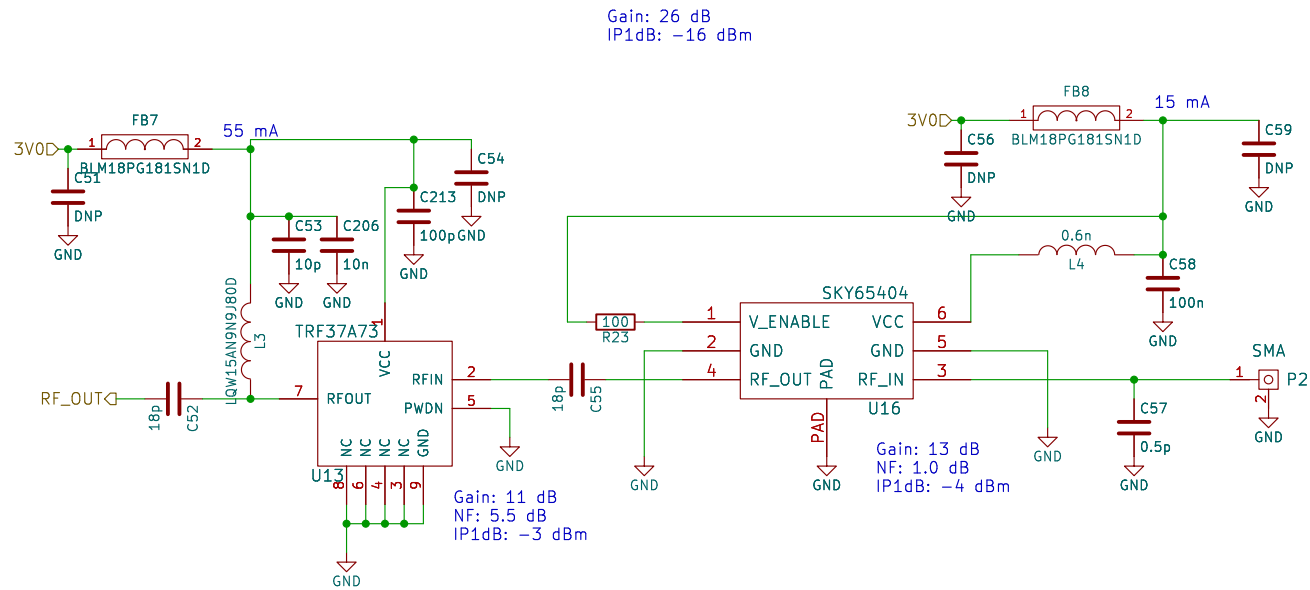

Sheet: /rx2/
File: rx.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 10/10