


Buck_Boost

Rev:

2026-07-23 17:02:12

	Sour ced	Plac ed	References	Value	Footprint	Quan tity
1	☐	☐	C4, C5, C7	0.1u	C_Radial_D5.0mm _H7.0mm_P2.00mm	3
2	☐	☐	C1, C2	10u	C_Radial_D5.0mm _H7.0mm_P2.00mm	2
3	☐	☐	C3, C6	1u	C_Radial_D5.0mm _H7.0mm_P2.00mm	2
4	☐	☐	R2, R3	15	R_Axial_DIN0207 _L6.3mm_D2.5mm _P7.62mm_Horizon tal	2
5	☐	☐	L1	122u	L_1206_3216Metr ic_Pad1.22x1.90 mm_HandSolder	1
6	☐	☐	U2, U3	UCC2728 9D	SOIC_289D_TEX	2
7	☐	☐	U1	AVR16EB 14-I/SL	SOIC14_SL_MCH	1
8	☐	☐	TP1, TP2, TP3, TP4, TP5	TestPoi nt	TestPoint_Keyst one_5000-5004_M iniature	5
9	☐	☐	Q1, Q2, Q3, Q4	IRF540N	T0-220-3_Vertic al	4
10	☐	☐	J1, J2, J4	Screw_T erminal _01x02	TerminalBlock_P hoenix_MKDS-1,5 -2-5.08_1x02_P5 .08mm_Horizonta l	3
11	☐	☐	J3	Conn_01 x03_Pin	PinHeader_1x03_ P2.54mm_Vertica l	1

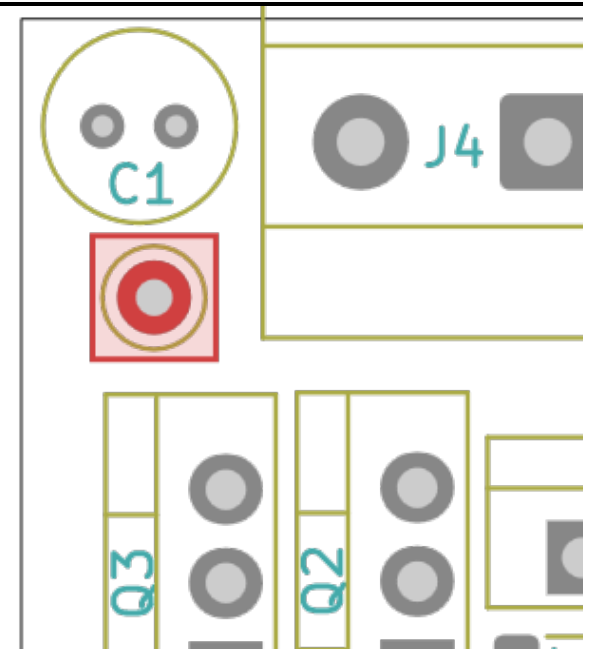

Dev: Christopher Gardner
Version 1.0
Synchronous DC-Dc Buck-Boost Conv

