



a) Direct deform




b) Connect & Disconnect

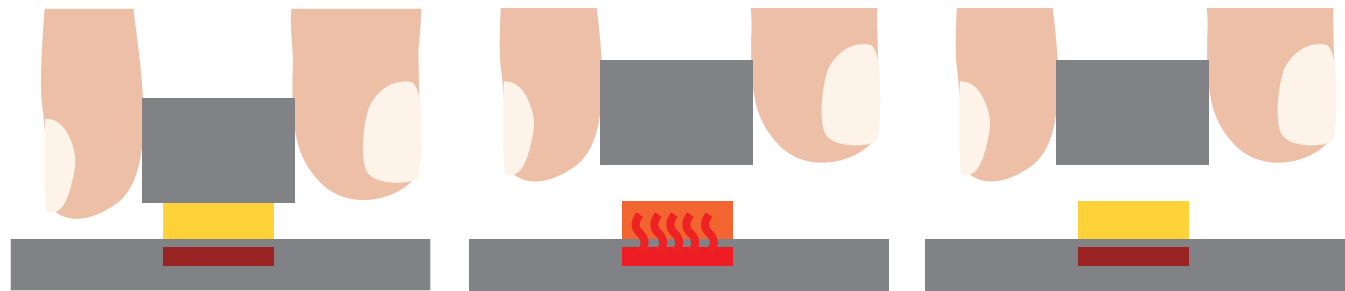

c) Structure modification

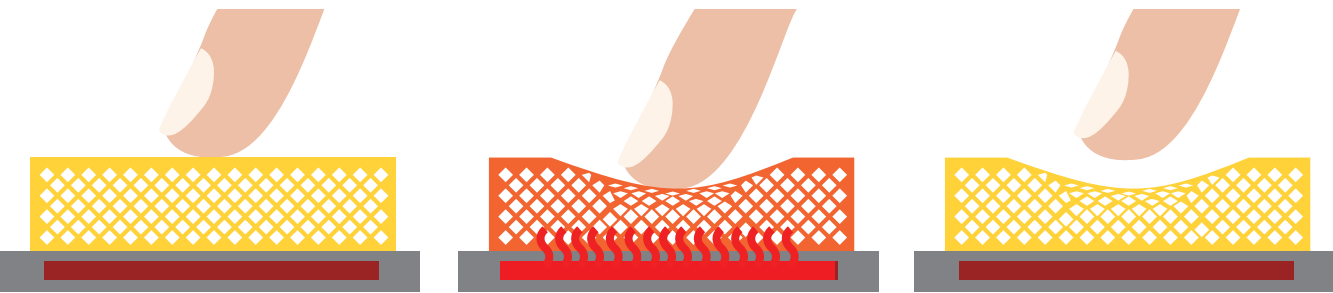

d) Locking Mechanical Structures

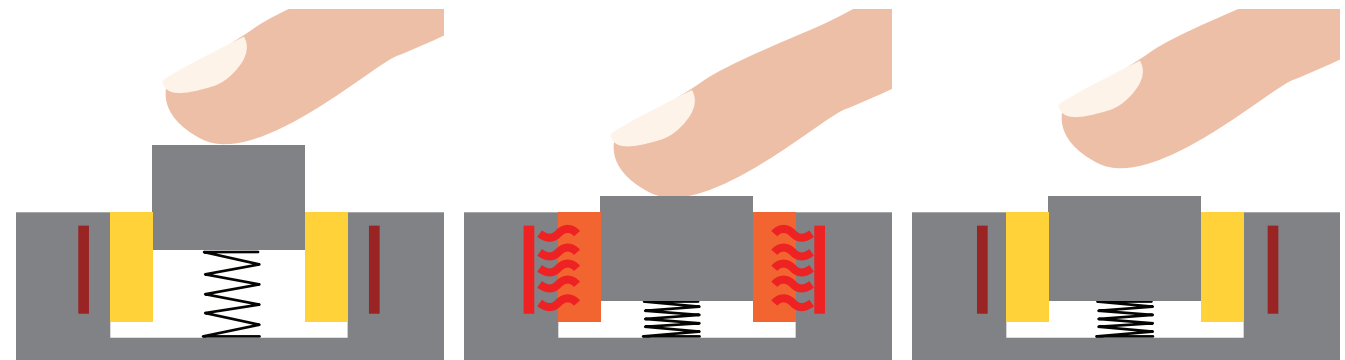

moldable structure: ~25° C >60° C heat: 