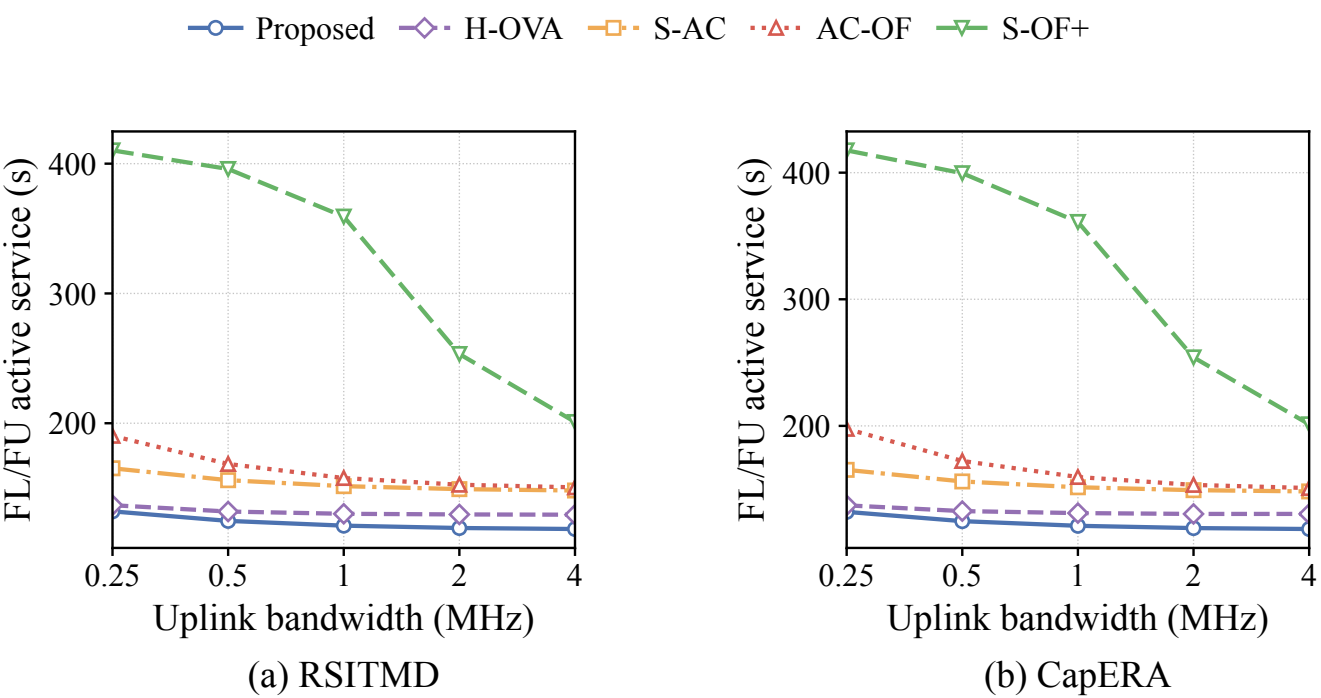
Proposed
H-OVA
S-AC
AC-OF
S-OF+
FL/FU active service (s)
400
300
200
0.25
0.5
1
2
4
Uplink bandwidth (MHz)
(a) RSITMD
FL/FU active service (s)
400
300
200
0.25
0.5
1
2
4
Uplink bandwidth (MHz)
(b) CapERA