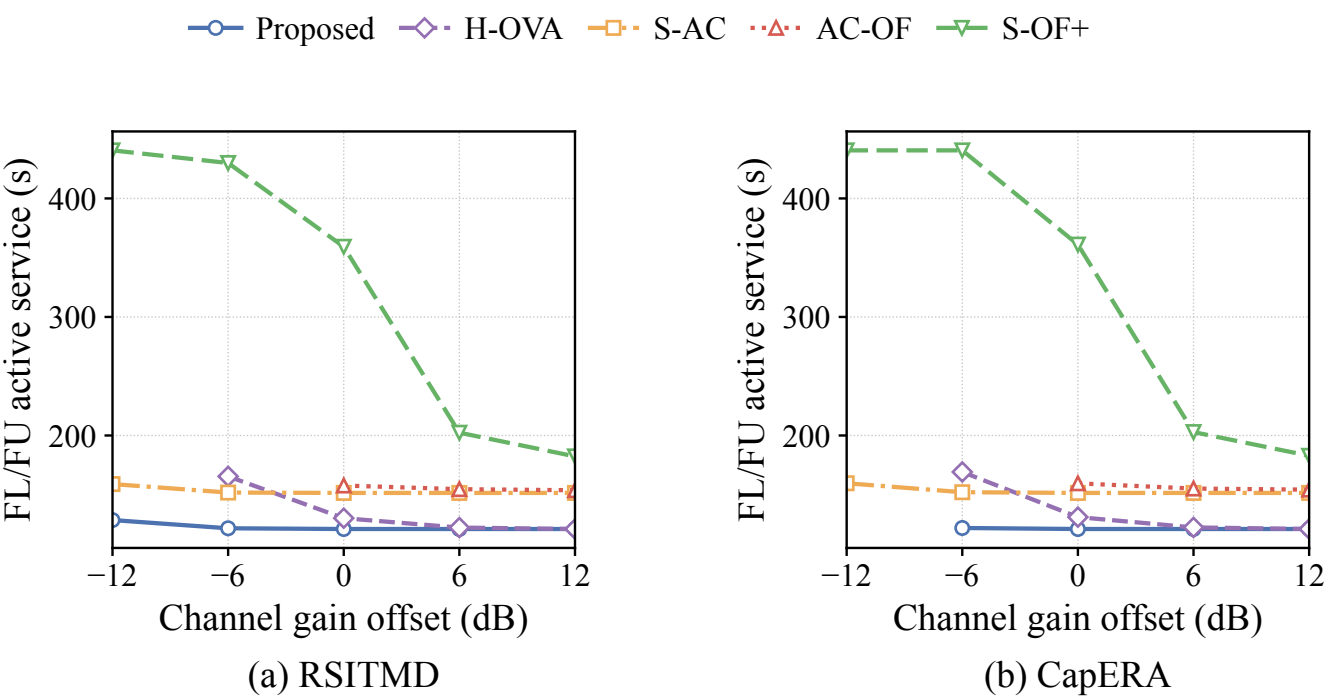
Proposed
H-OVA
S-AC
AC-OF
S-OF+
FL/FU active service (s)
400
300
200
−12
−6
0
6
12
Channel gain offset (dB)
(a) RSITMD
FL/FU active service (s)
400
300
200
−12
−6
0
6
12
Channel gain offset (dB)
(b) CapERA