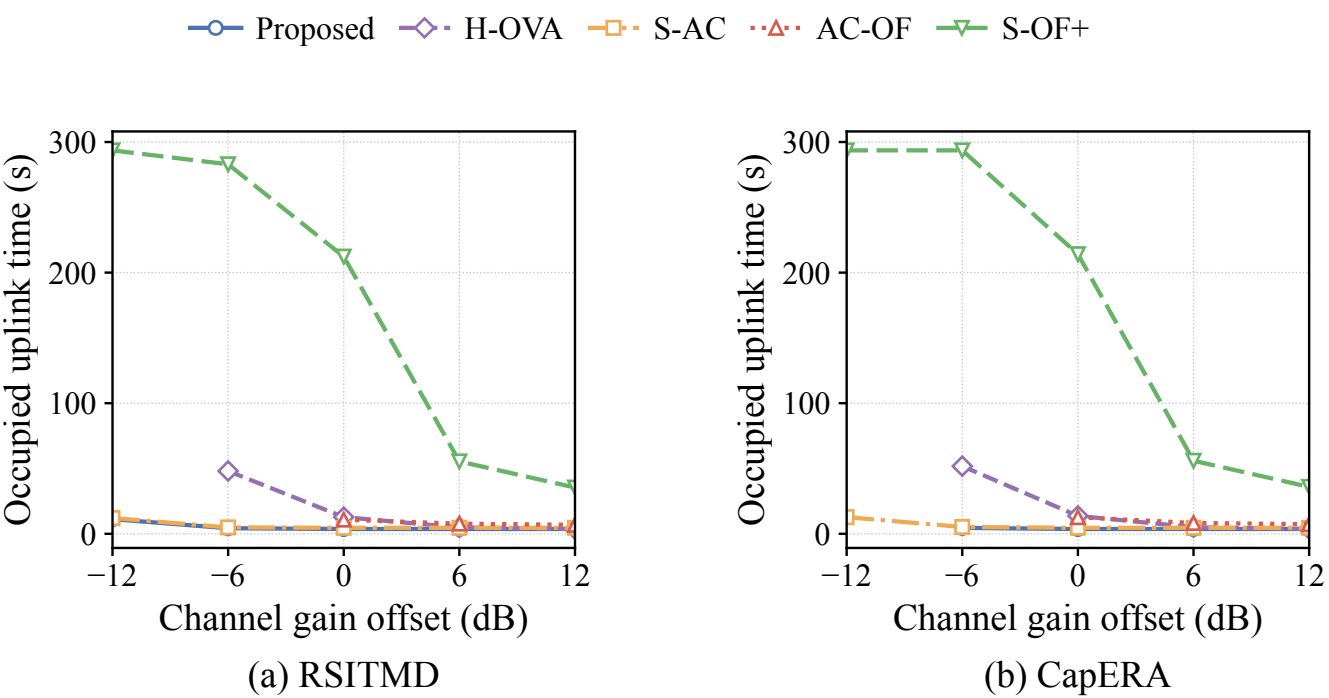
Proposed
H-OVA
S-AC
AC-OF
S-OF+
Occupied uplink time (s)
300
200
100
0
−12
−6
0
6
12
Channel gain offset (dB)
(a) RSITMD
Occupied uplink time (s)
300
200
100
0
−12
−6
0
6
12
Channel gain offset (dB)
(b) CapERA