



Release Notes for Xiegu X6200 firmware V1.0.6 as of 2025-01-14

January 15th 2025

Table of contents

About Radioddity	3
1 Firmware release notes	4
1.1 <i>Operating System V1.0.6 & firmware V1.0.6 as of January 14th, 2024.....</i>	<i>4</i>
1.2 <i>Operating System V1.0.5 & firmware V1.0.5</i>	<i>5</i>
1.3 <i>Operating System V1.0.4 & firmware V1.0.4</i>	<i>5</i>
1.4 <i>Operating System V1.0.3 & firmware V1.0.3 as of September 24th, 2024</i>	<i>6</i>
1.5 <i>Operating System V1.0.2 & firmware V1.0.2</i>	<i>6</i>
1.6 <i>Operating System V1.0.1 & firmware V1.0.1 as of August 1st, 2024.....</i>	<i>7</i>
1.7 <i>Operating System V1.00 & firmware V1.00</i>	<i>7</i>
2 Updating the Xiegu X6200 firmware	8
2.1 <i>Preparing the microSD memory card</i>	<i>8</i>
2.1.1 <i>Writing the Xiegu X6200 firmware to the microSD card</i>	<i>9</i>
2.2 <i>Updating the Xiegu X6200 operating system (APP)</i>	<i>13</i>
2.3 <i>Updating the firmware of the Xiegu X6200 (FIRMWARE).....</i>	<i>16</i>
3 Where to find further information?	20
3.1 <i>Xiegu-X6200 group on groups.io.....</i>	<i>20</i>
3.2 <i>Radioddity support area.....</i>	<i>20</i>

About Radioddity

‘You, our friend and customer, are our focus’

At Radioddity, our customers are important to us. As a customer, your time and money are important to you. When you buy radios online, you face a dilemma: buy from a reputable website at a high price, or try to save money by choosing a retailer that may not offer quality goods, service or advice. At Radioddity.com, you don't have to choose between low prices and a safe shopping experience. Whether you are a first-time shopper or an experienced radio amateur, we always do our utmost to ensure that you get the best possible value for money. Over the past few years, Radioddity has continuously strived to better meet the needs of wireless equipment buyers and has become a reliable partner. We do this by offering the highest quality products at an affordable price and by providing you with first-class support after purchase as well as out of warranty. Because as our customer, you deserve nothing less.

Our promise: To offer you the best shopping experience

Strong partnerships enable us to offer you the latest technologies with an excellent price/performance ratio under the Radioddity brand name. Our experienced and responsive customer service team helps us to deliver on our promise to you and better meet your everyday needs. Whether it's offering you the latest and greatest DMR, HF and analog radios, accessories and related products, providing outstanding technical support or working with amateur radio industry leaders to develop helpful content to assist you with your purchase: Your concern is our concern. We want to provide you with quality radios at great prices. If you feel we are not delivering on this promise in any way, please let us know by e-mail:

support@radioddity.com

Copyright© 2025 by Radioddity

All rights reserved. This manual or any part of it may not be reproduced or used in any way without written permission from the publisher, except for brief quotations in critical reviews and for certain other non-commercial uses permitted by copyright law. For permission requests, please contact the publisher.

Windows™, Linux™ and OS X™ are trademarks of their respective owners. If a trademark assignment is missing, incorrect or erroneous, please contact us as soon as possible so that we can correct this immediately.

1 Firmware release notes

The following tables list the details that have been changed with new versions of the Xiegu X6200 software. Generally previous updates are included in the latest version.

Note: *Never update your radio if it is not really necessary, or in other words: **Don't fix it if it's not broken!** This cannot be emphasized often enough. To update the Xiegu X6200, only use the software that you can find on our support pages. Before carrying out an update, make sure that the release package is still available for download on our support page. All software updates for the Xiegu X6200 are supplied with 'Release Notes'.*

Please carefully read the 'Release Notes' and all documents contained in the firmware archives!

1.1 Operating System V1.0.6 & firmware V1.0.6 as of January 14th, 2024

Revision	Changes	Released
APP 1.0.6 Jan 14 2025 14:13:28	- Updated default values for 'BUILT-IN MIC GAIN' and 'HANDLE MIC GAIN' (now 30 instead of 0) ^{*)} 'FACTORY RESET' now also deletes any WLAN settings ^{*)} - Network settings now displayed in SYSTEM submenu - More accurate battery gauge - Modulation on AM mode fixed ^{*)} - Audio level/deviation in NFM fixed ^{*)} - NR algorithm optimized - The old CW decoder function, while still currently in place under the '[APP]' → 'MODEM' submenu, will be removed soon. A new and improved option is now available under the second 'KEY' submenu. Added two new parameters for CW decoding on page #2 of the KEY function. When 'CW DECODER' has been turned 'ON', the decoded text will scroll from right to left and will be displayed at the bottom of the waterfall diagram. Using the outer ring of the MFK-knob, the 'CW Decoding Threshold' can be adjusted. If the ambient noise is relatively high (e.g., S9+), it is advisable to set a value between 15 and 30. If, on the other hand, the ambient noise is relatively low, it is advisable to set it to a value between about 5 and 14. Values between 1 and 50 are possible, so that the best possible decoding rate can be achieved. The parameter	2025-01-15
FIRMWARE 1.0.6 Jan 11 2025 13:46:22		

	'CW THRES' as found within the MODEM submenu will be removed in future software versions. This only works with CW mode selected. • FT8CN now fully supported via the internal Bluetooth module ^{*)} • Added support for the Xiegu WR12 Wide-Band receiver Add-on module. A blue WR12 icon will appear in the upper right corner left to the voltage display whenever the WR12 Add-on is connected to the Xiegu X6200 HOST port. • Changed color of main VFO frequency displayed on screen to a darker dark green (#00C832), which does not glare at night (compared to the former light green #00FF00).	
--	--	--

*) Those improvements have not been mentioned in the original Xiegu release notes.

1.2 Operating System V1.0.5 & firmware V1.0.5

Revision	Changes	Released
1.0.5	<i>Has never been officially released</i>	

1.3 Operating System V1.0.4 & firmware V1.0.4

Revision	Changes	Released
1.0.4	<i>Has never been officially released</i>	

1.4 Operating System V1.0.3 & firmware V1.0.3 as of September 24th, 2024

Revision	Changes	Released
APP 1.0.3 Sep 24 2024 20:37:35	- Adjusted the built-in charger algorithm and fixed the problem that the green light still flashes on some machines after the battery already being fully charged. - Fixed the bug that the COMPression switch is inverted (as with V1.0.1). ^{*)} - Adjusted the ALC control algorithm. - Optimized the NR algorithm and improved the noise reduction performance. - Optimized the AGC algorithm and improved the signal-to-noise ratio.	2024-10-14
FIRMWARE 1.0.3 Sep 24 2024 20:35:14	- Fixed the timing bug of the automatic CW key. - Updated DFL filter settings for CW. ^{*)} - Fixed the bug that there is no sound when the CW side tone volume is adjusted to above 63. - Fixed various bugs of the CI-V implementation. - Adjusted the interaction logic of the WLAN submenu for easier use. - Added a 'MEM TO VFO' softkey to the 'MEMORY' submenu for assigning a previously saved channel to the VFO. - Added initial functionality for planned Bluetooth support of mobile phone app FT8CN.	

^{*)} Those improvements have not been mentioned in the original Xiegu release notes.

1.5 Operating System V1.0.2 & firmware V1.0.2

Revision	Changes	Released
1.0.2	<i>Has never been officially released</i>	

1.6 Operating System V1.0.1 & firmware V1.0.1 as of August 1st, 2024

Revision	Changes	Released
APP V1.0.1 Jul 20 2024, 17:22:15	• Adds transceiver audio equalizer • Adds display adjustment options, bandwidth/spectrum/waterfall color, etc. • Adds the spectrum center line switch, the user can choose to turn those on or off • Adds MFK variable step • Adds voice compression • Adds automatic screen backlight dimming/off • Adds CW decoder threshold adjustment • Adds the waterfall map translation switch, the waterfall map will translate with the frequency change after opening • Optimizes frequency spectrum display speed, more smooth	2024-08-01
FIRMWARE V1.0.1 Jul 26 2024, 14:00:49	• Optimizes spectrum and waterfall automatic level, better signal contrast, easier to see clearly • Optimizes the function key operation logic (some switch parameters can be adjusted directly by pressing the button without turning the MFK knob, easy to operate) • Fixes some display content display incomplete issue • Fixes the power alarm bug • Fixes the CW auto key bug • Fixes the transmit power control bug (voice plosive sound, such as "p", "t", etc., is prone to make popping sound)	

This version does replace the version that had been released July 23rd, 2024.

1.7 Operating System V1.00 & firmware V1.00

Revision	Changes	Released
APP V1.0.0 May 30 2024, 10:54:39	• This is the initial version	2024/05/30
FIRMWARE V1.0.0 MAY 29 2024,10:13:38		

2 Updating the Xiegu X6200 firmware

After downloading and unzipping the package, the Xiegu X6200 software is normally updated in three steps:

Step 1: Prepare a microSD memory card

First, prepare a microSD memory card that can be used to upgrade the Xiegu X6200 operating system.

Step 2: Update the Xiegu X6200 operating system (APP)

Update the application software (APP) by booting the radio from the prepared microSD memory card.

Step 3: Update the baseband firmware of the Xiegu X6200 (BASE)

The updated system is started and the SYSTEM/FIRMWARE UPGRADE function used to update the baseband firmware (BASE).

Note: *The Xiegu X6200 must be connected to a stable 13.8V power supply during the entire update process in order to update the firmware. Before you start the update process, turn off the radio and remove the battery pack. After the update has been completed (both steps), turn off the radio again and re-insert the battery pack.*


2.1 Preparing the microSD memory card

You will need:

1. A microSD memory card of at least 4 GB capacity
2. A device to read/write a microSD/flash memory card (if necessary, with an adapter if the device is intended for full-sized SD memory cards)
3. A PC with Windows (7/10/11), Linux or MAC operating system – For these instructions a PC running Windows 11 was used
4. A program to write the Firmware update image to the microSD memory card. On the following pages we use 'Rufus' for this purpose. You can get Rufus at the following URL: <https://rufus.ie/>. Other operating systems such as Linux or MacOS offer similar programs for writing binary images to a microSD memory card, such as balena etcher (<https://etcher.balena.io/>).


2.1.1 Writing the Xiegu X6200 firmware to the microSD card

1. First unpack the firmware update archive into a directory of your choice on your PC.

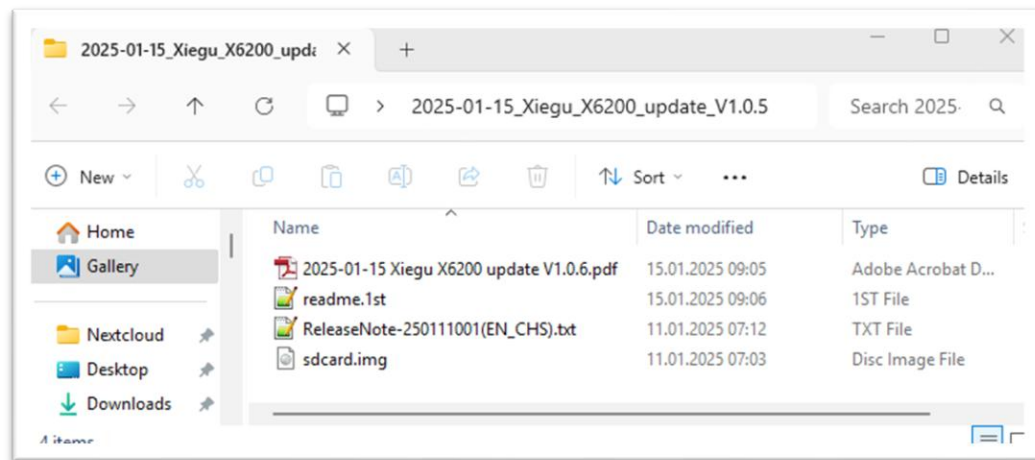


2. Insert an empty microSD memory card (with adapter if needed) into the slot of your PC's read/write device or attached card reader.
3. Start the program 'Rufus' by double-clicking on its executable (exe) file (you will usually find this in the 'Tools' subdirectory of the update archive).

You may first have to confirm a security prompt from your operating system with 'Yes'.

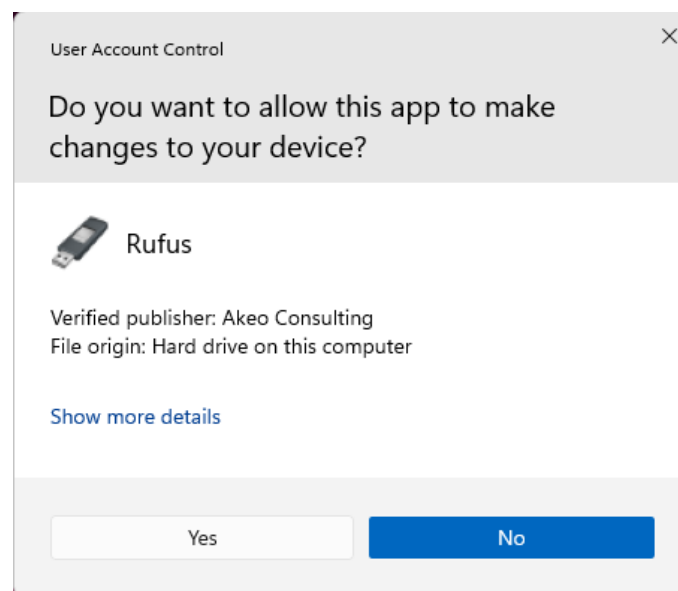


4. You will now see the user interface of the 'Rufus' program.

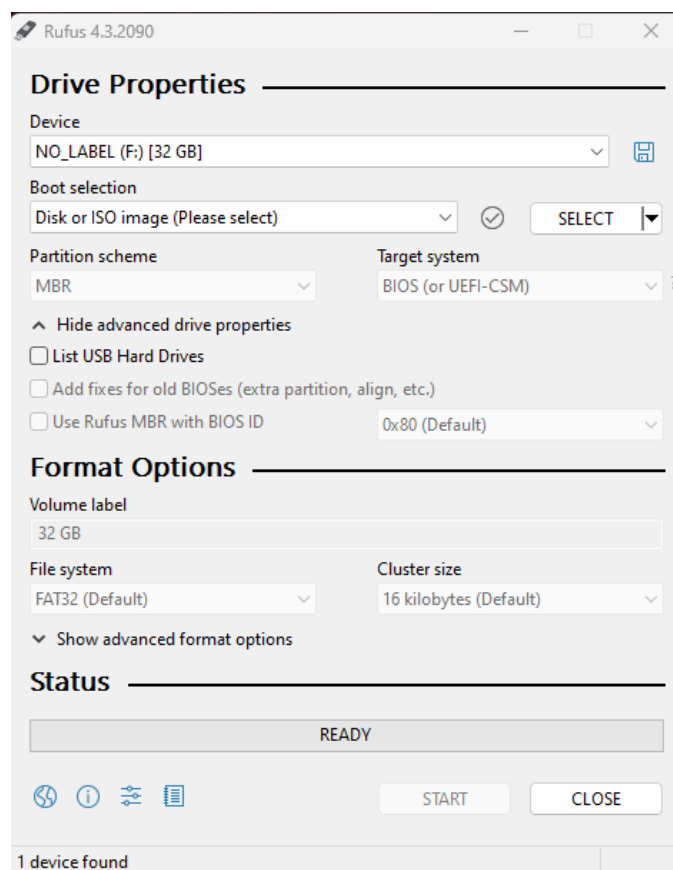

5. Check that the inserted microSD card has been recognized by the program via operating system.



6. Check whether the correct boot type has been selected.




7. Next click on the  button using the left mouse button and navigate to the directory in which you previously unpacked the update archive and then to the corresponding subdirectory of the firmware image file.


Name	Date modified	Type	Size
 sdcard.img	26.12.2024 03:41	Disc Image File	836.608 KB


8. Click on the firmware image file name and then select 'Open'

9. The file name of the firmware file is now displayed under 'Boot selection'.

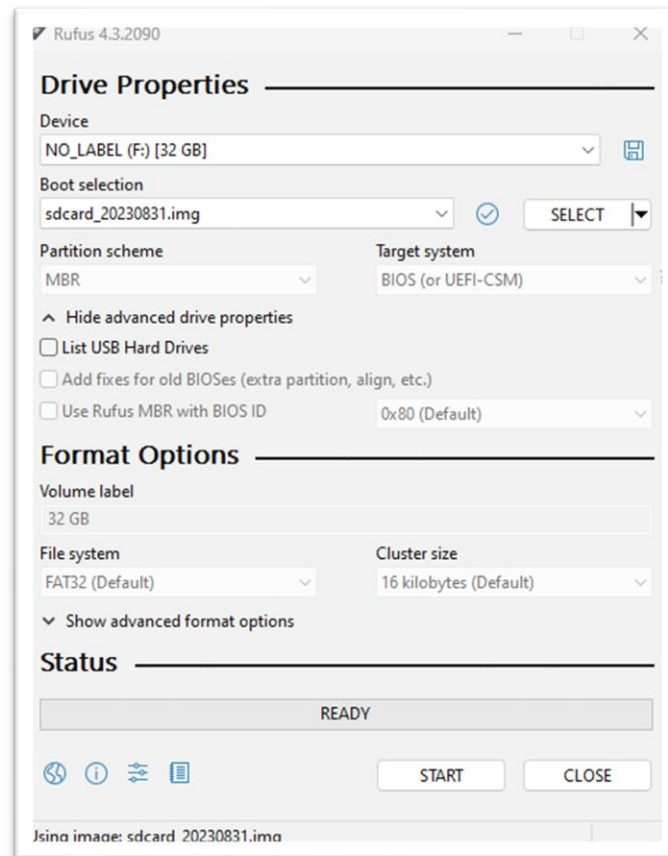


10. Now click on the  button to start the process of writing to the microSD memory card.

11. A security prompt appears first. This must be acknowledged by clicking on .

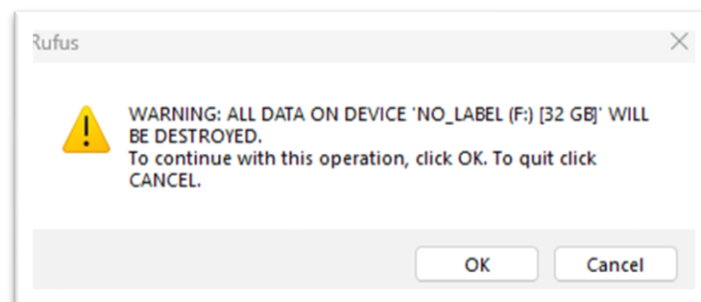


12. The selected firmware is now written to the microSD memory card. The progress is displayed via a status bar.

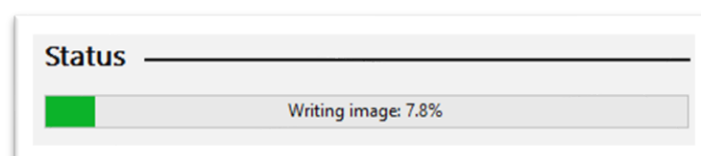

13. As soon as the process has been successfully completed, the status  appears. You can now exit the program by clicking on .

14. Before you remove the memory card from the PC, click  on in the status bar of your operating system and then select the drive of the microSD memory card and click on 'Eject'.

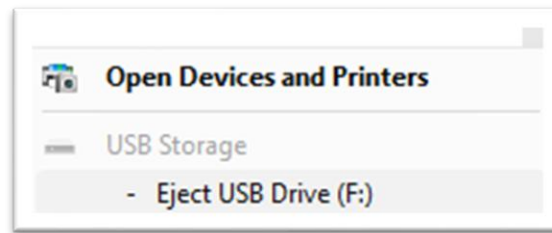

15. The microSD memory card may only be removed when you are prompted to do so.




Note: *Never remove the microSD memory card from the PC without first 'ejecting' it.*

2.2 Updating the Xiegu X6200 operating system (APP)

First of all, check the current version of the APP. FIRMWARE, FPGA and HARDWARE and make a note of the current version string values.


1. After short pressing the [GEN] button, the general/default menu softkeys are displayed at the bottom of the LCD.

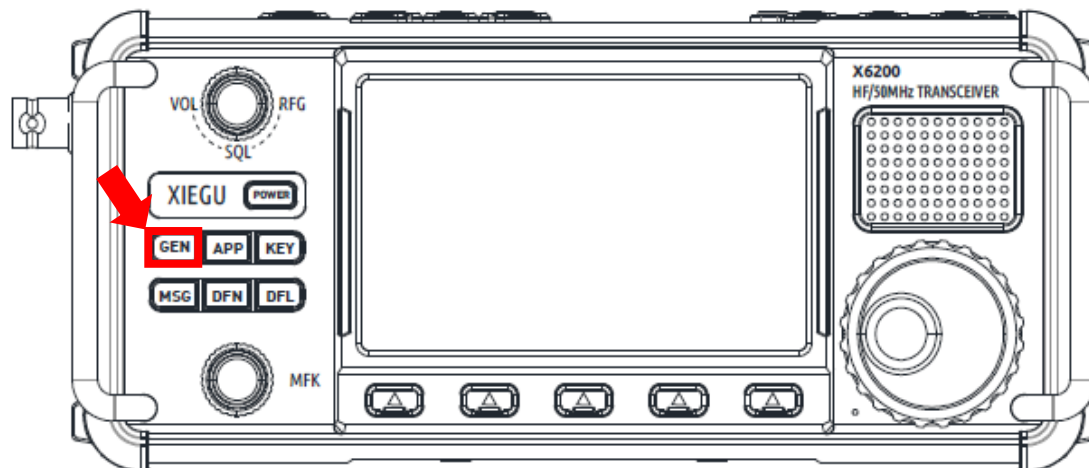

2. Short press the 'SYSTEM' softkey to call up the corresponding submenu.
3. Now select the 'SYSTEM INFO' item using the MFK rotary control (bottom left of the LCD) and confirm your selection by short pressing the MFK rotary control in.




- The LCD now shows the current version numbers of the operating system (APP) and firmware (FIRMWARE).

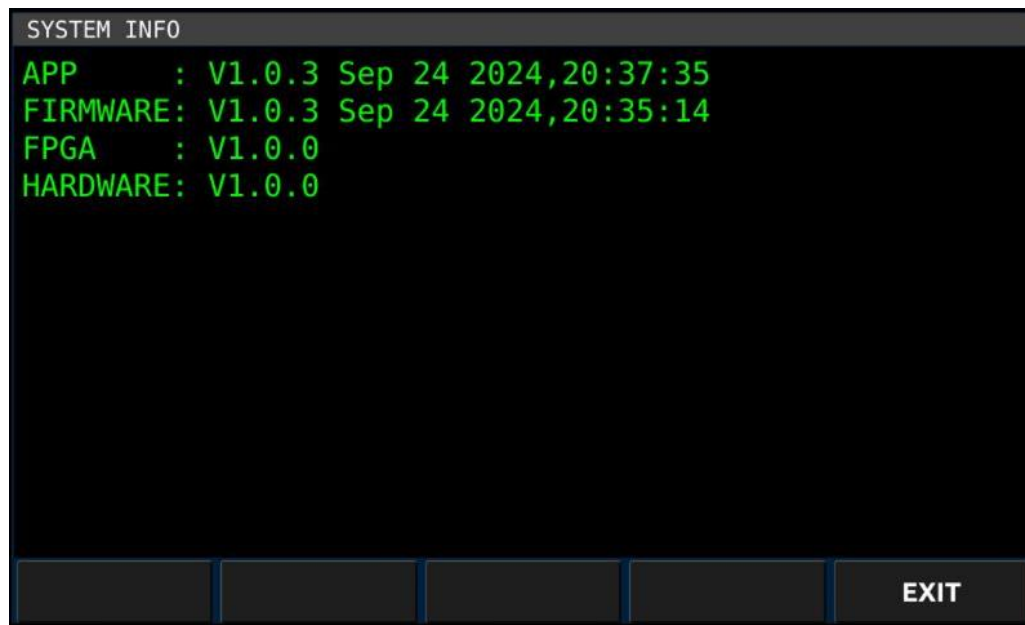


- Make a note of all four version strings.
- Turn off the Xiegu X6200.
- Make sure that the Xiegu X6200 is completely switched off for at least 30 seconds before inserting the microSD memory card you have prepared into the slot on the right-hand side of the Xiegu X6200. The 8 contact fingers of the microSD memory card must point towards the LCD screen.

The slot for the microSD memory card has a mechanism similar to a ballpoint pen. If you carefully push the microSD memory card in as far as it will go, it will then come out again by about 2.5 mm. This is the condition required for the microSD memory card to be read by the Xiegu X6200. To remove the card, push the microSD memory card in again as far as it will go, the microSD memory card will come out 6.5 mm and you can then simply remove it.

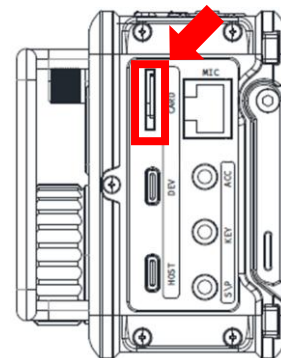

- Insert the microSD memory card into the microSD slot on the right-hand side of the Xiegu X6200.
- Remove the battery pack
- Connect the Xiegu X6200 to an external power supply of 13.8V (12V min). The Xiegu Label besides the power button will start flashing red (because there is no battery pack installed).
- Press the [POWER] button  until the Xiegu logo is seen on the screen. The Xiegu label left besides the [POWER] button  lights up solid green although the battery pack is missing.

12. The normal waterfall display will not appear, rather after about 15 seconds, the operating system (APP) starts to update itself automatically without the need for manual intervention.
13. During the APP update process various status information is output on the Xiegu X6200.

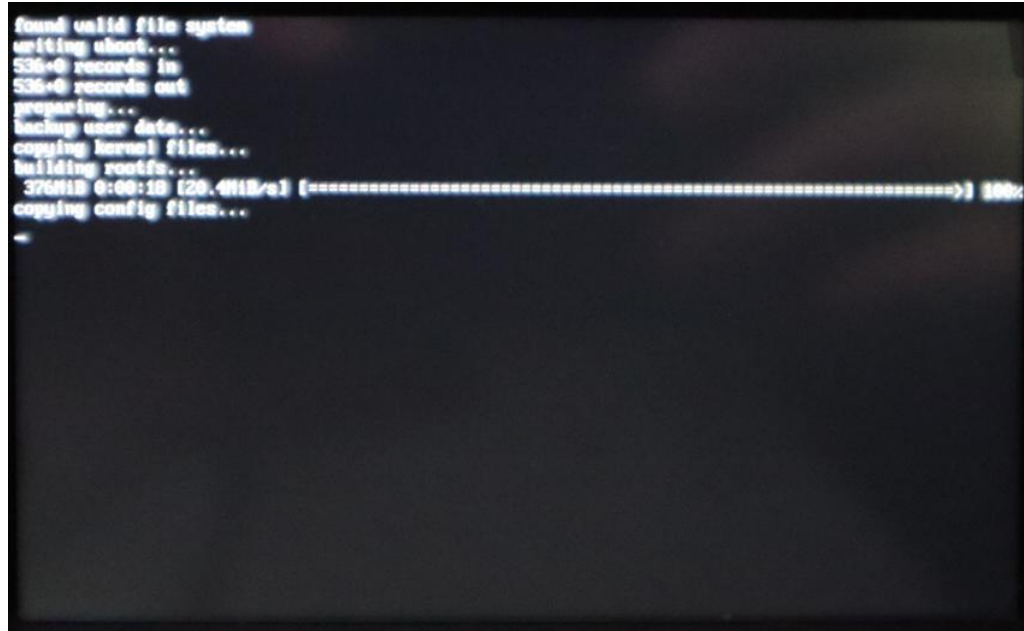

14. After about 45 seconds, the APP update process is complete and the shutdown message '[Info] Update finished!' is displayed on the LCD, after which the Xiegu X6200 shuts down automatically.
15. **Wait** until the Xiegu Label besides the power button again starts flashing red.

Note: Do not remove power or press any key on the Xiegu X6200. It takes at least 3 minutes until the Xiegu label left by the [POWER] button starts flashing red again. Please be patient.

16. The microSD memory card should now be removed. To do this, press the microSD memory card fully in once more and it will bounce back and stick out about 6.5 mm. You can now remove the microSD memory card.
17. The update of the operating system (APP) is now complete. This completes the first update step.
18. Disconnect the external power supply from the Xiegu X6200.

This completes updating the Xiegu X6200 operating system (APP)

Note: Do not forget to remove the microSD memory card from the Xiegu X6200 after updating the operating system. Otherwise, the update process will run again the next time you start the Xiegu X6200.

2.3 Updating the firmware of the Xiegu X6200 (FIRMWARE)


After updating the operating system (APP), the firmware must now be updated.

Note: The Xiegu X6200 must be connected to a stable 13.8V power supply during the entire update process in order to update the firmware.

1. Make sure that no microSD card is inserted in the slot on the right-hand side of the Xiegu X6200.
2. Ensure the battery pack is still removed.
3. Connect the Xiegu X6200 to an external power supply of 13.8V (12V min).
4. Press the [POWER] button  until the Xiegu logo is seen on the screen. The label left besides the [POWER] button  lights up solid green although the battery pack is missing.
5. Then press the following in succession: [GEN] button → 'SYSTEM' softkey to access the system settings menu.
6. Select 'FIRMWARE UPGRADE' using the inner or outer MFK rotary knob and confirm your selection by a short press of the MFK rotary knob in.



7. A list of possible baseband firmware versions might appear under the heading 'Firmware upgrade'. As a rule, however, there will only be one version (it was loaded as part of the APP upgrade in the last section). If there are multiple options, select the desired version from a list by pressing the 'PREV' and 'NEXT' softkeys.

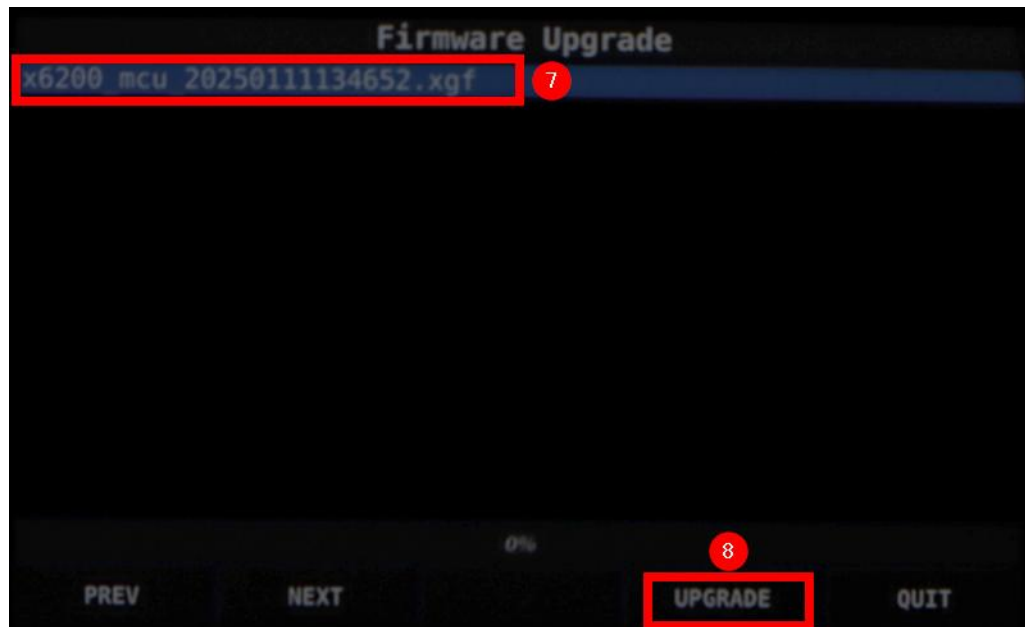


8. Confirm your selection by pressing the softkey labeled 'UPGRADE'.
9. Within a few seconds, the following will appear in the title bar one after another
- Firmware Upgrade: Erasing Flash
 - Firmware Upgrade: Writing Flash
 - Firmware Upgrade: Done
10. Press the softkey marked 'QUIT'.
11. Press the softkey marked 'EXIT'.
12. Press the [POWER] button  until the display turns dark and you only see a small, blinking underline cursor in the upper left corner of the screen.
13. Wait until the Xiegu Label to the left of the [POWER] button  again starts flashing red.

Note: Do not remove power or press any key on the Xiegu X6200. It takes at least 3 minutes until the Xiegu label left by the [POWER] button starts flashing red again. Please be patient.

14. Wait until the logo flashes red and then press the [POWER] button  until the Xiegu logo appears on the screen and a normal startup should follow.


15. To check whether the firmware update was successful, short press the [GEN] button, the general/default menu softkeys are displayed at the bottom of the LCD.

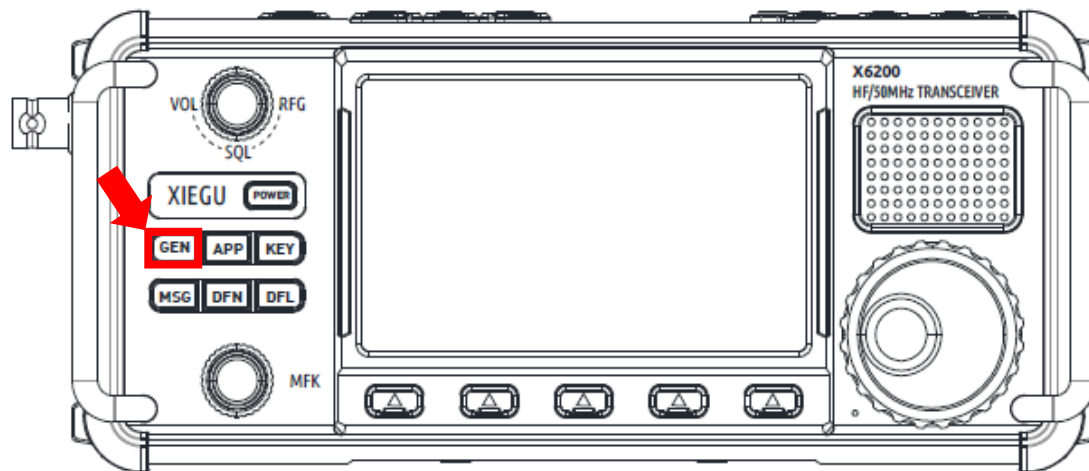

16. Short press the 'SYSTEM' softkey to call up the submenu.
17. Now select the 'SYSTEM INFO' item using the MFK rotary control (bottom left of the LCD) and confirm your selection by a short press in of the MFK rotary control.



18. The LCD now shows both, the version of the operating system (APP) and the version of the firmware (FIRMWARE). (HARDWARE and FPGA versions will not change during this process).

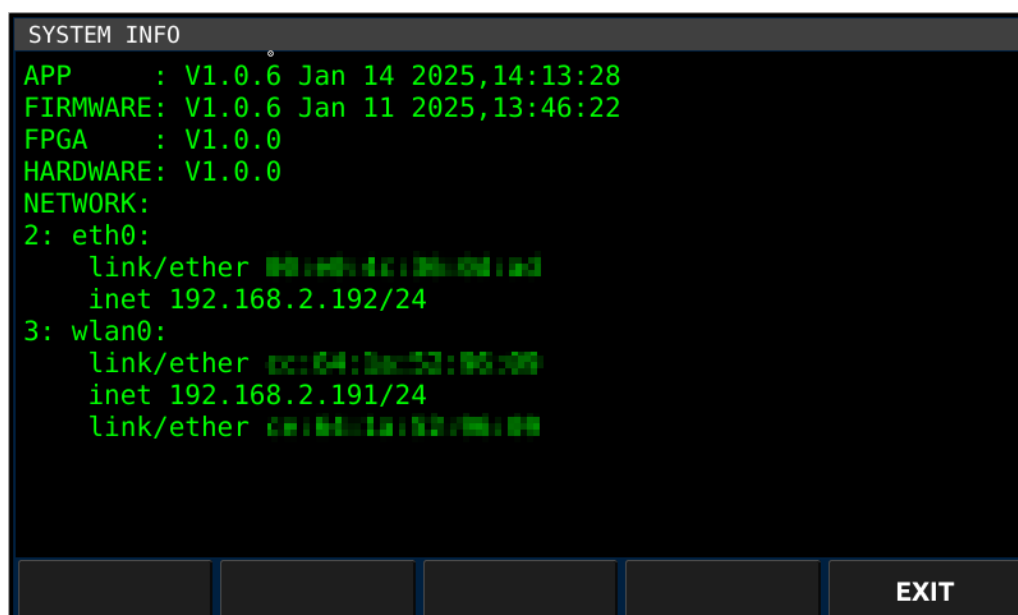

Notes: The 'NETWORK' settings will only be visible if 'WLAN' has been activated or an external ethernet module has been connected to the HOST-port.

19. Check is the version of the operating system (APP) and the version of the firmware (FIRMWARE) correspond with the update package version numbers.
20. Finally perform a FACTORY RESET ([GEN] → 'SYSTEM' → 'FACTORY RESET') in order to put the radio into a standard configuration avoiding any side-effects from updating the firmware.
21. Turn off the Xiegu X6200.
22. Reinsert the battery pack on the Xiegu X6200.

This completes the update process.

For older firmware versions of the Xiegu X6200, please visit our support area at <https://radioddity.com/pages/xiegu-download>.

Notes: *Never install any firmware not originating from Radioddity or Xiegu. Always check the availability of the update archive on the Radioddity support page for the Xiegu X6200 before performing an update that may have been revoked in the meantime.*

3 Where to find further information?

On the Internet you will find a variety of sources with information about the Xiegu X6200. When watching videos make sure that the Xiegu X6200 in the video is at the same firmware level as yours (features can change and bugs may be fixed between firmware versions).

3.1 Xiegu-X6200 group on groups.io


All users of the Xiegu X6200 also find valuable help via the corresponding Xiegu X6200 group within groups.io. Visit <https://groups.io/g/xiegu-x6200> to join the Xiegu-X6200 group with its increasing number of members. Make sure your 'Display name' states either your first + last name or your first name + callsign.

3.2 Radioddity support area

Please note that you can find all firmware, software and user manuals in the support section of our official Radioddity website by following these steps:

<https://www.radioddity.com/> → Support → Xiegu → X6200

For the Xiegu X6200, the resulting support page looks something like this:

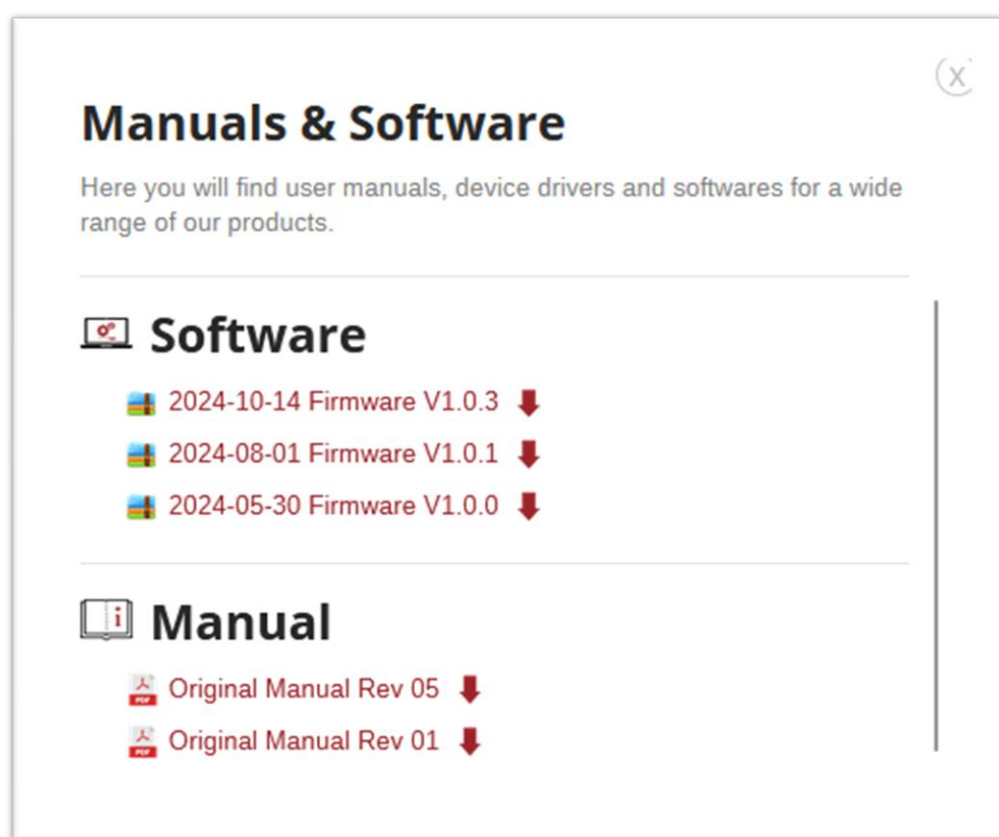

As soon as a new file is available (e.g., firmware updates, updated manuals or others), these files will be published in our support area.

If you do find any bug in the radio's firmware, our manual or if you are missing a feature, you would have expected, write an email to support@radioddity.com. In general, the firmware-updates for your Xiegu X6200 are free of charge. Using a firmware not originating from Xiegu may void your warranty.



Thank You for Shopping at Radioddity!

FIND TUTORIALS, SUPPORT AND MORE AT:



<https://www.radioddity.com/>



<https://www.facebook.com/radioddity>



<https://www.youtube.com/c/Radioddityradio>

We would like to thank all Radioddity customers for their constructive feedback.

If you find an error in the firmware of the Xiegu X6200 or in this documentation, or if you miss a function that you would have expected, or even if a detail has not been described to the expected extent, please feel free to write a message to support@radioddity.com. In general, firmware updates for your Xiegu X6200 are free of charge. The use of non-Xiegu firmware for this radio may invalidate the warranty.