



Technical Rider

11 FOH XLR inputs 3 line-level inputs Self-contained IEM 18U rack, approx. 50 kg

Technical: Christopher Krohn
contact@dystekt.band
Booking: contact@dystekt.band
<https://dystekt.band>
<https://www.instagram.com/dystektofficial>

CRITICAL FOH INSTRUCTION

Do not enable phantom power on any Dystekt FOH input.

The WING Rack supplies 48 V internally only to the overhead microphones. FOH must keep 48 V disabled on all 11 channels.

FOH Input List

Ch.	Source	Source path	FOH signal	XLR	48 V
1	Lead vocal	Dynamic Audix vocal mic, model TBC → MS8000 isolated split	Mic level	Yes	OFF
2	Guitar 1	Quad Cortex mono balanced XLR → MS8000 isolated split	Line level	Yes	OFF
3	Guitar 2	Quad Cortex mono balanced XLR → MS8000 isolated split	Line level	Yes	OFF
4	Bass track	Playback laptop via USB → WING Rack / S32 output	Line level	Yes	OFF
5	Kick trigger	Alesis Strike Pro SE → Millenium DI-E passive DI → MS8000 split	Mic level after DI	Yes	OFF
6	Snare trigger	Alesis Strike Pro SE → Millenium DI-E passive DI → MS8000 split	Mic level after DI	Yes	OFF
7	Overhead L	Audix condenser mic, model TBC → MS8000 isolated split	Mic level	Yes	OFF
8	Overhead R	Audix condenser mic, model TBC → MS8000 isolated split	Mic level	Yes	OFF
9	Rack Tom 1	Drum mic → MS8000 isolated split	Mic level	Yes	OFF
10	Rack Tom 2	Drum mic → MS8000 isolated split	Mic level	Yes	OFF
11	Floor Tom	Drum mic → MS8000 isolated split	Mic level	Yes	OFF


Source notes

- Use line-input mode or pads for both Quad Cortex channels and the bass channel.
- Guitar tones already contain amp, cabinet and effects processing. Do not add cabinet simulation.
- Kick and snare sounds are generated by the Alesis module and may be processed by FOH as required.

Playback and split

- Click is IEM-only and is never sent to FOH.
- All sources except bass reach FOH through transformer-isolated MS8000 outputs.
- Bass is a balanced mono line-level XLR from an S32 output.

System, Rack and Venue Requirements

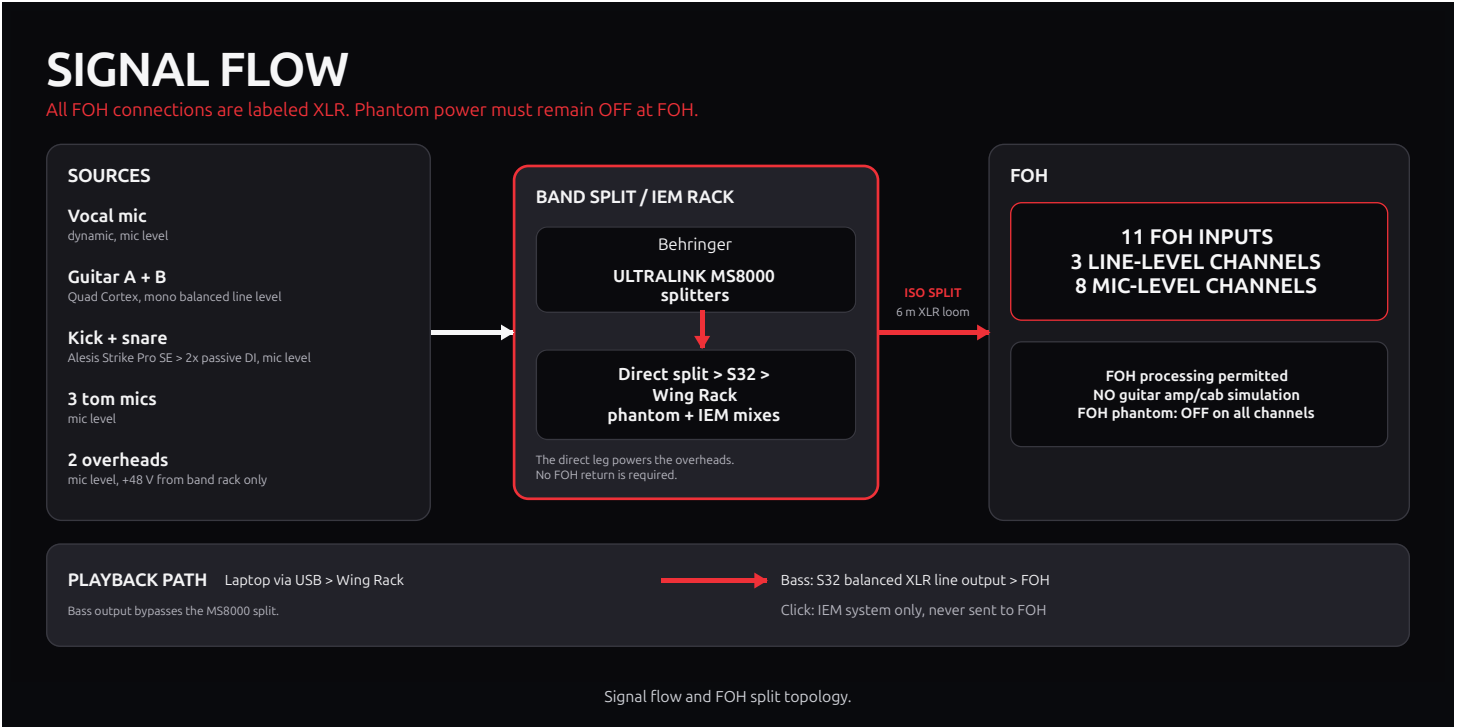

IEM and playback rack

- Contents** WING Rack, S32, MS8000 splitters, Sennheiser XSW IEM B-Band, wired IEM connections, power conditioner and playback integration
- Size** 18U, approx. 55 × 99.5 × 60 cm
- Weight** Approx. 50 kg
- Position** Downstage beside either guitar, wherever practical
- Power** One safe, grounded stage outlet
- FOH loom** Individually labeled XLR tails, approx. 6 m

Monitoring

- All musicians use individual IEM mixes, wireless or wired.
- No venue monitor mixes, monitor engineer or wedges are required.
- Existing wedges may remain on stage.
- No FOH return is required. Talkback is optional by prior agreement.
- No ambience microphones are currently used.


Venue provides

- Suitable PA and competent FOH engineer
- At least 11 available XLR inputs
- Three inputs capable of accepting or padding line-level XLR signals
- Safe stage power near the rack
- Stage-box position within reach of the 6 m loom

Dystekt provides

- Vocal mic, stand and cable
- Two Quad Cortex units and all guitar cabling
- Playback laptop, bass track, click and rack integration
- Drum kit, cymbals, hardware, triggers, Alesis module and passive DIs
- Tom and overhead mics with clips and stands unless an agreed venue package is used
- Complete IEM rack, systems, 6 m FOH loom, power and signal cabling

Stage, Drums and Show Procedure

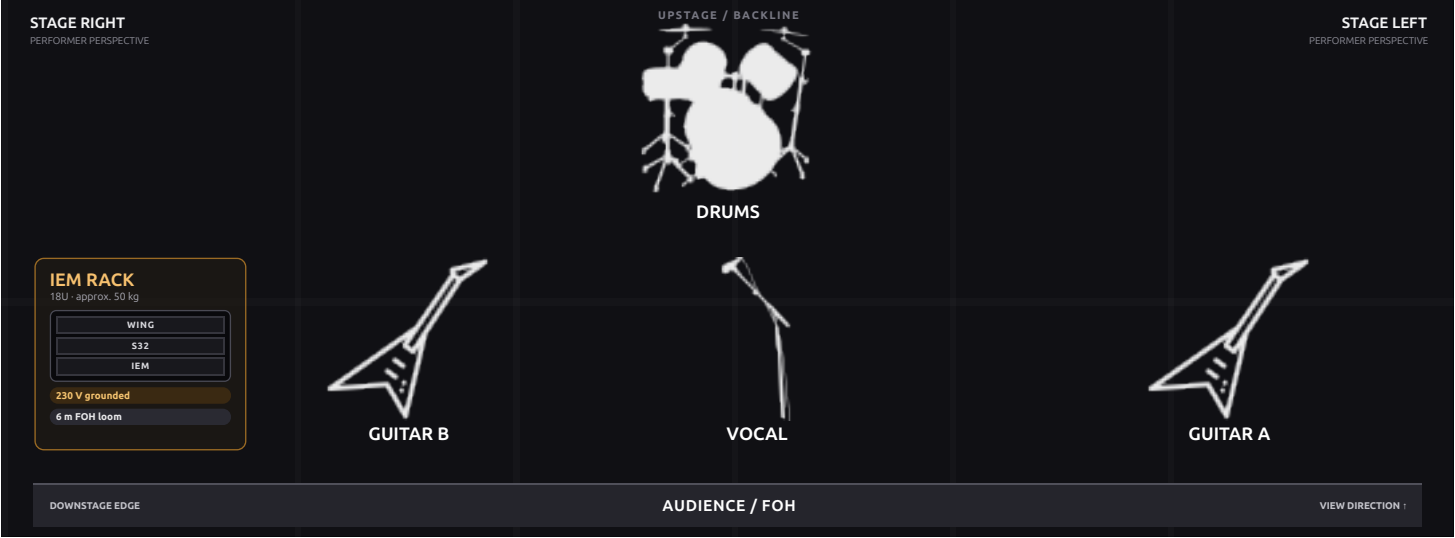

Lineup and layout

- Current lineup: guitar stage left, vocal center, guitar stage right, drums upstage center
- Bass is currently supplied by playback
- Rack is placed downstage beside either guitar, stage left or right
- No guitar cabinets, pedalboards or floor controllers
- Quad Cortex patch changes are automated by MIDI

Drum setup

- Left-handed kit: 1 kick, acoustic snare, 2 rack toms, 1 floor tom
- Double kick pedal
- Crashes left and right, ride left, china left, hi-hat right
- Triggered kick and snare; three close-miked toms; two overheads
- Drum rug required; riser not required

Timing and FOH

- Setup/changeover target: approx. 5-10 minutes
- Preferred soundcheck: approx. 5-10 minutes
- Festival line check: agree with production
- No touring FOH engineer
- FOH may apply suitable EQ, dynamics, gating and ambience

Advance confirmation: confirm 11 inputs, three line-capable inputs, 48 V disabled, one stage-power outlet, a suitable rack position within 6 m of the stage box and the drum-kit arrangement.

Show-specific deviations should be agreed with Christopher Krohn before the event.