USER MANUAL

Indoor stair treads with removable protective liner and TPE friction-grip backing


Brand / ASIN	YaoX / B0FHKT432K
Configuration	Moroccan Beige, 15 stair treads
Nominal size	8 x 30 in each; approximately 7.9 x 30 x 0.2 in
Construction	Dye-sublimated low-pile polyester surface, layered cushioning and support, TPE friction-grip backing
Intended use	Indoor residential stairs with clean, dry, smooth, sealed, level surfaces

READ BEFORE USE

These treads are designed to improve surface contact, but they cannot eliminate the risk of a fall. Use a handrail. Do not use any tread that moves, curls, remains wet, is damaged, or cannot lie completely flat.

1. Product overview

Each tread has a dye-sublimated low-pile textile surface and a TPE backing that grips through physical contact with a compatible stair surface. The pattern is infused into the surface fibers rather than applied as a separate transfer film. A removable liner protects the TPE during storage and shipping. Removing the liner does not expose permanent glue. Grip performance depends on full contact and proper surface preparation.

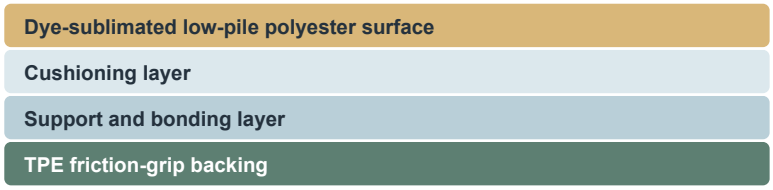

Layered construction

The protective liner shields the TPE during shipping. Removing it does not expose permanent glue. Diagram is not to scale.

LOW-PILE DESIGN

The approximately 0.2 in profile is intentional. It supports easier routine cleaning and reduces bulk at the step surface. Do not add pads underneath or stack one tread over another.

2. Surface compatibility

SURFACE STATUS	REQUIREMENT
May be suitable after a one-tread test	Smooth, sealed, level indoor wood; smooth tile; sealed stone or marble; smooth metal; smooth glass.
Do not use	Carpet; rough or unsealed wood; cracked or uneven steps; wet, oily, dusty, waxed, polished, or detergent-coated surfaces; outdoor stairs; heated or damp locations.
Surface finish caution	Floor finishes vary. Test one tread in a low-visibility area and inspect both the tread and stair finish before installing the full set.

3. Before installation

UNPACK AND FLATTEN

Shipping folds may create temporary creases. Place each tread on a clean, flat surface at room temperature and allow it to relax until the full tread and all four corners lie flat. Do not use heat, an iron, or a clothes dryer. Do not install a tread that remains curled.

- Measure every stair. The 30 in width is intended for the primary foot-contact area and may not cover the full stair width.
- Confirm the complete tread will rest on the horizontal step. Do not place it across the front nosing or up the vertical riser.
- Inspect each tread for damage, separated layers, loose edge binding, deep creases, or raised corners.
- Remove dust and debris from the stairs. If needed, clean according to the stair manufacturer's instructions.
- Remove all cleaner residue. Allow the stair surface to dry completely before installation.
- Make sure the TPE backing is clean and completely dry.
- Do not cut or trim the tread. Cutting may damage the edge binding and layered construction.

IMPORTANT

Wax, polish, oil, moisture, dust, and cleaning residue can reduce contact between the TPE and the stair surface. A visually clean step may still contain residue.

4. Installation

1 **Dry fit one tread**

Center one tread over the primary walking area. Keep the complete tread on the horizontal step and confirm that it does not extend over the front edge.

2 **Remove the protective liner**

Turn the tread over on a clean surface. Remove the clear liner without stretching or folding the TPE backing. The exposed TPE is a friction-grip surface, not permanent adhesive.

3 **Position carefully**

Lower the tread into place without trapping debris underneath. Keep spacing and alignment consistent from step to step.

4 **Press for full contact**

Smooth from the center toward the edges and press across the entire surface, including all corners. Do not leave air pockets or lifted edges.


5 **Test one tread**

While holding the handrail, apply gentle foot pressure and check for movement. Inspect all four corners. If the tread shifts or lifts, remove it and follow the troubleshooting guide.

6 **Install the remaining treads**

Continue only after the first tread remains flat and stable. Test every tread individually before normal use.



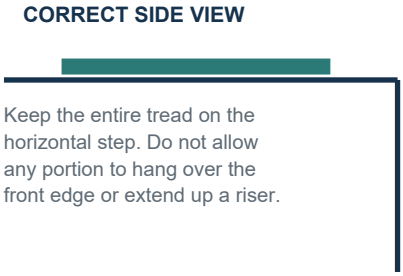

AFTER INSTALLATION Walk each step carefully while using the handrail. Stop immediately if any tread moves, lifts, folds, or feels unstable. Correct the cause before using the staircase again.

5. Routine inspection and care

- Check position, corners, edge binding, backing, and surface condition before use and after cleaning.
- Remove dry debris with gentle vacuuming. Avoid aggressive rotating brushes that could damage the surface or edges.
- Clean spills promptly. Do not use a tread while the textile surface, TPE backing, or stair is wet.
- Recheck grip after moving furniture, changing floor-care products, or refinishing the stairs.
- Keep the staircase well lit and continue to use the handrail.

6. Washing and reinstallation

STEP	REQUIREMENT
1. Remove	Lift slowly from one corner. Do not sharply pull, stretch, or fold the backing.
2. Wash	Use cold water, a gentle cycle, and a small amount of mild detergent. Wash separately.
3. Avoid	Do not use bleach, fabric softener, dry cleaning, hot water, steam, an iron, or a heated dryer.
4. Rinse	Remove detergent residue completely. Residue can reduce TPE surface contact.
5. Dry	Lay flat and air dry in the shade. The textile surface and TPE backing must be completely dry.
6. Reinstall	Clean and dry the stair again, inspect the tread, then repeat the one-tread compatibility and movement test.

7. Stop-use and replacement conditions

STOP USING THE AFFECTED TREAD

Remove the tread from service if it moves during use, develops raised corners, cannot lie flat, remains slippery after cleaning and drying, has damaged edge binding, shows layer separation, or has a cracked, hardened, deformed, or contaminated backing.

8. Removal, storage, and support

- Lift slowly from one corner and support the tread as it is removed.
- Store clean, completely dry, and flat or loosely rolled. Do not sharply fold or place heavy items on the corners.
- Keep the product away from high heat, open flame, and prolonged moisture.
- For product support, use the Contact Seller option from the Amazon order page. Provide the ASIN, order number, package label or batch information, a photo of the full stair, and a close-up of the issue.

Document control: YaoX User Manual, ASIN B0FHKT432K, version 2.0. Keep this manual for future reference. Product appearance may vary slightly by lighting and production batch; safety and installation requirements remain the same.