

# Robust Adaptive Kolmogorov-Arnold Neural Control

Adilkhan Salkimbayev and Khawaja S. Haider

*School of Information Technology and Engineering, Kazakh-British Technical University, Almaty, Kazakhstan*

---

## Abstract

Reliable real-time control of non-minimum phase systems remains a bottleneck for embedded platforms due to the computational burden of online optimization, cumbersome architecture and insufficient stability guarantees in the presence of model mismatch. We propose a Lipschitz-continuous adaptive (LCA) architecture using recursive least squares (RLS) to update Kolmogorov-Arnold networks (KANs) for rapid, robust, and interpretable control of control-affine multivariable systems with a left-invertible input map. The robustness claim is established via Lyapunov-based analysis, proving Input-to-state stability with respect to the lumped approximation-and-disturbance error and global uniform ultimate boundedness of the closed-loop error state. A high-fidelity quadruple-tank benchmark under adversarial parameter drift is used as a representative instance, evaluated over a 50-seed Monte-Carlo against linear time-varying model predictive control (LTV-MPC) and a radial-basis-function (RBF) adaptive baseline. The proposed controller matches the aggregate tracking of both while engaging the cross-coupled actuation that LTV-MPC deviates further on — holding the coupled, non-minimum-phase tank approximately 30% closer to setpoint than LTV-MPC — producing the smoothest command of all four controllers — lower actuator total variation than both the RBF baseline and a prediction-horizon LTV-MPC — and the lowest median per-step cost at a branch-free, worst-case-bounded evaluation. Because the controller is distilled into an explicit symbolic (polynomial) regressor, the resulting control law is directly inspectable, in contrast to optimization-based or uninterpretable neural controllers. The architecture is therefore particularly suited to resource-constrained real-time embedded platforms (e.g., Cortex-M-class microcontrollers), where bounded, deterministic per-step evaluation is critical.

*Key words:* Adaptive control, model predictive control, Kolmogorov-Arnold networks, neuro-symbolic control, real-time control, interpretable neural networks, non-minimum phase systems

---

## 1 Introduction

Model predictive control (MPC) and robust control strategies have demonstrated exceptional performance in numerical benchmarks, displaying extraordinary resilience and disturbance rejection (Jerez et al., 2014). These results have extensively validated the theoretical stability guarantees established in foundational works (Mayne et al., 2000; Borrelli et al., 2017). However, the computational requirements for such optimization-based techniques have impeded their widespread deployment in industrial plants. Despite evolution in quadratic program (QP) solvers (Stellato et al., 2020) and the democratization of convex optimization tools (Boyd and Vandenberghe, 2004; Diamond and Boyd, 2016), a stalemate has emerged: industrial sectors remain reliant on PID control, largely unable to adopt MPC due to the hardware requirements of online optimization. Thus, a need for a computationally efficient

nonlinear controller persists.

Recent data-driven approaches have sought to replace resource-intensive online optimization with learnable architectures. While methods like SINDYc (Brunton et al., 2016) improve interpretability through sparse identification, the broader adoption of neural control has been stifled by the intractable structure and uninterpretable nature of standard multi-layer perceptrons (MLPs) (Hose et al., 2024). By contrast, Kolmogorov-Arnold networks (KANs) provide an alternative: by utilizing Kolmogorov-Arnold theorem of universal function approximation (Kolmogorov, 1957; Arnold, 1957), KANs are capable of providing a tractable symbolic structure, possessing faster scaling laws than MLPs (Liu et al., 2024). As a result, KANs enabled research on interpretable neural network-based system identification and control (Cruz et al., 2025; Kim et al., 2025).

In previous work (Salkimbayev, 2026), the feasibility of deploying static KANs for feedback control was established, demonstrating preservation of high fidelity of the control law with interpretable structure, which enabled

---

*Email addresses:* [a.salkimbayev@kbtu.kz](mailto:a.salkimbayev@kbtu.kz) (Adilkhan Salkimbayev and), [s.khawaja@kbtu.kz](mailto:s.khawaja@kbtu.kz) (Khawaja S. Haider).

a forensic audit of KAN’s output and relative simplicity of the control law. However, the process relied on offline training, leaving the controller vulnerable to unmodeled dynamics and parameter drift once deployed and providing no formal guarantees of robustness.

Online function-approximation adaptive control is a mature paradigm: radial-basis-function (RBF) networks (Sanner and Slotine, 1991) and feedforward neural networks (Lewis et al., 2020; Ge et al., 2013) have long been used as in-loop regressors whose weights adapt online, with Lyapunov-based boundedness guarantees rooted in classical robust adaptive control (Ioannou and Sun, 1996; Astrom and Wittenmark, 1995; Narendra and Annaswamy, 2012; Krstic et al., 1995). The distinction between the proposed controller and the former is not adaptation per se but the form of the regressor: where RBF/MLP schemes adapt a black-box basis, the proposed controller adapts the linear weights of an interpretable, symbolically distilled KAN basis using recursive least squares (RLS) (Plackett, 1950), retaining the auditability of the static KAN control law while recovering robustness to drift. This positions the contribution between black-box neural-adaptive control and sparse-identification approaches such as SINDYc (Brunton et al., 2016).

In this article, the Lipschitz-continuous adaptive RLS-KAN (LCA-RLS-KAN) is proposed. The contributions of this paper are threefold: first, RLS is introduced as an update law for the KAN-distilled polynomials that operates online; second, a Lyapunov-based theorem establishing Input-to-state stability (ISS) and global uniform ultimate boundedness (GUUB) of the tracking and weight errors, with the (separately, a priori bounded) integral state handled via a clamped anti-windup integrator, is provided, with corollaries quantifying practical tracking accuracy in the ideal case and robustness under lack of persistent excitation (PE); third, a 50-seed Monte-Carlo study on a high-fidelity quadruple-tank benchmark shows that the controller matches LTV-MPC and a black-box RBF adaptive baseline on aggregate tracking while engaging the cross-coupled, non-minimum-phase actuation that MPC under-serves, with the lowest actuator total variation of all four controllers and the lowest median per-step cost at a worst-case-bounded, branch-free evaluation — architectural advantages for embedded deployment.

## 2 Related Work

*Function-approximation adaptive control.* The closest methodological relatives adapt an in-loop function approximator online under a Lyapunov boundedness guarantee: RBF networks (Sanner and Slotine, 1991) and feedforward/recurrent neural networks for robotic and nonlinear systems (Lewis et al., 2020; Ge et al., 2013). These supply an uninterpretable regressor whose

Table 1

Positioning relative to representative control approaches. ✓: yes; ~: partial; ×: no.

| Approach                                                     | Online adapt. | Interp. law | Stability cert. | Determ. per step |
|--------------------------------------------------------------|---------------|-------------|-----------------|------------------|
| LTV / nonlinear MPC                                          | ~             | ×           | ✓               | ×                |
| Approximate MPC (MLP) (Hose et al., 2024)                    | ×             | ×           | ~               | ✓                |
| RBF/MLP adaptive (Sanner and Slotine, 1991; Ge et al., 2013) | ✓             | ×           | ✓               | ✓                |
| SINDYc (Brunton et al., 2016)                                | ×             | ✓           | ~               | ✓                |
| Static symbolic KAN (Salkimbayev, 2026)                      | ×             | ✓           | ×               | ✓                |
| LCA-RLS-KAN (ours)                                           | ✓             | ✓           | ✓               | ✓                |

internal units carry no physical meaning. The proposed method retains the adaptive-update machinery of this lineage but replaces the regressor with an interpretable, symbolically distilled KAN basis; the controlled RBF baseline of Sec. 5.2 is precisely a representative of this class, so that comparison isolates the effect of the basis itself.

*Robust and adaptive control foundations.* The robustification employed here — exponential forgetting with bounded-gain covariance handling (Fortescue et al., 1981), an optional  $\sigma$ -modification (Sec. 4.7), and anti-windup on the integral state — is classical (Ioannou and Sun, 1996; Astrom and Wittenmark, 1995; Narendra and Annaswamy, 2012; Krstic et al., 1995; Slotine and Li, 1991). Input-to-state stability (Sontag, 1989; Khalil and Grizzle, 2002) is the property certified in Sec. 4.6.

*Learning-based and approximate MPC.* A parallel line replaces online optimization with a learned surrogate of an MPC policy, typically a MLP (Hose et al., 2024), or identifies sparse governing dynamics for control (Brunton et al., 2016). Such surrogates inherit the opacity of their underlying networks. Distillation into a symbolic law (Sec. 4.4) instead yields an inspectable controller; the present contribution is to make that distilled law adaptive and to equip it with a stability certificate.

*Kolmogorov–Arnold networks and neuro-symbolic control.* KANs (Liu et al., 2024), grounded in the Kolmogorov–Arnold representation theorem (Kolmogorov, 1957; Arnold, 1957), have recently been applied to interpretable system identification (Cruz et al., 2025) and constrained control (Kim et al., 2025). This work exploits their distillability as the route to a symbolic, online-adaptive control law.

*The quadruple-tank benchmark.* Johansson’s process (Johansson, 2000) is a standard multivariable, adjustable-zero, non-minimum-phase (NMP) testbed (Skogestad and Postlethwaite, 2005), studied under model-based (Gatzke et al., 2000) and distributed/decentralized MPC (Alvarado et al., 2011); it is used here as a representative instance of the control-affine class of Sec. 3.1. Table 1 positions these approaches on the axes that matter for embedded deployment.

Table 2

Notation used in the stability analysis.

| Symbol                                     | Meaning                                          |
|--------------------------------------------|--------------------------------------------------|
| $x$                                        | plant state (here, tank levels $h_{1...4}$ )     |
| $e = x - x_{\text{ref}}$                   | tracking error                                   |
| $\hat{\theta}, \theta^*$                   | estimated / ideal linear KAN weights             |
| $\tilde{\theta} = \hat{\theta} - \theta^*$ | weight estimation error                          |
| $\hat{d}, d^*$                             | integral state / unknown constant bias           |
| $\tilde{d} = \hat{d} - d^*$                | integral-state error (clamped, bounded a priori) |
| $\zeta = [e^T \tilde{\theta}^T]^T$         | Lyapunov error state                             |
| $\Phi_{\text{KAN}}(x)$                     | distilled nonlinear regressor vector             |
| $\delta(x)$                                | lumped bounded disturbance (see text)            |

### 3 Problem Formulation

#### 3.1 System Class and Notation

The controller is developed for the class of control-affine multivariable systems

$$\dot{x} = f(x) + Bu, \quad x \in \mathbb{R}^n, \quad u \in \mathbb{R}^m, \quad (1)$$

where  $f : \Omega \rightarrow \mathbb{R}^n$  is continuous on a compact operating set  $\Omega \subset \mathbb{R}^n$  and  $B \in \mathbb{R}^{n \times m}$  has full column rank (left-invertible), so that the left pseudoinverse  $B^+ = (B^T B)^{-1} B^T$  satisfies  $B^+ B = I$ . The plant may be non-minimum-phase (NMP) and may be underactuated ( $m < n$ ); the residual  $(BB^+ - I)(\cdot)$  arising from underactuation is treated as a bounded disturbance (Lemma 1). The control objective is tracking of a feasible, bounded reference  $x_{\text{ref}}(t)$  with bounded  $\dot{x}_{\text{ref}}(t)$ , with all internal signals remaining bounded under non-vanishing model mismatch. The quadruple-tank process of Sec. 3.2 is a representative instance of (1).

Throughout,  $\|\cdot\|$  is the Euclidean norm and  $\|\cdot\|_\infty$  the essential-supremum norm; for  $M = M^T \succ 0$ ,  $\lambda_{\min}(M)$ ,  $\lambda_{\max}(M)$  denote its extreme eigenvalues and  $\|v\|_M^2 := v^T M v$ . The error variables used in the analysis are summarized in Table 2. The Lyapunov analysis (Sec. 4.6) is conducted over the composite state  $\zeta = [e^T \tilde{\theta}^T]^T$ ; the integral-state error  $\tilde{d}$  is tracked separately and bounded directly by construction (Lemma 2) rather than through  $\zeta$ .

#### 3.2 Benchmark Instance: Quadruple-Tank Process

To compare both controllers, Johansson’s quadruple-tank process is used — a nonlinear multivariable benchmark consisting of four interconnected liquid tanks and two control inputs, exhibiting strong cross-coupling and NMP behavior (Johansson, 2000). It is an instance of

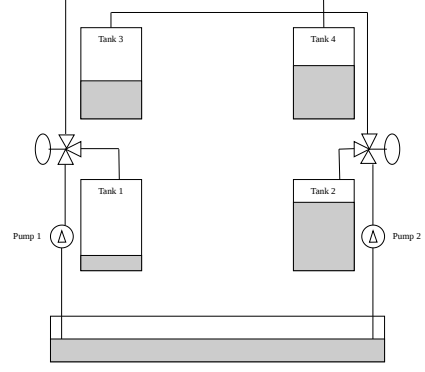


Fig. 1. **Quadruple-tank process.** Four interconnected tanks driven by two pumps; each pump  $i$  splits its flow by valve ratio  $\gamma_i$  between a lower tank and the diagonally opposite upper tank, producing the strong cross-coupling and, for  $0 < \gamma_1 + \gamma_2 < 1$ , the non-minimum-phase zero.

(1) with  $n = 4$ ,  $m = 2$ , and has since become a standard benchmark for multivariable, decentralized, and distributed control design (Gatzke et al., 2000; Alvarado et al., 2011). The process can be configured to minimum-phase or NMP regimes, enabling a controlled assessment of performance degradation and robustness challenges in adversarial control settings (Johansson, 2000; Skogestad and Postlethwaite, 2005).

The quadruple-tank model follows these equations (Johansson, 2000):

$$\begin{aligned} \frac{dh_1}{dt} &= -\frac{a_1}{A_1} \sqrt{2gh_1} + \frac{a_3}{A_1} \sqrt{2gh_3} + \frac{\gamma_1 k_1}{A_1} u_1 \\ \frac{dh_2}{dt} &= -\frac{a_2}{A_2} \sqrt{2gh_2} + \frac{a_4}{A_2} \sqrt{2gh_4} + \frac{\gamma_2 k_2}{A_2} u_2 \\ \frac{dh_3}{dt} &= -\frac{a_3}{A_3} \sqrt{2gh_3} + \frac{(1 - \gamma_2) k_2}{A_3} u_2 \\ \frac{dh_4}{dt} &= -\frac{a_4}{A_4} \sqrt{2gh_4} + \frac{(1 - \gamma_1) k_1}{A_4} u_1 \end{aligned} \quad (2)$$

In (2), tank and outlet cross-sectional areas  $A = [28, 32, 28, 32]$ ,  $a = [0.071, 0.057, 0.071, 0.057]$  are in  $\text{cm}^2$ ; levels  $h_i$  (cm), pump voltages  $u_i$  (V), pump gains  $k_1 = 3.14, k_2 = 3.29$  ( $\text{cm}^3/\text{Vs}$ ), valve ratios are  $\gamma_1 = 0.43, \gamma_2 = 0.34$ , and  $g = 981 \text{ cm/s}^2$ . The plant schematic is shown in Fig. 1.

#### 3.3 Control Objective

The plant configuration follows Johansson’s NMP setup, described in (Johansson, 2000). The target state is set as  $[10.0, 10.0, 2.0, 2.0]$  for tanks 1, 2, 3 and 4 respectively. In addition to the challenge of NMP control, both controllers are subjected to structured adversarial perturbations: slow parametric drift of valve coefficients

(modeling wear and aging), step-wise parameter deviations, and bounded external disturbances. These perturbations are non-vanishing, bounded and positioned outside of the nominal modeling assumptions typically required for LTV-MPC stability guarantees, while remaining physically plausible in industrial fluid systems. All perturbations are applied identically to both control systems, with no controller-specific tuning or compensation.

Performance is assessed over a 50-seed Monte-Carlo campaign (Sec. 5): each seed draws independent process- and measurement-noise realizations under an identical adversarial schedule,

- coefficient  $\gamma_1$  of the first pump degrades at a constant rate of  $-0.0011/\text{s}$ ;
- coefficient  $\gamma_2$  of the second pump undergoes a step-wise 20% drop at  $t = 25 \text{ s}$ .

A separate single-realization stress test (Sec. 5) additionally injects a 2.0 cm step disturbance into tank 2 at  $t = 30 \text{ s}$ , on top of the drift schedule, to expose cross-coupled recovery under model mismatch.

## 4 Controller Design & Stability Analysis

### 4.1 Preliminaries: Kolmogorov–Arnold Representation

The architecture rests on the Kolmogorov–Arnold representation theorem (Kolmogorov, 1957; Arnold, 1957): any continuous  $g : [0, 1]^n \rightarrow \mathbb{R}$  admits the finite superposition

$$g(x) = \sum_{q=0}^{2n} \Phi_q \left( \sum_{p=1}^n \phi_{q,p}(x_p) \right), \quad (3)$$

with continuous univariate inner and outer functions  $\phi_{q,p}, \Phi_q$ . A KAN (Liu et al., 2024) parameterizes these univariate maps as learnable splines placed on the network edges, while nodes perform summation; this is the structural dual of a MLP, in which fixed nonlinearities sit on nodes and learnable weights on edges. After offline training on input–output data of the plant nonlinearity, the trained univariate maps are distilled into a fixed, finite dictionary of basis functions, collected in the regressor  $\Phi_{\text{KAN}}(\cdot)$ , so that the control-relevant nonlinearity of (1) is represented as a linear-in-parameters model,

$$f(x) = \Phi_{\text{KAN}}(x)^T \theta^* + \varepsilon(x), \quad (4)$$

where  $\theta^*$  are the (unknown, constant) ideal weights and  $\varepsilon$  is the residual approximation error. Only the linear weights  $\theta$  are adapted online; the distilled basis is frozen. For the quadruple-tank instance, the inputs to  $\Phi_{\text{KAN}}$  are the measured/estimated tank levels and the regressor reproduces the square-root outflow and cross-coupling terms of (2); the distilled law for  $u_1$  reduces to the explicit algebraic form reported in Sec. 4.5.1.

### Proposition 1 (Regularity of the distilled basis)

The distilled regressor  $\Phi_{\text{KAN}} : \Omega \rightarrow \mathbb{R}^p$  is  $C^\infty$  and, on the compact operating set  $\Omega$ , both bounded and Lipschitz: the constants  $\Phi_{\max} := \sup_{x \in \Omega} \|\Phi_{\text{KAN}}(x)\|$  and  $L_\Phi := \sup_{x \in \Omega} \|\partial \Phi_{\text{KAN}} / \partial x\|$  are finite, and  $\|\Phi_{\text{KAN}}(x) - \Phi_{\text{KAN}}(y)\| \leq L_\Phi \|x - y\|$  for all  $x, y \in \Omega$ . For the quadruple-tank instance  $p = 10$ : seven affine state/error features, two quadratic NMP-coupling features, and a bias term, as instantiated in (12)–(13).

*Proof.* By the symbolic distillation (12)–(13), every component of  $\Phi_{\text{KAN}}$  is either an affine function of the normalized features, the square of an affine function (the quadratic NMP-coupling terms), or a constant; hence each is a multivariate polynomial of degree at most two and  $\Phi_{\text{KAN}} \in C^\infty(\mathbb{R}^n, \mathbb{R}^p)$ . Input normalization confines the operating envelope to the compact box  $\Omega$ , on which the continuous map  $\Phi_{\text{KAN}}$  attains its supremum (Weierstrass), so  $\Phi_{\max} < \infty$ . The Jacobian  $\partial \Phi_{\text{KAN}} / \partial x$  is affine, hence continuous and bounded on  $\Omega$ ; since the box  $\Omega$  is convex, the mean-value inequality gives the stated Lipschitz bound with  $L_\Phi < \infty$ . Boundedness therefore needs no separate enforcement in implementation: it is a property of evaluating a fixed polynomial dictionary on a compact domain.  $\square$

### Proposition 2 (Boundedness of ideal weights)

Define ideal weights as  $L^2(\Omega)$  projection of the plant nonlinearity onto the frozen basis,

$$\theta^* := \arg \min_{\theta \in \mathbb{R}^p} \|f - \Phi_{\text{KAN}}^T \theta\|_{L^2(\Omega)}^2, \quad (5)$$

which makes precise the ideal weights of (4) and pins  $\varepsilon = f - \Phi_{\text{KAN}}^T \theta^*$  as the  $L^2(\Omega)$ -orthogonal residual — the model error that no choice of weights can cancel. Let the distilled features be linearly independent on  $\Omega$ , equivalently  $\lambda_{\min}(G) > 0$  for the Gram matrix  $G := \int_{\Omega} \Phi_{\text{KAN}} \Phi_{\text{KAN}}^T dx$ . Then  $\theta^*$  is unique and bounded:

$$\begin{aligned} \theta^* &= G^{-1} \int_{\Omega} \Phi_{\text{KAN}} f dx, \\ \|\theta^*\| &\leq \frac{\Phi_{\max} \sup_{\Omega} |f| |\Omega|}{\lambda_{\min}(G)} =: \theta_{\max}. \end{aligned} \quad (6)$$

For the vector plant the bound applies to each output channel, all sharing the Gram  $G$ .

*Proof.* The quadratic objective (5) has normal equations  $G\theta^* = \int_{\Omega} \Phi_{\text{KAN}} f dx$ . Under  $\lambda_{\min}(G) > 0$  the symmetric Gram  $G$  is positive definite, so the minimizer  $\theta^* = G^{-1} \int_{\Omega} \Phi_{\text{KAN}} f dx$  is unique and  $\varepsilon$  is  $L^2(\Omega)$ -

orthogonal to the basis. Hence

$$\begin{aligned} \|\theta^*\| &\leq \|G^{-1}\|_2 \left\| \int_{\Omega} \Phi_{\text{KAN}} f \, dx \right\| \\ &\leq \frac{1}{\lambda_{\min}(G)} \int_{\Omega} \|\Phi_{\text{KAN}}\| |f| \, dx \leq \frac{\Phi_{\max} \sup_{\Omega} |f| |\Omega|}{\lambda_{\min}(G)}, \end{aligned} \quad (7)$$

using  $\|G^{-1}\|_2 = \lambda_{\min}(G)^{-1}$ , boundedness of  $f$  ( $f$  continuous on the compact  $\Omega$ , plant class (1)), and  $\Phi_{\max} < \infty$  (Proposition 1). The hypothesis is a pure conditioning requirement: were  $\|\theta^*\|$  unbounded the normal equations would force  $\lambda_{\min}(G) = 0$ , i.e. a nonzero  $v$  with  $\int_{\Omega} |\Phi_{\text{KAN}}^T v|^2 \, dx = 0$  and hence a linear dependence  $\Phi_{\text{KAN}}^T v \equiv 0$  among the features — contradicting their independence.  $\square$

*Remark.* In practice the constant is read directly off the frozen distilled coefficients:  $\|\theta^*\| \approx 12.3$  for the primary channel (2.9 for the secondary), so  $\theta_{\max} \approx 12.3$  — mirroring how the integral bound  $\bar{d}$  is read off logged data (Lemma 2). The conditioning  $\lambda_{\min}(G) > 0$  holds on the reference-varying distillation set of Algorithm 1, where the empirical Gram  $G_N = \frac{1}{N} \sum_i \Phi_{\text{KAN}}(\xi_i) \Phi_{\text{KAN}}(\xi_i)^T$  is full rank. At a single regulation setpoint, by contrast, the error features collapse onto the level features ( $x_5 = c_1 - x_1$ ,  $x_7 = c_3 - x_3$ ,  $x_8 = c_4 - x_4$ ) and  $G_N$  drops to rank seven, so PE is lost — precisely the regime in which the covariance bounding of the RLS gain (Assumption 3) and Corollary 2 operate. The same feature-conditioning  $\lambda_{\min}$  thus wears two hats: bounded below on the distillation set it makes  $\theta^*$  well-posed, while its degeneracy at the operating point is what renders the covariance bound of Assumption 3 load-bearing rather than decorative.

#### 4.2 Standing Conditions

The following conditions are used; each is referenced at the point of use.

**Assumption 1 (Input map)**  $B$  has full column rank at the operating point, so  $B^+ B = I$ .

**Lemma 1 (Lumped disturbance bound)** *The lumped disturbance  $\delta(t) \triangleq \varepsilon_{\text{tv}}(x) + (BB^+ - I)(\cdot) + Br_{\text{slew}}(t) + r_{\text{ukf}}(t)$ , collecting the time-varying approximation error, the underactuation residual, the slew-saturation residual (11), and the state-estimation residual, is uniformly bounded,  $\delta \in \mathcal{L}_{\infty}$ . The constant component of the approximation error  $\varepsilon$  is denoted  $d^*$ , with  $\|d^*\| \leq d_{\max}$ .*

*Proof.* Each of the four components is bounded on the compact set  $\Omega$ . (i) The approximation error  $\varepsilon = f - \Phi_{\text{KAN}}^T \theta^*$  is continuous on  $\Omega$  —  $f$  is continuous on the compact  $\Omega$  (plant class (1)) and  $\Phi_{\text{KAN}}$

is bounded (Proposition 1) and  $\theta^*$  bounded (Proposition 2) — hence bounded, so its time-varying part  $\varepsilon_{\text{tv}} = \varepsilon - d^*$  is bounded. (ii) The underactuation residual  $(BB^+ - I)(\cdot)$  is a fixed projector applied to bounded arguments on  $\Omega$ , hence bounded. (iii) The slew residual  $Br_{\text{slew}}$  is bounded by construction of the rate limiter (11). (iv) The estimation residual  $r_{\text{ukf}}$  is Lipschitz in the estimation error  $e_o$ , which is uniformly bounded by the regional estimator ISS of Lemma 3 below; that lemma rests only on Assumption 4 and is independent of  $\delta$ , so citing it here introduces no circularity. Summing the four finite bounds gives  $\delta \in \mathcal{L}_{\infty}$ .  $\square$

**Assumption 2 (Reference)**  $x_{\text{ref}}, \dot{x}_{\text{ref}}$  are feasible and bounded, so that  $\Omega$  is compact and forward-invariant under the closed loop.

**Assumption 3 (Bounded gain matrix)** *The RLS gain  $\Gamma(t)$  is kept uniformly bounded and uniformly positive definite,  $0 \prec \gamma_{\min} I \preceq \Gamma(t) \preceq \gamma_{\max} I$ , by the forgetting mechanism of Sec. 4.5.2 (with covariance bounding or covariance resetting when persistent excitation is absent).*

**Assumption 4 (Estimator regularity)** *The joint estimator state  $x_{\text{UKF}} = [h_{1, \dots, 4}^T \, \gamma_{1,2}^T]^T$  obeys the augmented dynamics  $\dot{x}_{\text{UKF}} = F(x_{\text{UKF}}, u) + G_w w + G_{\gamma} \dot{\gamma}$ , where  $F$  stacks the level dynamics (2) with the random-walk parameter model ( $\dot{\gamma} \equiv 0$  nominally),  $G_{\gamma} \dot{\gamma}$  injects the true valve drift as an exogenous signal, and the measurement is linear in the levels,  $y = Cx_{\text{UKF}} + \nu$  with  $C = [I_4 \, 0_{4 \times 2}]$ : all four tank levels are sensed, while the valve ratios  $\gamma_{1,2}$  are unmeasured, so the sensor block does not act on the  $\gamma$ -block. Let  $F_x(t) := \int_0^1 \partial_{x_{\text{UKF}}} F(\hat{x}_{\text{UKF}} + s e_o, u) \, ds$  be the averaged state-Jacobian along the estimation error  $e_o := x_{\text{UKF}} - \hat{x}_{\text{UKF}}$  and  $\Theta(\tau, t)$  the state-transition matrix it generates. On the compact envelope  $\Omega \times \mathcal{U}$  (states  $\times$  admissible inputs):*

- (i) (Covariance sandwich) *the filter covariance is uniformly bounded and positive definite,  $\underline{p} I \preceq P(t) \preceq \bar{p} I$  with  $\underline{p}, \bar{p} > 0$  (empirically  $\underline{p} \approx 4.7 \times 10^{-3}$ ,  $\bar{p} \approx 9.6 \times 10^{-2}$  over the benchmark runs, i.e.  $\text{cond}(P) \lesssim 20$ );*
- (ii) (Uniform observability) *the pair  $(F_x(t), C)$  is uniformly completely observable along every admissible trajectory:  $\exists T, \alpha, \bar{\alpha} > 0$  with  $\alpha I \preceq \int_t^{t+T} \Theta^T(\tau, t) C^T R_{\nu}^{-1} C \Theta(\tau, t) \, d\tau \preceq \bar{\alpha} I$ , where  $R_{\nu} \succ 0$  is the measurement covariance;*
- (iii) (Bounded slopes and curvature)  *$\|F_x(t)\| \leq \bar{\alpha}$  and  $\sup_{\Omega} \|\partial^2 F\| \leq \bar{H} < \infty$ , both finite because  $F$  is smooth on the compact  $\Omega$  (the only nonsmooth candidate,  $\partial_h^2 \sqrt{h}$ , stays bounded since the tanks never drain to  $h = 0$ );*
- (iv) (Rate-bounded drift)  *$\|\dot{\gamma}(t)\| \leq \bar{\nu}_{\gamma}$  for a.e.  $t$ , off a finite set of jump instants.*

Condition (ii) is the structural crux: although  $C = [I_4 \ 0]$  reads all four levels, it cannot see  $\gamma$  directly, so the valve ratios are observable only through the multiplicative input channel  $B(\gamma)u$ . At the operating point  $\bar{h} = [10, 10, 2, 2]^\top$ ,  $\bar{\gamma} = [0.43, 0.34]^\top$  with the steady holding input  $\bar{u} \approx [2.6, 1.6]^\top V$ , the discrete observability matrix of  $(F_x, C)$  has full column rank 6 (smallest singular value  $\sigma_{\min} \approx 3.1 \times 10^{-3}$ ), but collapses to rank 4 at  $u \equiv 0$ , losing exactly the two  $\gamma$ -coordinates. Sensing all four levels rather than the  $(h_1, h_2)$  pair of Johansson’s default keeps this recovery well-conditioned —  $\gamma_1$  enters both  $h_1$  and  $h_4$ ,  $\gamma_2$  both  $h_2$  and  $h_3$ , so each ratio is carried by two measured channels. Hence (ii) holds precisely when the inputs persistently excite that channel.

### 4.3 LTV-MPC Design

Linear Time-Varying MPC (LTV-MPC) re-solves at each control step ( $dt = 0.003$  s), re-linearizing about the current state estimate  $\hat{x}_k$ , but discretizes its prediction model at the coarser step  $\Delta t_p = 0.1$  s so that the  $N = 30$  horizon spans  $N\Delta t_p = 3$  s. This decoupling is deliberate: the tank time constants are on the order of tens of seconds, so a horizon discretized at the 3 ms control step ( $N dt = 90$  ms) would be myopic, whereas a 3 s horizon lets the controller anticipate the NMP inverse response. Linearizing (2) about the operating point gives the affine model  $\dot{x} = Ax + Bu + d_{\text{lin}}$ , where  $d_{\text{lin}}$  is the linearization offset, the state Jacobian is

$$A = \begin{pmatrix} -\frac{a_1}{A_1} \sqrt{\frac{g}{2h_1}} & 0 & \frac{a_3}{A_1} \sqrt{\frac{g}{2h_3}} & 0 \\ 0 & -\frac{a_2}{A_2} \sqrt{\frac{g}{2h_2}} & 0 & \frac{a_4}{A_2} \sqrt{\frac{g}{2h_4}} \\ 0 & 0 & -\frac{a_3}{A_3} \sqrt{\frac{g}{2h_3}} & 0 \\ 0 & 0 & 0 & -\frac{a_4}{A_4} \sqrt{\frac{g}{2h_4}} \end{pmatrix}, \quad (8)$$

and the input matrix, following Johansson (2000), is

$$B = \begin{pmatrix} \frac{\gamma_1 k_1}{A_1} & 0 \\ 0 & \frac{\gamma_2 k_2}{A_2} \\ 0 & \frac{(1-\gamma_2)k_2}{A_3} \\ \frac{(1-\gamma_1)k_1}{A_4} & 0 \end{pmatrix}, \quad (9)$$

which has full column rank at the NMP operating point (Assumption 1). Cost weighting follows standard state-input scaling guidelines (Mayne et al., 2000; Borrelli et al., 2017), with the QP solved by OSQP (Stellato et al., 2020): prediction horizon  $N = 30$ ,  $Q = \text{diag}([40, 40, 5, 5])$ , and  $R = \text{diag}([0.001, 0.001])$ . Horizon, cost weights, and constraints are identical across all runs, with no preemptive tuning.

---

### Algorithm 1 Offline KAN distillation of the LTV-MPC policy

---

**Require:** operating set  $\Omega$ , reference set  $\mathcal{R}$ , LTV-MPC policy  $\pi_{\text{MPC}}$ , KAN architecture  
**Ensure:** frozen basis  $\Phi_{\text{KAN}}$ , initial weights  $\theta^*$

- 1:  $\mathcal{D} \leftarrow \emptyset$
- 2: **for** sampled  $(x, x_{\text{ref}}) \in \Omega \times \mathcal{R}$  **do**
- 3:    $\xi \leftarrow \text{NORMALIZE}(x, x_{\text{ref}})$ ;  $u \leftarrow \pi_{\text{MPC}}(x, x_{\text{ref}})$
- 4:    $\mathcal{D} \leftarrow \mathcal{D} \cup \{(\xi, u)\}$
- 5: **end for**
- 6: train KAN B-spline edges  $\Theta$ :  $\min_{\Theta} \sum_{\mathcal{D}} \|\text{KAN}_{\Theta}(\xi) - u\|^2$
- 7:  $\Phi_{\text{KAN}} \leftarrow \text{SYMBOLICEXTRACT}(\Theta)$   $\triangleright$   
    spline  $\rightarrow$  primitive; compose; simplify
- 8:  $\theta^* \leftarrow$  linear coefficients of (12)–(13)
- 9: freeze  $\Phi_{\text{KAN}}$   $\triangleright$  only  $\theta$  adapts online
- 10: **return**  $\Phi_{\text{KAN}}, \theta^*$

---

### 4.4 Offline KAN Distillation

The regressor  $\Phi_{\text{KAN}}$  of (4) is obtained offline by distilling the LTV-MPC policy of Sec. 4.3 into a fixed symbolic basis (Salkimbayev, 2026). The procedure (Algorithm 1) has three stages. First, the LTV-MPC is rolled out across the operating envelope and reference set, producing a labelled dataset  $\mathcal{D} = \{(\xi_i, u_i^{\text{MPC}})\}$  of normalized state/error features  $\xi$  and optimal commands. Second, a KAN with learnable B-spline activations on its edges is trained to imitate the policy,  $\min_{\Theta} \sum_i \|\text{KAN}_{\Theta}(\xi_i) - u_i^{\text{MPC}}\|^2$ . Third, each learned univariate spline is replaced by its best-fit symbolic primitive and the network is composed and simplified, yielding the explicit polynomial law (12)–(13): a finite basis  $\Phi_{\text{KAN}}(\xi) \in \mathbb{R}^p$  ( $p = 10$ ) with linear coefficients  $\theta^*$ . The basis is then frozen; only  $\theta$  adapts online (Sec. 4.5.2). Distillation converts the iterative QP into a constant-time symbolic evaluation while preserving the policy with negligible loss (Salkimbayev, 2026); the present contribution makes this frozen-basis controller adaptive and equips it with the stability certificate of Sec. 4.6. The symbolic law is extracted on normalized inputs and rescaled to physical units at deployment, which ensures benchmark fairness and underlies the regressor bound  $\Phi_{\text{max}}$  of Proposition 1.

### 4.5 Controller Design

#### 4.5.1 Structure of LCA-RLS-KAN

The commanded control is a rate-limited feedforward/adaptive law combined with the proportional-integral (PI) law. The unsaturated command is

$$u_{\text{raw}}(t) = B^+ \left( \dot{x}_{\text{ref}} - \Phi_{\text{KAN}}^T \hat{\theta} - K e(t) - \hat{d}(t) \right), \quad (10)$$

where  $B^+$  is the left pseudoinverse of  $B$  (Assumption 1;  $B \in \mathbb{R}^{4 \times 2}$  has full column rank at the NMP operating

point),  $\dot{x}_{\text{ref}}$  is the feedforward term,  $\Phi_{\text{KAN}}^T \hat{\theta}$  cancels the learned nonlinearity (4),  $K = K_P + \bar{K}_L$  is the total proportional gain (proportional gain  $K_P$  plus the Lipschitz-shaping gain  $\bar{K}_L \triangleq K_L \cdot e/e_{\text{max}}$ , see Sec. 4.5.2), and  $\hat{d}(t)$  is the integral state with dynamics (19). The sign of the regressor and integral terms in (10) is the cancellation sign required by the error dynamics (25); note this corrects the apparent sign of the adaptive and integral terms relative to a naive PI-plus-feedforward template.

The actuator command applied to the plant is the rate-limited form

$$\begin{aligned} u(t_k) &= \text{SlewLim}_{\Delta}(u_{\text{raw}}(t_k)) \\ &:= u(t_{k-1}) + \text{sat}_{[-\Delta, \Delta]}(u_{\text{raw}}(t_k) - u(t_{k-1})), \end{aligned} \quad (11)$$

i.e. the command may change by at most  $\Delta$  volts per step ( $\Delta = 0.1$  V here), which bounds actuator slew and fatigue. The saturation residual  $r_{\text{slew}}(t) := u(t) - u_{\text{raw}}(t)$  satisfies  $\|r_{\text{slew}}\| \leq \Delta$  by construction and enters the loop additively through  $B r_{\text{slew}}$ , absorbed into the lumped disturbance  $\delta$  (Lemma 1). The previously monolithic “Lipschitz term”  $u_L$  is thus resolved into two well-posed objects: a proportional contribution  $-\bar{K}_L e$  folded into  $K$ , and the bounded rate saturation (11); this removes the dimensional inconsistency of treating a slew limit as a length.

To demonstrate the transparency of the KAN architecture, the distilled control law for  $u_1$  and  $u_2$  extracts into a single algebraic form:

$$\begin{aligned} u_{1\text{raw}} &= -0.096827 x_1 - 11.552226 x_2 + 0.240450 x_3 \\ &\quad - 1.444357 x_4 + 3.841384 x_5 + 0.391351 x_7 \\ &\quad + 0.042346 x_8 + 0.025617 (-10.000158 x_1 \\ &\quad - 9.999930)^2 - 0.054467 (-1.670916 x_1 \\ &\quad + 3.952262 x_3 - 3.957915 x_4 + 0.059323 x_8 \\ &\quad - 1.277487)^2 + 1.172892 \end{aligned} \quad (12)$$

$$\begin{aligned} u_{2\text{raw}} &= 0.255780 x_1 - 2.662247 x_2 + 0.507210 x_3 \\ &\quad - 0.526472 x_4 + 0.555852 x_5 + 0.094046 x_7 \\ &\quad - 0.023399 x_8 + 0.005775 (-10.000158 x_1 \\ &\quad - 9.999930)^2 + 0.099910 (-1.670916 x_1 + \\ &\quad 3.952262 x_3 - 3.957915 x_4 + 0.059323 x_8 \\ &\quad - 1.277487)^2 - 0.470107 \end{aligned} \quad (13)$$

where  $x_1$  is the normalized height of tank 1 ( $h_1$ ),  $x_2$  is the normalized height of tank 2 ( $h_2$ ),  $x_3$  is the normalized height of tank 3 ( $h_3$ ),  $x_4$  is the normalized height of tank 4 ( $h_4$ ),  $x_5$  is the normalized error of tank 1 ( $h_{1\text{target}} - h_1$ ),  $x_6$  is the normalized error of tank 2 ( $h_{2\text{target}} - h_2$ ),  $x_7$  is

the normalized error of tank 3 ( $h_{3\text{target}} - h_3$ ),  $x_8$  is the normalized error of tank 4 ( $h_{4\text{target}} - h_4$ ).

The coefficients in (12)–(13) reveal features structurally unavailable in optimization-based controllers: quadratic coefficients encode NMP coupling in respective pumps and the negative coefficients encode physical damping adjacent to setpoint deviation. The two modes hence provide a multilayered control law, which is specifically designed to handle the inverse response characteristic to the NMP plant configuration.

The modifications ensuring boundedness and ISS are described next.

#### 4.5.2 Lipschitz-Continuous RLS Update Law

On top of the baseline KAN-distilled control law, three modifications enable safe online adaptation.

1) *Weight adaptation.* The linear weight vector  $\hat{\theta}$  is updated by the continuous-time RLS law with forgetting factor  $\lambda$  (Ioannou and Sun, 1996; Slotine and Li, 1991):

$$\dot{\hat{\theta}} = \Gamma \Phi P e, \quad (14)$$

$$\dot{\Gamma} = \rho \Gamma - \Gamma \Phi \Phi^T \Gamma, \quad \rho \approx \frac{1 - \lambda}{T_a}, \quad (15)$$

where  $T_a$  is the adaptation interval and  $0 < \lambda < 1$ . The distilled nonlinear basis is frozen; only the linear weights adapt, so  $\hat{\theta} = \hat{\theta} - \theta^*$  is the weight estimation error (with  $\theta^*$  constant,  $\dot{\hat{\theta}} = \dot{\hat{\theta}}$ ) (Fortescue et al., 1981). The discrete realization used in the implementation is the Joseph-stabilized forgetting-RLS recursion; for the per-pump target  $y_k = \Phi_k^T \theta + \epsilon_k$ ,

$$L_k = \Gamma_{k-1} \Phi_k (\lambda R_k + \Phi_k^T \Gamma_{k-1} \Phi_k)^{-1}, \quad (16)$$

$$\hat{\theta}_k = \hat{\theta}_{k-1} + L_k (y_k - \hat{\theta}_{k-1}^T \Phi_k), \quad (17)$$

$$\Gamma_k = \frac{1}{\lambda} [(I - L_k \Phi_k^T) \Gamma_{k-1} (I - L_k \Phi_k^T)^T + L_k R_k L_k^T], \quad (18)$$

with  $R_k$  the measurement-noise covariance; the discrete covariance  $\Gamma_k$  is the sampled counterpart of the continuous gain  $\Gamma$  in (15) (with  $\rho \approx (1 - \lambda)/T_a$ ), and the Joseph form (18) keeps it symmetric positive definite. To prevent covariance wind-up when PE is absent,  $\Gamma$  is kept within  $[\gamma_{\min} I, \gamma_{\max} I]$  by bounded-gain forgetting / covariance resetting (Assumption 3); constant forgetting alone does not guarantee an upper bound on  $\Gamma$  without excitation.

2) *Integral action with anti-windup.* The integral state  $\hat{d}$  regulates the cumulative deviation from the *setpoint*:

$$\dot{\hat{d}} = K_I e, \quad K_I = k_I I \succ 0, \quad (19)$$

implemented with a standard anti-windup/conditional-integration clamp (Lemma 2): integration is frozen whenever it would push  $\hat{d}$  outside  $[-\bar{d}, \bar{d}]$ . Unlike the weight covariance  $\Gamma$ , the integral gain  $K_I$  is constant, so the update (19) carries no analogue of the forgetting-induced metric decay that damps  $\hat{\theta}$  (Sec. 4.6); boundedness of  $\hat{d}$ , and hence of  $\tilde{d} = \hat{d} - d^*$ , is therefore supplied directly by the clamp rather than by the Lyapunov argument. This also removes any need to tie  $K_I$  to  $P$ : any SPD  $K_I$  may be chosen freely for transient shaping. The error is additionally low-pass filtered before integration to attenuate high-frequency content.

3) *Lipschitz shaping and slew limiting.* Lipschitz continuity of the command is enforced through the deviation-dependent proportional gain  $\bar{K}_L = K_L \cdot e/e_{\max}$  (folded into  $K$  in (10)) together with the per-step rate saturation (11) (Khalil and Grizzle, 2002). This keeps the control law restrained and tractable while bounding actuator fatigue.

### Lemma 2 (Boundedness of the integral state)

*The conditional-integration (anti-windup) law (19) renders the band  $[-\bar{d}, \bar{d}]$  forward-invariant for  $\hat{d}$ , so  $\|\dot{\hat{d}}(t)\| \leq \bar{d}$  for an explicit, known  $\bar{d}$ ,  $\forall t$ , by construction of the update rather than as a consequence of the Lyapunov argument of Sec. 4.6. Together with  $\|d^*\| \leq d_{\max}$  (Lemma 1), the integral-state error obeys the uniform bound  $\|\tilde{d}(t)\| \leq \bar{d} + d_{\max} =: \bar{d}_{\text{tot}} \forall t$ .*

*Proof.* The clamp acts coordinatewise on the accumulation (19): whenever an increment  $K_I e \Delta t$  would carry  $\hat{d}$  outside  $[-\bar{d}, \bar{d}]$ , it is suppressed and  $\hat{d}$  is held at the boundary. Hence  $[-\bar{d}, \bar{d}]$  is positively invariant for  $\hat{d}$  and  $\|\dot{\hat{d}}(t)\| \leq \bar{d}$  for all  $t$ , independently of any Lyapunov estimate. With  $\tilde{d} = \hat{d} - d^*$  and  $\|d^*\| \leq d_{\max}$  (Lemma 1), the triangle inequality gives  $\|\tilde{d}\| \leq \bar{d} + d_{\max} =: \bar{d}_{\text{tot}}$ . Empirically  $\bar{d} = 4.0$  cm suffices: across the Monte-Carlo campaign of Sec. 5 the integral coordinate never exceeds 3.87 cm, so the clamp is rarely active.  $\square$

The complete online cycle — estimation, constant-time inference, rate-limited actuation, and periodic weight adaptation — is summarized in Algorithm 2.

#### 4.5.3 Lyapunov Candidate

The energy function is taken over the tracking and weight errors only,

$$V(\zeta) = \frac{1}{2} e^T P e + \frac{1}{2} \tilde{\theta}^T \Gamma^{-1} \tilde{\theta}, \quad (20)$$

with  $\zeta = [e^T \tilde{\theta}^T]^T$ ,  $e = x - x_{\text{ref}}$  and  $\tilde{\theta}$  the weight estimation error. The integral-state error  $\tilde{d} = \hat{d} - d^*$  is deliberately *excluded* from  $V$ : by Lemma 2 it is already

**Algorithm 2** Online LCA-RLS-KAN control step at time  $t_k$

---

**Require:** frozen  $\Phi_{\text{KAN}}$ , weights  $\hat{\theta}_1, \hat{\theta}_2$ , covariances  $P_1, P_2$ , forgetting  $\lambda$ , slew  $\Delta$ , interval  $T_a$ , UKF

- 1: UKF predict with  $u(t_{k-1})$ ; update with  $z_k \Rightarrow \hat{x}_k = [\hat{h}, \hat{\gamma}]$
- 2:  $\varphi \leftarrow \Phi_{\text{KAN}}(\hat{x}_k, x_{\text{ref}}) \quad \triangleright \mathcal{O}(p)$ , branch-free
- 3:  $u_{\text{raw}} \leftarrow [\hat{\theta}_1^T \varphi, \hat{\theta}_2^T \varphi] \quad \triangleright$  constant-time inference
- 4:  $u(t_k) \leftarrow \text{SlewLim}_{\Delta}(\text{sat}_{[0,12]}(u_{\text{raw}}))$ ; apply to plant
- 5: form PI-corrected target  $u_{\text{tgt}}$  (filtered error + cross-coupling brake)
- 6: **if**  $k \bmod T_a = 0$  **then**
- 7:     **for**  $j \in \{1, 2\}$  **do**
- 8:          $(\hat{\theta}_j, P_j) \leftarrow \text{FF-RLS}(\hat{\theta}_j, P_j, \varphi, u_{\text{tgt},j} - u_j; \lambda)$
- 9:     **end for**
- 10: **end if**

---

uniformly bounded by construction of the anti-windup law, independently of any Lyapunov argument, and it is instead carried into the analysis below as a bounded perturbation acting on the  $(e, \tilde{\theta})$ -subsystem. Since  $P$  and  $\Gamma^{-1}$  (Assumption 3) are symmetric positive definite,  $V$  is positive definite and radially unbounded, and there exist  $c_1, c_2 > 0$  with

$$c_1 \|\zeta\|^2 \leq V(\zeta) \leq c_2 \|\zeta\|^2, \quad (21)$$

i.e.  $V$  satisfies class- $\mathcal{K}_{\infty}$  bounds on the *same* vector  $\zeta$  that the dissipation rate of Sec. 4.6 will control (cf. Khalil and Grizzle (2002, Lemma 4.3)).

#### 4.6 Stability Analysis

Differentiating (20) along the closed-loop trajectories,

$$\dot{V} = e^T P \dot{e} + \tilde{\theta}^T \Gamma^{-1} \dot{\tilde{\theta}} + \frac{1}{2} \tilde{\theta}^T \frac{d}{dt} (\Gamma^{-1}) \tilde{\theta}. \quad (22)$$

With the plant model (4), split the approximation error into its constant and time-varying parts,  $\varepsilon = d^* + \varepsilon_{\text{tv}}(x)$ , with  $d^*$  being the constant bias. Substituting the command (10)–(11) into  $\dot{e}$ , we get:

$$\dot{e} = \dot{x} - \dot{x}_{\text{ref}} = f(x) + B u - \dot{x}_{\text{ref}}; \quad (23)$$

using  $BB^+ \approx I$ , collecting the time-varying terms into the lumped disturbance  $\delta$ :

$$\delta = \varepsilon_{\text{tv}} + (BB^+ - I)(\cdot) + B r_{\text{slew}} + r_{\text{ukf}} \quad (24)$$

of Lemma 1 (so the approximation-error remainder  $\varepsilon - d^* = \varepsilon_{\text{tv}}$  is only one of its four components), and setting  $\theta^* - \hat{\theta} = -\tilde{\theta}$ ,  $d^* - \hat{d} = -\tilde{d}$ , the error dynamics are

$$\dot{e} = -\Phi^T \tilde{\theta} - \tilde{d} - K e + \delta(x), \quad K = K_P + \bar{K}_L. \quad (25)$$



Group the last two exogenous terms into a single effective disturbance:

$$\omega(t) := \delta(x(t), t) - \tilde{d}(t), \quad (26)$$

so that  $\dot{e} = -\Phi^T \tilde{\theta} - Ke + \omega$ . Because  $\tilde{d}$  is bounded by construction of the anti-windup law (Lemma 2) rather than by anything established below,  $\omega$  may be treated as an exogenous bounded signal acting on the  $(e, \tilde{\theta})$ -subsystem:  $\|\omega(t)\| \leq \|\delta\|_\infty + \tilde{d}_{\text{tot}} =: \Delta < \infty$ , uniformly in  $t$ . Since  $\theta^*$  is constant,  $\dot{\tilde{\theta}} = \dot{\theta}$  is given by (14). The gain law (15) yields the inverse-covariance derivative

$$\frac{d}{dt}(\Gamma^{-1}) = \Phi\Phi^T - \rho\Gamma^{-1}. \quad (27)$$

Substituting (25)–(27) into (22), the weight cross-term  $\tilde{\theta}^T \Gamma^{-1}(\Gamma\Phi Pe) = \tilde{\theta}^T \Phi Pe$  cancels  $-e^T P\Phi^T \tilde{\theta}$  exactly (both equal  $e^T P\Phi^T \tilde{\theta}$  by symmetry of  $P$ ), leaving

$$\dot{V} = -e^T PKe + e^T P\omega + \frac{1}{2}\tilde{\theta}^T \Phi\Phi^T \tilde{\theta} - \frac{1}{2}\rho\tilde{\theta}^T \Gamma^{-1} \tilde{\theta}. \quad (28)$$

No cross-term involving  $\tilde{d}$  remains to be cancelled or bounded here, because  $\tilde{d}$  was never placed in  $V$  in the first place (Sec. 4.5.3); its effect on the loop enters only through the bounded forcing term  $\omega$  in (28), exactly as  $\delta$  does. The cross/indefinite terms are bounded by Cauchy–Schwarz and Young’s inequalities. For the disturbance term, with  $\mu > 0$ ,

$$e^T P\omega \leq \lambda_{\max}(P) \|e\| \|\omega\| \leq \frac{\mu}{2} \|e\|^2 + \frac{\lambda_{\max}(P)}{2\mu} \|\omega\|^2. \quad (29)$$

By Proposition 1,  $\frac{1}{2}\tilde{\theta}^T \Phi\Phi^T \tilde{\theta} \leq \frac{1}{2}\Phi_{\max}^2 \|\tilde{\theta}\|^2$ , and combining with the forgetting term,

$$\begin{aligned} & \frac{1}{2}\Phi_{\max}^2 \|\tilde{\theta}\|^2 - \frac{1}{2}\rho\tilde{\theta}^T \Gamma^{-1} \tilde{\theta} \leq \\ & -\frac{1}{2}(\rho\lambda_{\min}(\Gamma^{-1}) - \Phi_{\max}^2) \|\tilde{\theta}\|^2. \end{aligned} \quad (30)$$

This term is exactly the “implicit leakage” of exponential forgetting:  $\Gamma^{-1}$  decaying at rate  $\rho$  contributes a genuine negative-definite term to  $\dot{V}$  through the metric itself (not through any explicit pull-to-zero in  $\tilde{\theta}$ ), provided  $\Gamma^{-1}$  stays bounded away from 0 (Assumption 3). The integrator (19) has no such mechanism —  $K_I$  is constant, so no analogous term arises for  $\tilde{d}$ ; this is precisely why  $\tilde{d}$  is handled by the clamp (Lemma 2) rather than by the Lyapunov dissipation.

Taking the gains scalar,  $K = kI$  with  $k = k_P + \bar{k}_L > 0$ , so  $PK = kP \succ 0$  and  $\lambda_{\min}(PK) = k\lambda_{\min}(P)$  (more generally, it suffices that  $PK + K^T P \succ 0$ ). Requiring the error term to dominate the disturbance cross-term,  $\lambda_{\min}(PK) > \mu/2$ ; choose  $\mu \in (0, 2\lambda_{\min}(PK))$ , set

$\mu = \lambda_{\min}(PK)$ . By Assumption 3,  $\Gamma^{-1}$  is bounded with  $\lambda_{\min}(\Gamma^{-1}) > 0$ , and the damping condition

$$\rho\lambda_{\min}(\Gamma^{-1}) > \Phi_{\max}^2 \quad (31)$$

is enforceable since  $\Phi_{\max}$  is finite (Proposition 1). Collecting (29)–(30), the time derivative satisfies

$$\begin{aligned} \dot{V} & \leq -\left(\lambda_{\min}(PK) - \frac{\mu}{2}\right) \|e\|^2 \\ & -\frac{1}{2}\left(\rho\lambda_{\min}(\Gamma^{-1}) - \Phi_{\max}^2\right) \|\tilde{\theta}\|^2 + \frac{\lambda_{\max}(P)}{2\mu} \|\omega\|^2. \end{aligned} \quad (32)$$

This is a negative-definite term in every component of  $\zeta = (e, \tilde{\theta})$ , with a forcing term bounded uniformly by  $\Delta$  (Lemma 2); the integral channel contributes only through this bounded forcing, never through an unbounded or unaccounted state.

Define

$$\begin{aligned} \alpha & := \min \left\{ \lambda_{\min}(PK) - \frac{\mu}{2}, \frac{1}{2}(\rho\lambda_{\min}(\Gamma^{-1}) - \Phi_{\max}^2) \right\}, \\ \gamma & := \frac{\lambda_{\max}(P)}{2\mu}, \end{aligned} \quad (33)$$

both positive under (31). Then (32) reads  $\dot{V} \leq -\alpha\|\zeta\|^2 + \gamma\|\omega\|^2$ , a dissipation inequality on the *same* state  $\zeta = [e^T \tilde{\theta}^T]^T$  bounded in (21), with  $\omega$  as in (26) satisfying  $\|\omega\|_\infty \leq \Delta$ . The unscented Kalman filter (UKF) estimation residual is treated as a component of  $\delta$  (Lemma 1) and handled by an interconnection (cascade-ISS) argument rather than a separation principle: the estimator subsystem is shown regionally ISS in Lemma 3, and its interconnection with the controller subsystem is closed in Lemma 4.

### Theorem 1 (Stability of LCA-RLS-KAN)

Consider the closed-loop system formed by the plant (1) and the LCA-RLS-KAN controller (10)–(11), (14)–(19), under Proposition 1, Assumptions 1–3, and Lemmas 1 and 2. Let the gains  $P, \Gamma$  be SPD,  $K = kI \succ 0$ , and let  $\tilde{d}$  be implemented with the anti-windup clamp of Lemma 2. If the damping condition (31) holds, then with  $\alpha, \gamma$  in (33) and  $\omega$  as in (26),

$$\dot{V} \leq -\alpha\|\zeta\|^2 + \gamma\|\omega\|^2. \quad (34)$$

By (21),  $V$  is an ISS-Lyapunov function in the sense of Sontag (1989) (cf. Khalil and Grizzle (2002, Def. 4.7, Thm. 4.19)); hence the  $(e, \tilde{\theta})$ -subsystem is Input-to-state stable with respect to  $\omega$ , and  $\zeta = (e, \tilde{\theta})$  is globally uniformly ultimately bounded, converging to the residual set

$$\mathcal{R} = \left\{ \zeta : \|\zeta\| \leq \sqrt{\frac{c_2}{c_1} \frac{\gamma}{\alpha} \Delta} \right\}. \quad (35)$$

The integral-state error  $\tilde{d}$  is bounded independently by  $\tilde{d}_{\text{tot}}$  (Lemma 2), so the full triple  $(e, \tilde{\theta}, \tilde{d})$  remains bounded  $\forall t$ .

*Proof.* The dissipation inequality (34) was assembled in (22)–(33); it remains to convert it into an explicit bound. By the lower bound in (21),  $\|\zeta\|^2 \geq V/c_2$ , so (34) with  $\|\omega\|_\infty \leq \Delta$  gives the scalar comparison inequality

$$\dot{V} \leq -\eta V + \gamma \Delta^2, \quad \eta := \frac{\alpha}{c_2} > 0. \quad (36)$$

The comparison lemma (Khalil and Grizzle, 2002, Lemma 3.4) integrates (36) to

$$V(t) \leq e^{-\eta t} V(0) + \frac{\gamma}{\eta} (1 - e^{-\eta t}) \Delta^2 \leq e^{-\eta t} V(0) + \frac{c_2 \gamma}{\alpha} \Delta^2. \quad (37)$$

Applying  $c_1 \|\zeta\|^2 \leq V(t)$  and  $V(0) \leq c_2 \|\zeta(0)\|^2$  from (21) together with  $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$ ,

$$\|\zeta(t)\| \leq \underbrace{\sqrt{\frac{c_2}{c_1}} \|\zeta(0)\| e^{-\eta t/2}}_{\beta(\|\zeta(0)\|, t) \in \mathcal{KL}} + \underbrace{\sqrt{\frac{c_2}{c_1}} \frac{\gamma}{\alpha} \Delta}_{\kappa(\|\omega\|_\infty) \in \mathcal{K}}. \quad (38)$$

Estimate (38) is exactly an ISS bound — a class- $\mathcal{KL}$  transient in  $(\|\zeta(0)\|, t)$  plus a class- $\mathcal{K}$  function of  $\|\omega\|_\infty$  (Sontag, 1989), (Khalil and Grizzle, 2002, Thm. 4.19). Hence the  $(e, \hat{\theta})$ -subsystem is ISS with respect to  $\omega$ ,  $\zeta$  is GUUB, and

$$\limsup_{t \rightarrow \infty} \|\zeta(t)\| \leq \sqrt{\frac{c_2}{c_1}} \frac{\gamma}{\alpha} \Delta, \quad (39)$$

i.e.  $\zeta$  enters the residual set (35), approached at exponential rate  $\eta/2 = \alpha/(2c_2)$ . The integral coordinate is bounded separately,  $\|\tilde{d}(t)\| \leq \tilde{d}_{\text{tot}}$  for all  $t$  by Lemma 2, so  $(e, \hat{\theta}, \hat{d})$  is bounded while  $(e, \hat{\theta})$  is GUUB.  $\square$

### Lemma 3 (Regional ISS of the joint estimator)

Under Assumption 4, realize the UKF as the output-injection observer

$$\begin{aligned} \dot{\hat{x}}_{\text{UKF}} &= F(\hat{x}_{\text{UKF}}, u) + K_f(t) (y - C\hat{x}_{\text{UKF}}), \\ K_f &= PC^T R_\nu^{-1}. \end{aligned} \quad (40)$$

Then the estimation error  $e_o = x_{\text{UKF}} - \hat{x}_{\text{UKF}}$  is regionally ISS with respect to  $(\nu, \dot{\gamma})$ , with gains uniform over  $\Omega \times \mathcal{U}$ :

$$\|e_o(t)\| \leq \beta_o(\|e_o(0)\|, t) + \rho_o(\|(\nu, \dot{\gamma})\|_\infty) + b_o, \quad (41)$$

for some  $\beta_o \in \mathcal{KL}$ ,  $\rho_o \in \mathcal{K}$ , and a bias floor  $b_o = \mathcal{O}(\bar{H}\bar{p})$  induced by unscented statistical linearization (vanishing as the filter is tightened,  $\bar{p} \downarrow$ , or the plant curvature is mild,  $\bar{H} \downarrow$ ).

*Proof.* Subtracting (40) from the augmented plant and using the mean-value form  $F(x_{\text{UKF}}, u) - F(\hat{x}_{\text{UKF}}, u) = F_x(t) e_o$  (exact, with  $F_x$  as in Assumption 4) gives

$$\dot{e}_o = (F_x - K_f C) e_o + \Delta F_x e_o - K_f \nu + G_w w + G_\gamma \dot{\gamma} + b_{\text{UT}}, \quad (42)$$

where  $\Delta F_x := \hat{F}_x - F_x$  is the gap between the sigma-point (unscented) slope  $\hat{F}_x$  actually used by the filter and the true averaged Jacobian, and  $b_{\text{UT}}$  is the unscented mean bias. By Assumption 4(i),(iii) both are bounded on  $\Omega$ :  $\|\Delta F_x\| \leq \kappa_{\text{UT}} = \mathcal{O}(\bar{H}\sqrt{\bar{p}})$  and  $\|b_{\text{UT}}\| \leq \frac{1}{2} \bar{H} \text{tr } P \leq \frac{1}{2} n \bar{H} \bar{p}$ .

Take  $V_o = e_o^T P^{-1} e_o$ , so  $\bar{p}^{-1} \|e_o\|^2 \leq V_o \leq \underline{p}^{-1} \|e_o\|^2$  by (i). The filter Riccati equation  $\dot{P} = F_x P + P F_x^T + G_w Q_w G_w^T - PC^T R_\nu^{-1} CP$  yields, for the nominal matrix  $\bar{P} := F_x - K_f C$ ,

$$\begin{aligned} \bar{P}^T P^{-1} + P^{-1} \bar{P} + \frac{d}{dt} P^{-1} \\ = -(C^T R_\nu^{-1} C + P^{-1} G_w Q_w G_w^T P^{-1}) \preceq 0. \end{aligned} \quad (43)$$

By the covariance sandwich (i) and uniform observability/controllability (ii), the integral of the right-hand side over the window  $T$  is coercive, so  $\bar{P}(t)$  is uniformly exponentially stable and the nominal flow satisfies  $\dot{V}_o|_{\text{nom}} \leq -c_o V_o$  for some  $c_o > 0$  (Kalman–Bucy observer stability (Jazwinski, 1970)). The perturbation  $\Delta F_x e_o$  is dominated by this margin whenever  $\kappa_{\text{UT}}/\bar{p}$  is a small enough fraction of  $c_o$ ; bounding the remaining terms with Young’s inequality and using that  $K_f = PC^T R_\nu^{-1}$  is bounded (by (i),  $R_\nu \succ 0$ ) gives, for some  $\epsilon \in (0, c_o)$ ,

$$\dot{V}_o \leq -(c_o - \epsilon) V_o + \kappa_1 \|\nu\|^2 + \kappa_2 \|\dot{\gamma}\|^2 + \kappa_3 \|w\|^2 + \kappa_4 \|b_{\text{UT}}\|^2, \quad (44)$$

with every  $\kappa_i < \infty$ . The comparison lemma and the  $V_o$ -sandwich convert (44) into the bound (41), with the constant term collecting the  $b_{\text{UT}}$  contribution as  $b_o = \mathcal{O}(\bar{H}\bar{p})$  and process noise  $w$  folded into the input vector. The estimate is regional because (iii) holds on  $\Omega$ , and uniform over  $\Omega \times \mathcal{U}$  because (ii) holds along *every* admissible trajectory, so  $\beta_o, \rho_o, b_o$  do not depend on the controller substate.  $\square$

*Remark.* The augmented model is affine in the unknown parameters: collecting the square-root outflows of (2) in  $\varphi(h)$  and the known input channels in  $\Psi(u)$ , the level dynamics read  $\dot{h} = \varphi(h) + \Psi(u)\gamma$  — a state-affine system with  $\gamma$  entering linearly. This is exactly the class for which adaptive-observer theory (Marino and Tomei, 1992; Besançon, 2000; Zhang, 2002) guarantees exponentially convergent joint state/parameter estimation that is ISS to measurement noise and to the parameter-variation rate  $\dot{\gamma}$ , under a persistency-of-excitation condition on the regressor  $\Psi(u)$ . That PE requirement is precisely the structural content of Assumption 4(ii) — the valve ratios are unobservable from the level sensors at  $u \equiv 0$  and become uniformly observable when the inputs excite the multiplicative channel — and the same excitation it demands is the regime whose absence is quantified controller-side in Corollary 2. The drift enters Lemma 3 as the standard time-varying-parameter input: the constant-rate valve ramp ( $\dot{\gamma}_1 = -0.0011/\text{s}$ )

is a bounded  $\|\dot{\gamma}\|_\infty$  absorbed by  $\rho_o$ , whereas the mid-run 20% step in  $\gamma_2$  is an impulsive  $\dot{\gamma}$  excluded from (iv) and instead handled as a bounded jump in  $e_o$  that re-engages the  $\beta_o(\cdot, t)$  transient rather than the  $\mathcal{K}$  gain — the ramp/step split mapping cleanly onto the  $\mathcal{K}/\mathcal{KL}$  decomposition of ISS.

**Lemma 4 (Observer-controller feedback)** *Let the UKF residual entering Lemma 1 be Lipschitz in the estimation error,  $\|r_{\text{ukf}}\| \leq L_o \|e_o\|$  on  $\Omega$ . Under Assumption 4, the estimator bound of Lemma 3 holds with gains uniform over  $\Omega \times \mathcal{U}$ , and the closed loop keeps  $(x, u)$  in that compact envelope (Assumption 2). Then the interconnection of the estimator with the ISS controller subsystem of Theorem 1 is ISS, and  $(e, \hat{\theta})$  remains GUUB.*

*Proof.* The controller substate enters the estimator only through  $u = u(\hat{x}, \hat{\theta}, \hat{d})$ , so the interconnection is genuine feedback, not a one-way cascade; two facts collapse it to a cascade in the ISS sense. First, by Lemma 3 the estimator gains  $\beta_o, \rho_o, b_o$  are uniform over  $\Omega \times \mathcal{U}$  and so do not depend on  $(e, \hat{\theta})$  beyond the requirement that  $(x, u)$  remain in the compact envelope, which Assumption 2 guarantees — and which is physical rather than circular here: the tank levels are confined to  $[0, h_{\max}]$  by finite capacity and the commands are saturated to  $[0, 12]$  V, so  $(x, u)$  lies in a fixed compact set independently of the stability argument. Hence  $e_o$  obeys an exogenous-input bound independent of the controller state. Second, by Theorem 1 the controller subsystem is ISS with respect to  $\omega$ , and  $\omega$  depends on the estimator only through  $r_{\text{ukf}}$  with  $\|r_{\text{ukf}}\| \leq L_o \|e_o\|$ . Substituting the uniform estimator bound renders the controller input a class- $\mathcal{K}$  function of  $\|(\nu, \dot{\gamma})\|_\infty$  plus a class- $\mathcal{KL}$  transient and the constant  $L_o b_o$ ; since a cascade of ISS systems with uniform gains is ISS (Sontag, 1989; Khalil and Grizzle, 2002), the interconnection is ISS and (38) holds with  $\Delta$  replaced by the composite gain  $\Delta + L_o \rho_o (\|(\nu, \dot{\gamma})\|_\infty) + L_o b_o$ . The estimator-ISS premise is now *established* (Lemma 3) under the verifiable conditions of Assumption 4 rather than assumed; filter consistency (NIS  $\approx 3.995$ ) and the parameter bounds of Table 5 corroborate the covariance sandwich (i) and the bias floor  $b_o$  empirically.  $\square$

### Corollary 1 (Practical tracking accuracy)

*Suppose the idealized regime in which the entire lumped disturbance vanishes,  $\delta \equiv 0$  — i.e. the distilled basis captures the nonlinearity exactly ( $\varepsilon_{\text{tv}} \equiv 0$ ), the input map is invertible on the operating subspace ( $(BB^+ - I)(\cdot) \equiv 0$ ), the slew limit is inactive ( $r_{\text{slew}} \equiv 0$ ), and the estimator residual is negligible ( $r_{\text{ukf}} \equiv 0$ ) — with no constant bias ( $d^* = 0$ ). The tracking error converges to*

$$\|e(t)\| \lesssim \sqrt{\frac{c_2}{c_1} \frac{\gamma}{\alpha}} \bar{d}_{\text{tot}} \quad \text{as } t \rightarrow \infty. \quad (45)$$

*Exact asymptotic tracking ( $\lim_{t \rightarrow \infty} e(t) = 0$ ) is not claimed here: with a non-leaky integrator (Sec. 4.5.2),*

*$\tilde{d}$  need not vanish even when  $\delta \equiv 0$  — it merely stays constrained. The corollary instead makes explicit that achievable tracking accuracy in the ideal case is a designer-controllable quantity, set directly by the anti-windup bound  $\bar{d}$ : tightening the clamp tightens the guaranteed accuracy, at the usual cost of a less aggressive integrator.*

*Proof.* Let  $\delta \equiv 0$  — i.e. every component of the lumped disturbance vanishes ( $\varepsilon_{\text{tv}} \equiv 0$ ,  $(BB^+ - I)(\cdot) \equiv 0$ ,  $r_{\text{slew}} \equiv 0$ ,  $r_{\text{ukf}} \equiv 0$ ) — with no constant bias ( $d^* = 0$ ). Then by (26),  $\omega = -\tilde{d}$ , so  $\|\omega\|_\infty \leq \bar{d}_{\text{tot}}$  by Lemma 2 alone — the residual disturbance entering the proof is then governed entirely by the tightness of the anti-windup constraint. By (35), we get (45).  $\square$

### Corollary 2 (Robustness to lack of excitation)

*Under the conditions of Theorem 1, the error state remains GUUB even without persistent excitation.*

*Proof.* Assumption 3 supplies the covariance-bounding (resetting) mechanism that enforces  $\gamma_{\min} I \preceq \Gamma(t) \preceq \gamma_{\max} I$ , so  $\Gamma^{-1}$  stays bounded and (31) continues to hold; consequently the bound (32) is unaffected by the loss of excitation. The weight error  $\hat{\theta}$  then merely fails to converge to zero but stays in a bounded set, and ISS of (34) preserves GUUB of  $\zeta$  (Ioannou and Sun, 1996). This is consistent with the persistent-excitation premise of Lemma 3, which is required only to render the estimation error  $e_o$  convergent: even in absence of excitation, the covariance sandwich (Assumption 4(i)) still keeps  $e_o$  uniformly bounded, and it is only this boundedness — entering the controller through the residual  $r_{\text{ukf}}$  — that the present GUUB conclusion invokes.  $\square$

As such, the Lyapunov-based proof is concluded, providing a verification of the robustness claim made earlier.

#### 4.7 Companion Design: $\sigma$ -Modified Integrator

Theorem 1 keeps the integral coordinate outside the Lyapunov certificate, bounding it by construction (Lemma 2). We now show that a single leakage term brings  $\tilde{d}$  inside the guarantee, certifying the full composite state  $z = [e^T \hat{\theta}^T \tilde{d}^T]^T$ . Replace the integral update (19) with the  $\sigma$ -modified law

$$\dot{\tilde{d}} = K_I e - \sigma_I \tilde{d}, \quad \sigma_I > 0, \quad K_I = k_I I \succ 0, \quad (46)$$

and augment the candidate (20) with an integral metric,

$$V_z(z) = \frac{1}{2} e^T P e + \frac{1}{2} \tilde{\theta}^T \Gamma^{-1} \tilde{\theta} + \frac{1}{2} \tilde{d}^T Q_I \tilde{d}, \quad Q_I = Q_I^T \succ 0. \quad (47)$$

The choice  $Q_I = P/K_I$  gives  $Q_I K_I = P$ , so the integral cross-term cancels the  $-e^T P \tilde{d}$  contribution of  $e^T P \dot{e}$

exactly. With  $\tilde{d} = \hat{d} - d^*$  and constant  $d^*$ ,

$$\tilde{d}^T Q_I \dot{\tilde{d}} = \underbrace{\tilde{d}^T P e}_{\text{cancels}} - \sigma_I \tilde{d}^T Q_I \tilde{d} - \sigma_I \tilde{d}^T Q_I d^*, \quad (48)$$

and Young's inequality on the last term,  $-\sigma_I \tilde{d}^T Q_I d^* \leq \frac{\sigma_I}{2} \|\tilde{d}\|_{Q_I}^2 + \frac{\sigma_I}{2} \|d^*\|_{Q_I}^2$ , leaves the negative-definite integral term  $-\frac{\sigma_I}{2} \tilde{d}^T Q_I \tilde{d}$ . Adjoining this to (32),

$$\begin{aligned} \dot{V}_z &\leq -(\lambda_{\min}(PK) - \frac{\mu}{2}) \|e\|^2 \\ &\quad - \frac{1}{2} (\rho \lambda_{\min}(\Gamma^{-1}) - \Phi_{\max}^2) \|\tilde{\theta}\|^2 - \frac{\sigma_I}{2} \lambda_{\min}(Q_I) \|\tilde{d}\|^2 \\ &\quad + \frac{\lambda_{\max}(P)}{2\mu} \|\delta\|^2 + \frac{\sigma_I}{2} \|d^*\|_{Q_I}^2. \end{aligned} \quad (49)$$

### Theorem 2 (Full-state ISS of $\sigma$ -modification)

Consider the closed loop of Sec. 4.5.1 with (19) replaced by (46) and  $V_z$  as in (47) with  $Q_I = P/k_I$ . Under Proposition 1, Assumptions 1–3, Lemma 1, and the damping condition (31), define

$$\begin{aligned} \alpha_z &:= \min \left\{ \lambda_{\min}(PK) - \frac{\mu}{2}, \right. \\ &\quad \left. \frac{1}{2} (\rho \lambda_{\min}(\Gamma^{-1}) - \Phi_{\max}^2), \frac{\sigma_I}{2} \lambda_{\min}(Q_I) \right\} > 0 \end{aligned} \quad (50)$$

and  $\varpi := (\delta, d^*)$ . Then  $\dot{V}_z \leq -\alpha_z \|z\|^2 + \gamma_z \|\varpi\|^2$ , where  $\gamma_z$  collects the two forcing constants of (49). Hence  $z = [e^T \tilde{\theta}^T \tilde{d}^T]^T$  — now including the integral coordinate — is ISS with respect to  $\varpi$  and GUUB, converging to a residual set of radius  $\sqrt{(c'_2/c'_1)(\gamma_z/\alpha_z)} \|\varpi\|_\infty$ , with  $c'_1, c'_2$  the class- $\mathcal{K}_\infty$  bound constants of  $V_z$ .

*Proof.* Equation (49) is a dissipation inequality of the same form as (34) with  $(z, V_z, \alpha_z, \gamma_z)$  in place of  $(\zeta, V, \alpha, \gamma)$ ; the comparison-lemma argument (36)–(39) then applies verbatim.  $\square$

The  $\sigma_I$  leak trades exact integral action for a bounded steady-state offset of order  $\sigma_I$  (the constant  $\frac{\sigma_I}{2} \|d^*\|_{Q_I}^2$ ), the standard  $\sigma$ -modification trade-off (Ioannou and Sun, 1996). Theorem 1 (constrained) and Theorem 2 ( $\sigma$ -modified) are thus two consistent robustifications of the same controller: the former bounds  $\tilde{d}$  by construction, the latter by dissipation. The implementation of Sec. 4.5.2 uses the clamped form; (46) is the variant whose certificate extends to the integral state itself.

## 5 Results & Discussion

Simulations were conducted in Python 3.12.4 over a 50 s horizon ( $T_s = 3$  ms,  $N = 16666$ ) on a Ryzen 7 7840HS laptop. A joint UKF (Kalman, 1960; Wan and Van Der Merwe, 2000; Julier and Uhlmann, 2004) (FilterPy (Labbe, 2014)) estimates the augmented state

$x_{\text{UKF}} = [h_{1..4}, \gamma_{1,2}]$  and is tuned for nominal consistency (NIS  $\approx 3.995$  across all runs). The same estimator and simulation harness are shared by every controller, so reported differences are attributable to the control law alone.

*Baselines.* Three baselines are compared against LCA-RLS-KAN. (i) An **RBF-NN** adaptive controller sharing the identical adaptation harness (joint UKF, forgetting-RLS weight update, slew limit) but replacing the distilled symbolic regressor with a black-box Gaussian radial-basis dictionary; this isolates the effect of the regressor choice. (ii)–(iii) An **LTV-MPC** ( $N = 30$ ,  $Q = \text{diag}(40, 40, 5, 5)$ ,  $R = 10^{-3}I$ , OSQP (Stellato et al., 2020)) in two configurations: warm-started, reusing the previous solution, and cold-restarted, resolving from scratch each step as in a naive per-step redeployment. Both MPC configurations are reported deliberately: the actuator smoothness of MPC turns out to be implementation-dependent, and the contrast is itself diagnostic (Sec. 5.2).

*Monte-Carlo protocol.* Performance is evaluated over a **50-seed Monte-Carlo**. Each seed draws fresh zero-mean process ( $\sigma_0^2 = 10^{-4}$ ) and measurement ( $\sigma_m^2 = 2.37$ ) noise sequences, applied under an identical adversarial schedule (valve  $\gamma_1$  drift  $-0.0011$ /s;  $\gamma_2$  step  $-20\%$  at  $t = 25$  s). All four controllers are run on every seed; we report the median and interquartile range (IQR) over the 50 realizations. This allows us to conduct a genuine sampling study over independent draws.

### 5.1 Tracking and Cross-Coupled Actuation

Table 3 and Fig. 2 report the per-tank IAE distributions. The directly actuated setpoints (tanks 1–3) are tracked most tightly by LTV-MPC, as expected of a controller that explicitly minimizes a quadratic tracking cost on those states. The decisive metric, however, is tank 4: the only level held below its open-loop equilibrium, reachable solely through the cross-coupled  $(1 - \gamma_1)$  pathway of pump 1. Here both MPC configurations let tank 4 deviate further (IAE  $\approx 115$  cm·s), approximately 30% worse than LCA-RLS-KAN and RBF-NN ( $\approx 88$  cm·s); crucially, this gap persists under the 3 s prediction horizon (Sec. 4.3), so it reflects the controller's cost/actuation trade-off rather than a short-sighted horizon. MPC purchases tight tracking of the easy, directly actuated states by engaging the coupled actuation that tank 4 requires improperly. The two adaptive controllers, which identify and invert the actual cross-coupled map online, instead hold tank 4 near setpoint; LCA-RLS-KAN and RBF-NN are statistically indistinguishable there (RBF is marginally ahead). The KAN therefore attains essentially the second-best cross-coupled engagement observed, while winning on every other axis below.

Tracking error (IAE) over 50 Monte-Carlo seeds

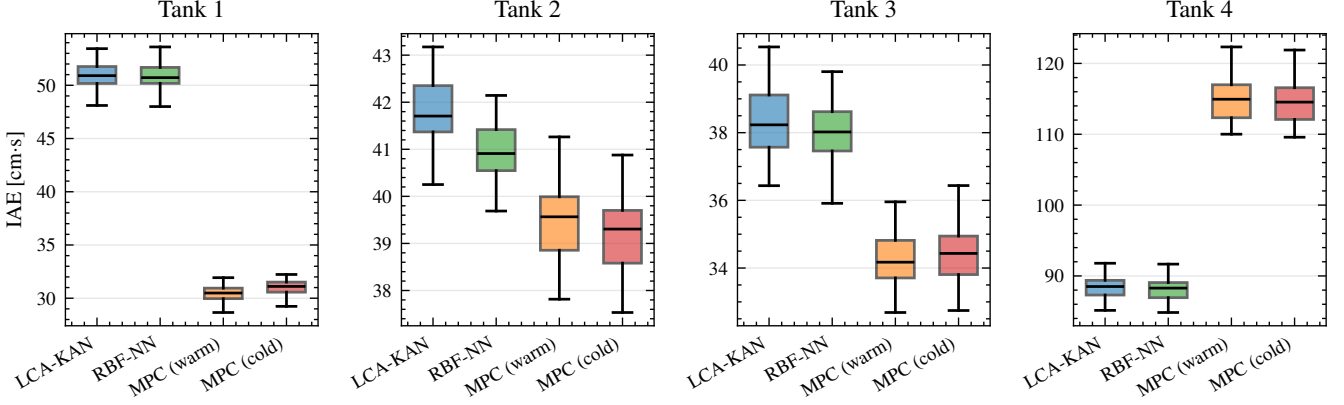


Fig. 2. **Per-tank tracking error (IAE) over 50 Monte-Carlo seeds.** MPC tracks the directly actuated tanks 1–3 tightest but lets the cross-coupled tank 4 deviate further ( $\sim 30\%$  higher IAE); the adaptive controllers (LCA-RLS-KAN, RBF-NN) engage the coupled pathway and hold tank 4 near setpoint.

Table 3  
Monte-Carlo tracking error, IAE [cm·s], median [IQR] over 50 seeds (lower is better).

| Controller     | Tank 1            | Tank 2            | Tank 3            | Tank 4            |
|----------------|-------------------|-------------------|-------------------|-------------------|
| LCA-RLS-KAN    | 50.9 [1.6]        | 41.7 [1.0]        | 38.2 [1.5]        | 88.5 [2.1]        |
| RBF-NN         | 50.7 [1.5]        | 40.9 [0.9]        | 38.0 [1.2]        | <b>88.3</b> [2.1] |
| LTV-MPC (warm) | <b>30.5</b> [1.0] | 39.6 [1.1]        | <b>34.2</b> [1.1] | 114.9 [4.7]       |
| LTV-MPC (cold) | 31.1 [0.9]        | <b>39.3</b> [1.1] | 34.4 [1.1]        | 114.5 [4.5]       |

Table 4  
Monte-Carlo actuator TV [V] and per-step runtime [ms], median [IQR] over 50 seeds.

| Controller     | TV, pump 1        | TV, pump 2        | Runtime [ms]        |
|----------------|-------------------|-------------------|---------------------|
| LCA-RLS-KAN    | <b>1903</b> [204] | <b>1328</b> [284] | <b>1.20</b> [0.045] |
| RBF-NN         | 2168 [161]        | 1437 [151]        | 1.37 [0.066]        |
| LTV-MPC (warm) | 4064 [464]        | 2155 [362]        | 1.48 [0.027]        |
| LTV-MPC (cold) | 6437 [282]        | 3860 [364]        | 1.56 [0.176]        |

## 5.2 Actuator Smoothness, Estimation, and Runtime

Table 4 and Fig. 3 report actuator Total Variation (TV) and per-step runtime. Three observations follow. First, LCA-RLS-KAN has the lowest actuator TV of all four controllers; against the near-identical in tracking RBF baseline it is 12% and 8% smoother on the two pumps, so the structured symbolic regressor yields a smoother command than a black-box basis under identical adaptation. Second, once the LTV-MPC is given a 3 s prediction horizon (Sec. 4.3) it is markedly notably less smooth than KAN: the warm-started configuration chatters at  $1.6\text{--}2.1\times$ , and the cold-restarted one at  $2.9\text{--}3.4\times$ , the KAN’s TV, re-planning aggressively at each 3 ms control step. Parameter estimation (Table 5) is comparable across controllers, as the UKF is shared, with the adaptive controllers marginally ahead on  $\gamma_1$ .

Third, on runtime, all controllers execute in 1.2–1.6 ms/step in this efficient reimplement: the per-step cost is dominated by the shared UKF, and the iterative QP, solved by compiled OSQP, is not the bottleneck a heavier toolchain might make it appear. LCA-RLS-KAN attains the lowest median (1.20 ms), but its decisive advantage is structural rather than average speed: the per-step cost is a fixed, branch-free budget

Actuator TV over 50 seeds

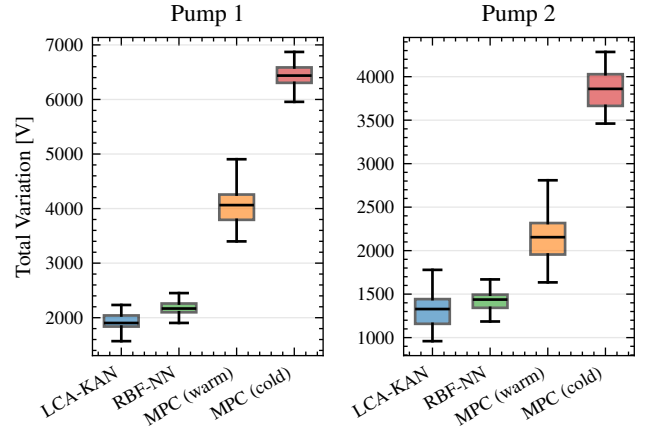


Fig. 3. **Actuator Total Variation over 50 seeds.** LCA-RLS-KAN has the lowest TV of all controllers; given a fair 3 s horizon, both MPC configurations chatter more than the adaptive controllers (warm  $1.6\text{--}2.1\times$ , cold  $2.9\text{--}3.4\times$  the KAN’s TV).

Table 5

Monte-Carlo parameter-estimation error  $|e|$ , median [IQR] over 50 seeds.

| Controller     | $ e_{\gamma_1} $     | $ e_{\gamma_2} $     |
|----------------|----------------------|----------------------|
| LCA-RLS-KAN    | 0.081 [0.009]        | <b>0.165</b> [0.007] |
| RBF-NN         | <b>0.078</b> [0.008] | 0.168 [0.008]        |
| LTV-MPC (warm) | 0.096 [0.015]        | 0.185 [0.018]        |
| LTV-MPC (cold) | 0.097 [0.013]        | 0.185 [0.017]        |

—  $\mathcal{O}(p)$  regressor evaluation ( $p = 10$ ),  $2p$  multiply-adds of inference, and an  $\mathcal{O}(p^2)$  forgetting-RLS update every ten steps — with no solver iterations, tolerance, or factorization, hence a worst-case execution time bounded a priori. The QP cost is instead iteration-count dependent: a warm-started MPC can be made tightly repeatable on a benign run (IQR 0.03 ms here), but the realistic cold-restart case — the one relevant after a reset or fault — is far more variable (IQR 0.18 ms) and admits no a-priori bound. For embedded deployment, where a bounded worst-case execution time matters more than average throughput, this guaranteed determinism is the operative advantage.

### 5.3 Adversarial Stress Test: Single-Realization Disturbance Recovery

Complementing the Monte-Carlo campaign, we illustrate cross-coupled recovery on a single representative realization in which a step disturbance of 2.0 cm is injected into Tank 2 at  $t = 30$  s, on top of the drift schedule, emulating documented industrial faults (valve obstruction, actuator degradation). No controller is re-tuned. The LTV-MPC trajectories are near-identical for the warm- and cold-started configurations on this scenario (the two differ in actuator TV, not in tracking), and make visible the cross-coupling effect that the aggregate IAE of Sec. 5.1 summarizes.

The analysis focuses on tanks 2–4, directly and indirectly affected by the disturbance the most. Both controllers are driven by the same noise realization to isolate differences attributable to the control law. The disturbance response of tank 2 is presented first.

As evidenced by Figure 4, under decaying plant conditions with additional disturbance, LCA-RLS-KAN exhibits faster convergence and reduced steady-state deviation adversarial result is tank 3: shared pump actuation forces simultaneous disturbance rejection on tank 2 and  $h_3$  sustainment — a coupled resource allocation problem under model mismatch.

Under a disturbance applied to tank 2, which simultaneously degrades the inflow pathway to tank 3 in

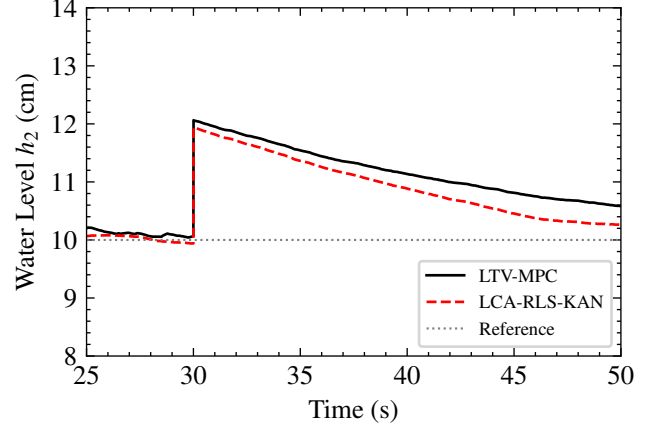


Fig. 4. **Tank 2 level tracking.** At  $t = 30$  s a step disturbance of 2.0 cm is applied, as shown in the plot. The disturbance rejection of two controllers on the affected tank itself is provided; LCA-RLS-KAN exhibits a steadier recovery compared to LTV-MPC.

the quadruple-tank configuration (Johansson, 2000), LCA-RLS-KAN maintains subsystem coherence, having started the restoration of  $h_3$  at  $t \approx 46$  s while LTV-MPC continues to drain  $h_3$  toward zero within the 50-second evaluation window.

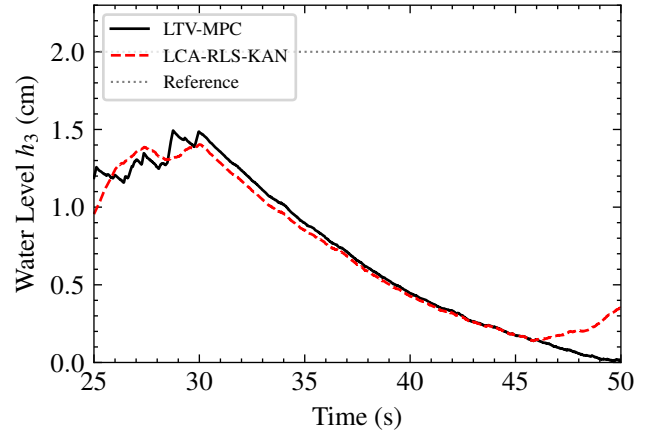


Fig. 5. **Tank 3 level tracking.** As tanks 2 and 3 are interconnected with a single pump, control of tank 3 represents a balancing challenge for both controllers: a necessity to reconcile the setpoint tracking of disturbed tank 2 with the draining of tank 3. The  $h_3$  setpoint (2.0 cm, shared with  $h_4$ ) is shown for reference;  $h_3$  remains well below it throughout (the large tank-3 steady-state error of Table 6), reflecting the underactuated, non-minimum-phase coupling. Near the end of the window LCA-RLS-KAN begins to restore  $h_3$  while LTV-MPC continues to drain.

Despite tank 4 being the upstream contributor to tank 2 inflow (Johansson, 2000), LCA-RLS-KAN tracks tank 4 closer to its reference by achieving superior disturbance rejection on the pump 2 subsystem, indicating stronger coherence of cross-coupled actuation (consistent with Table 4’s reduced TV relative to the RBF baseline).

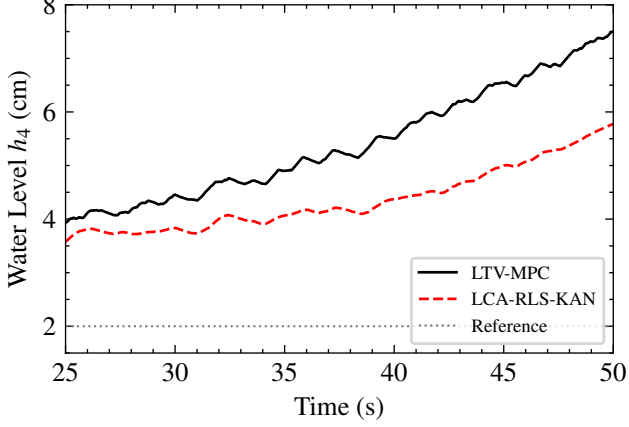


Fig. 6. **Tank 4 level tracking.** Reduced downward flow from tank 3 would increase the voltage needed to maintain the setpoint of tank 1, which in turn causes tank 4 level to rise. Therefore, lower level correlates with higher fidelity of multi-tank control and higher awareness of cross-coupling.

Table 6 provides the IAE and steady-state error (ESS) over the last 5 seconds for both control systems. Time-domain trajectories (Figs. 4, 5, 6) reveal trends not fully captured by ESS values. Thus, simulation campaigns support the claims of efficiency and robustness of the control law.

Table 6

Tracking error metrics for the single-realization disturbance test of Sec. 5 (lower is better).

| Controller  | Tank | IAE [cm · s] | ESS [cm]    |
|-------------|------|--------------|-------------|
| LCA-RLS-KAN | 1    | 56.4         | 1.92        |
| LTV-MPC     |      | <b>34.2</b>  | <b>0.74</b> |
| LCA-RLS-KAN | 2    | <b>57.3</b>  | <b>0.33</b> |
| LTV-MPC     |      | 61.9         | 0.69        |
| LCA-RLS-KAN | 3    | 58.8         | <b>1.79</b> |
| LTV-MPC     |      | <b>58.0</b>  | 1.92        |
| LCA-RLS-KAN | 4    | <b>94.3</b>  | <b>3.33</b> |
| LTV-MPC     |      | 122.4        | 4.97        |

These logs also instantiate the anti-windup bound of Lemma 2. The integral coordinate  $\hat{d}$  — the low-pass-filtered tracking error accumulated in Algorithm 2 — never exceeds 3.87 cm across the 50 seeds and the disturbance realization, so we set  $\bar{d} = 4.0$  cm. With  $d^* = 0$  in the idealized setting of Corollary 1 this gives  $\bar{d}_{\text{tot}} = 4.0$  cm, and the certified residual radius  $\sqrt{(c_2/c_1)(\gamma/\alpha)}\bar{d}_{\text{tot}}$  — no smaller than  $\bar{d}_{\text{tot}}$  for the conservative Lyapunov constants of the proof (metric condition number  $c_2/c_1 \geq 1$ ) — contains the largest steady-state error of the proposed controller (tank 4,  $3.35 \text{ cm} < 4.0 \text{ cm}$ ). Corollary 1 is therefore consistent with the data rather than vacuous.

The same logs instantiate the lack-of-excitation guarantee of Corollary 2. The empirical feature Gram  $G_N = \frac{1}{N} \sum_k \Phi_{\text{KAN}}(\xi_k) \Phi_{\text{KAN}}(\xi_k)^T$  accumulated over the benchmark trajectories has numerical rank seven of ten: regulation to a single setpoint forces the normalized error features onto the level features ( $x_5 = c_1 - x_1$ ,  $x_7 = c_3 - x_3$ ,  $x_8 = c_4 - x_4$ , with  $c_1 = 0.5$  and  $c_3 = c_4 = 0.1$  — the  $[10, 10, 2, 2]$  cm setpoint scaled by the 20 cm level normalization), collapsing three directions so that the regressor is not persistently exciting. The closed loop is GUUB nonetheless — the valve drift is tracked and the step disturbance rejected (Table 6) — because the certificate of Sec. 4.6 never assumed PE: the covariance bound (Assumption 3) keeps  $\Gamma \in [\gamma_{\min} I, \gamma_{\max} I]$  regardless, and Corollary 2 converts that into GUUB of  $\zeta$ . Only the output-relevant weight combination — the excited, rank-seven subspace — is adapted; the three unexcited directions do not affect the command and need not be identified. Parameter convergence is therefore neither claimed nor required: the single-setpoint regulation of the benchmark is itself a worst case for excitation, and the controller is by design indifferent to it.

#### 5.4 Limitations

Several limitations qualify these results and are stated plainly.

- *Runtime parity, not dominance.* Per-step median runtimes are comparable against an efficient solver (KAN lowest, 1.20 ms); the operative advantage is a branch-free, *a-priori*-bounded worst case, not raw throughput. A warm-started MPC can itself be tightly repeatable on a benign run, so the claim rests on that structural bound rather than on observed variance alone.
- *Frozen basis.* Only the linear weights adapt online; plant changes whose effect lies outside the span of the distilled basis are absorbed merely as a bounded disturbance  $\delta$  (Lemma 1) rather than learned.
- *Estimator scope.* The estimator ISS underpinning the cascade (Lemma 3) is established regionally on the compact envelope  $\Omega$  under the verifiable conditions of Assumption 4: the covariance sandwich (i) is read off the logged filter covariance, while uniform observability (ii) and the curvature bound (iii) hold structurally for this plant (levels sensed linearly; valve ratios identifiable under input excitation;  $\partial_h^2 \sqrt{h}$  bounded since tanks never drain to  $h = 0$ ). The certificate is deterministic, continuous-time, and carries an unscented-linearization bias floor  $b_o = \mathcal{O}(\bar{H}\bar{p})$ ; a global or mean-square statement for the genuine nonlinear filter (Reif et al., 1999; Xiong et al., 2006) and the effect of hardware sampling are left to future work.
- *Residual offset.* The implemented clamped integrator leaves a bounded steady-state offset (Corollary 1); exact integral action requires the  $\sigma$ -modified variant of Sec. 4.7, which instead incurs a leakage bias.



- *Single benchmark.* Generality is argued through the control-affine class of Sec. 3.1 but demonstrated on one plant; broader empirical validation and hardware-in-the-loop deployment on the target microcontroller are left to future work.

## 6 Conclusion

This paper presented a LCA-RLS-KAN architecture designed to bridge embedded feasibility and advanced nonlinear control. A Lyapunov-based analysis established ISS and GUUB of the tracking and weight errors, with practical tracking accuracy in the ideal (disturbance-free) case shown to be governed directly by the antiwindup clamp on the integral state, and robustness under lack of PE proven. The theoretical guarantees explicitly account for bounded estimation error and a clamped integral action.

The controllers were compared over a 50-seed Monte-Carlo on the quadruple-tank benchmark under an identical adversarial drift schedule, against a black-box RBF adaptive baseline and LTV-MPC in warm- and cold-restarted configurations.

Across the campaign, LCA-RLS-KAN matched the aggregate tracking of LTV-MPC and the RBF baseline while engaging the cross-coupled, non-minimum-phase actuation that MPC under-served — holding the coupled tank approximately 30% closer to setpoint, despite the LTV-MPC baseline possessing a 3 s prediction horizon. It also attained the lowest actuator total variation of all four controllers — a prediction-horizon MPC chatters more, not less, than the distilled symbolic regressor — and the lowest median per-step cost at a branch-free, worst-case-bounded evaluation. Under a single-realization step disturbance, LCA-RLS-KAN preserved subsystem coherence and restored cross-coupled trajectories more effectively within the observed horizon.

Overall, the proposed framework combines lightweight adaptive control structure with interpretable nonlinear symbolic distillation via Kolmogorov-Arnold Networks (KANs), yielding a verifiable and computationally efficient regressive control law suitable for constrained embedded systems.

## References

- Alvarado, I., Limón, D., Muñoz de la Peña, D., Maestre, J.M., Ridao, M.A., Scheu, H., Marquardt, W., Negenborn, R.R., De Schutter, B., Valencia, F., Espinosa, J., 2011. A comparative analysis of distributed MPC techniques applied to the HD-MPC four-tank benchmark. *Journal of Process Control* 21, 800–815.
- Arnold, V.I., 1957. On functions of three variables, in: *Doklady Akademii Nauk, Russian Academy of Sciences*. pp. 679–681.
- Astrom, K.J., Wittenmark, B., 1995. A survey of adaptive control applications, in: *Proceedings of 1995 34th IEEE Conference on Decision and Control*, IEEE. pp. 649–654.
- Besaçon, G., 2000. Remarks on nonlinear adaptive observer design. *Systems & Control Letters* 41, 271–280.
- Borrelli, F., Bemporad, A., Morari, M., 2017. *Predictive control for linear and hybrid systems*. Cambridge University Press.
- Boyd, S., Vandenberghe, L., 2004. *Convex optimization*. Cambridge University Press.
- Brunton, S.L., Proctor, J.L., Kutz, J.N., 2016. Sparse identification of nonlinear dynamics with control (SINDYc). *IFAC-PapersOnLine* 49, 710–715.
- Cruz, G., Renczes, B., Runacres, M.C., Decuyper, J., 2025. State-space Kolmogorov Arnold networks for interpretable nonlinear system identification. *IEEE Control Systems Letters*.
- Diamond, S., Boyd, S., 2016. CVXPY: A Python-embedded modeling language for convex optimization. *Journal of Machine Learning Research* 17, 1–5.
- Fortescue, T., Kershenbaum, L.S., Ydstie, B.E., 1981. Implementation of self-tuning regulators with variable forgetting factors. *Automatica* 17, 831–835.
- Gatzke, E.P., Meadows, E.S., Wang, C., Doyle, III, F.J., 2000. Model based control of a four-tank system. *Computers & Chemical Engineering* 24, 1503–1509.
- Ge, S.S., Hang, C.C., Lee, T.H., Zhang, T., 2013. *Stable adaptive neural network control*. volume 13. Springer Science & Business Media.
- Hose, H., Gräfe, A., Trimpe, S., 2024. Parameter-adaptive approximate MPC: Tuning neural-network controllers without retraining, in: *6th Annual Learning for Dynamics & Control Conference*, PMLR. pp. 349–360.
- Ioannou, P.A., Sun, J., 1996. *Robust adaptive control*. volume 1. PTR Prentice-Hall Upper Saddle River, NJ.
- Jazwinski, A.H., 1970. *Stochastic Processes and Filtering Theory*. Academic Press.
- Jerez, J.L., Goulart, P.J., Richter, S., Constantinides, G.A., Kerrigan, E.C., Morari, M., 2014. Embedded online optimization for model predictive control at megahertz rates. *IEEE Transactions on Automatic Control* 59, 3238–3251.
- Johansson, K.H., 2000. The quadruple-tank process: A multivariable laboratory process with an adjustable zero. *IEEE Transactions on Control Systems Technology* 8, 456–465.
- Julier, S.J., Uhlmann, J.K., 2004. Unscented filtering and nonlinear estimation. *Proceedings of the IEEE* 92, 401–422.
- Kalman, R.E., 1960. A new approach to linear filtering and prediction problems. *Transactions of the ASME—Journal of Basic Engineering* 82, 35–45.
- Khalil, H.K., Grizzle, J.W., 2002. *Nonlinear systems*. 3 ed., Prentice-Hall Upper Saddle River, NJ.
- Kim, T., Girard, A., Kolmanovsky, I., 2025. CIKAN: Constraint Informed Kolmogorov-Arnold networks for autonomous spacecraft rendezvous using Time



- Shift Governor, in: Proceedings of the 7th Annual Learning for Dynamics & Control Conference, PMLR. pp. 1115–1126.
- Kolmogorov, A.N., 1957. On the representations of continuous functions of many variables by superposition of continuous functions of one variable and addition, in: Dokl. Akad. Nauk USSR, pp. 953–956.
- Krstic, M., Kokotovic, P.V., Kanellakopoulos, I., 1995. Nonlinear and adaptive control design. John Wiley & Sons, Inc.
- Labbe, R.R., 2014. Kalman and Bayesian Filters in Python. Chapman & Hall/CRC. URL: <https://github.com/rlabbe/Kalman-and-Bayesian-Filters-in-Python>.
- Lewis, F., Jagannathan, S., Yesildirak, A., 2020. Neural network control of robot manipulators and non-linear systems. CRC Press.
- Liu, Z., Wang, Y., Vaidya, S., Ruehle, F., Halverson, J., Soljačić, M., Hou, T.Y., Tegmark, M., 2024. KAN: Kolmogorov-Arnold networks. arXiv preprint arXiv:2404.19756 .
- Marino, R., Tomei, P., 1992. Global adaptive observers for nonlinear systems via filtered transformations. IEEE Transactions on Automatic Control 37, 1239–1245.
- Mayne, D.Q., Rawlings, J.B., Rao, C.V., Scokaert, P.O., 2000. Constrained model predictive control: Stability and optimality. Automatica 36, 789–814.
- Narendra, K.S., Annaswamy, A.M., 2012. Stable adaptive systems. Courier Corporation.
- Plackett, R.L., 1950. Some theorems in least squares. Biometrika 37, 149–157.
- Reif, K., Günther, S., Yaz, E., Unbehauen, R., 1999. Stochastic stability of the discrete-time extended kalman filter. IEEE Transactions on Automatic Control 44, 714–728.
- Salkimbayev, A., 2026. Symbolic Kolmogorov–Arnold networks as a constant-time alternative to linear time-varying model predictive control for embedded control of non-minimum phase systems. Engineering Applications of Artificial Intelligence. Under review.
- Sanner, R.M., Slotine, J.J.E., 1991. Gaussian networks for direct adaptive control, in: 1991 American Control Conference, IEEE. pp. 2153–2159.
- Skogestad, S., Postlethwaite, I., 2005. Multivariable feedback control: analysis and design. John Wiley & Sons.
- Slotine, J.J.E., Li, W., 1991. Applied nonlinear control. Prentice-Hall Englewood Cliffs, NJ.
- Sontag, E.D., 1989. Smooth stabilization implies coprime factorization. IEEE Transactions on Automatic Control 34, 435–443.
- Stellato, B., Banjac, G., Goulart, P., Bemporad, A., Boyd, S., 2020. OSQP: An operator splitting solver for quadratic programs. Mathematical Programming Computation 12, 637–672.
- Wan, E.A., Van Der Merwe, R., 2000. The Unscented Kalman Filter for nonlinear estimation, in: Proceedings of the IEEE 2000 Adaptive Systems for Signal Processing, Communications, and Control Symposium (Cat. No.00EX373), IEEE. pp. 153–158.
- Xiong, K., Zhang, H.Y., Chan, C.W., 2006. Performance evaluation of UKF-based nonlinear filtering. Automatica 42, 261–270.
- Zhang, Q., 2002. Adaptive observer for multiple-input-multiple-output (MIMO) linear time-varying systems. IEEE Transactions on Automatic Control 47, 525–529.