

Exam Code: 642-066


Exam Name: Advanced Routing and Switching for Field
Engineers

Vendor: CISCO

Version: DEMO

Part: A

1: Refer to the exhibit. Which Catalyst switch configuration would protect a customer network from possible disruption in the case in which an unauthorized switch is added to the network?

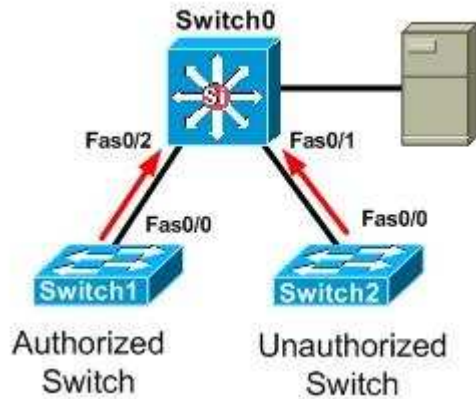

A.Switch0#show running-configuration

!

hostname Switch0

!

no spanning-tree optimize bpdu transmission

spanning-tree extend system-id

!

interface FastEthernet0/1

switchport protected

!

B.Switch0#show running-configuration

!

hostname Switch0

!

spanning-tree portfast bpduguard default

no spanning-tree optimize bpdu transmission

spanning-tree extend system-id

!

interface FastEthernet0/1

spanning-tree guard root

!

C.Switch0#show running-configuration

!

hostname Switch0

!

no spanning-tree optimize bpdu transmission

spanning-tree extend system-id

!

interface FastEthernet0/1

```
switchport mode access
!  
D.Switch0#show running-configuration
!  
hostname Switch0
!  
no spanning-tree optimize bpdu transmission
spanning-tree extend system-id
!  
interface FastEthernet0/1
switchport port-security violation restrict
!
```

Correct Answers: B

2: While troubleshooting a network outage, you discover that an employee brought a switch from home into the office to connect additional equipment to the network. In order to increase his speed, he connected this switch to both network ports in his office, resulting in a bridge loop. Which of these can you implement to prevent future occurrences of this issue?

- A.RSTP
- B.root guard
- C.BPDU guard
- D.GLBP

Correct Answers: C

3: Refer to the exhibit. For the given configuration, on packets leaving the router on interface FastEthernet0/0 that matches the high traffic class, what will the MPLS experimental bit be set to?

- A.0
- B.1
- C.2
- D.3
- E.4
- F.5

Correct Answers: D

4: Which tool allows a LAN client to determine which router should be the first hop to a particular remote destination, allowing simplified client configuration and processing without creating a single point of failure?

- A.Proxy ARP
- B.Dynamic Routing Protocol
- C.IRDP
- D.VRRP

Correct Answers: D

5: When implementing MPLS VPNs between CE and PE routers, which of these statements is

correct?

- A.If using IS-IS as the PE-CE routing protocol, no redistribution is required.
- B.If using static routes between the CE and PE routers, no redistribution of other VPN routes is required.
- C.If the PE-CE protocol is not BGP, redistribution of other VPN routes from MP-BGP is required.
- D.If RIP is the routing protocol that is used between the PE-CE routers, no redistribution is required, but any other protocol will require redistribution.
- E.If using OSPF or EIGRP as the PE-CE routing protocol, redistribution is not required, but any other protocol or static route will require redistribution.

Correct Answers: C

6: You would like to log messages up to the severity level "Notification." Which three of these commands will you need to issue in order to enable syslog messages to be sent to the syslog server at the IP address 10.1.5.5? (Choose three.)

- A.logging on
- B.logging host 10.1.5.5
- C.logging trap notifications
- D.logging syslog notifications
- E.logging monitor notifications
- F.logging console notifications

Correct Answers: A B C

7: Refer to the exhibit. What is the HSRP state and priority of this interface after HSRP reaches its steady state?

```
SB: V111 Grp 11 Tracked interface Port-channel10 Down
SB: V111 Grp 11 Priority 201/251 -> 151/251
SB11: V111 Coup in 172.16.11.111 Standby pri 200 ip 172.16.11.115
SB11: V111 Active: j/Coup rcvd from higher pri router (200/172.16.11.111)
SB11: V111 Active router is 172.16.11.111, was local
SB11: V111 Standby router is unknown, was 172.16.11.111
SB11: V111 Active -> Speak
%STANDBY-6-STATECHANGE: Vlan11 Group 11 state Active -> Speak
SB11: V111 Redundancy "hsrp-V111-11" state Active -> Speak
SB11: V111 Speak: d/Standby timer expired (unknown)
SB11: V111 Standby router is local
SB11: V111 Speak -> Standby
SB11: V111 Redundancy "hsrp-V111-11" state Speak -> Standby
```

- A.Active, Priority 151
- B.Active, Priority 201
- C.Active, Priority 251
- D.Standby, Priority 151
- E.Standby, Priority 201
- F.Standby, Priority 251

Correct Answers: D

8: While your MPLS core is using Cisco routers, the core of a company you have acquired is not. After extending your MPLS VPN networks by integrating the cores, you discover that the

end-to-end LPS path between PE routers cannot be established.

Which of the following may have caused this problem?

- A.the MTUs do not match
- B.the BGP protocol versions do not match
- C.MPLS is not supported between different vendors
- D.MP-BGP is not supported between different vendors
- E.you are using Cisco proprietary TDP in your existing core

Correct Answers: E

9: You are troubleshooting an issue which is causing full-sized packets entering the MPLS cloud to be dropped. You have discovered that one of the switches in the MPLS core is not a Cisco switch, but otherwise the MPLS MTU size is set to 1508 bytes on the routers. Based on this information, which of these may be the reason the packets are being dropped?

- A.no switches support oversized packets
- B.by definition, the maximum MTU is 1500 bytes
- C.the switch on your MPLS core that was not produced by Cisco does not support oversized packets
- D.in this situation, the MTU setting is irrelevant; in MPLS the maximum acceptable IP packet size is 1492 bytes
- E.as MPLS VPN labeling increases the size of the packet by 8 bytes, the IP MTU should have been changed to 1508

Correct Answers: C

10: Refer to the exhibit. Which two of these events will be the result of issuing the above command? (Choose two.)

```
Router(config-vrf) # rd 115:43
```

- A.A 64-bit IPv4 prefix will be created.
- B.The route distinguisher will be used to indicate VPN membership.
- C.Extended BGP communities will be used to encode route distinguishers.
- D.A 96-bit VPNv4 prefix will be created and propagated across the IP network.
- E.The route distinguisher is 64 bits and will be prepended to an existing IPv4 route to make it globally unique.

Correct Answers: D E

11: Refer to the exhibit. You want to minimize the downtime that results from supervisor engine switchovers on Cisco 6500 Series Switches and Cisco 7600 Series Routers. To achieve this, you are considering deploying a Cisco Nonstop Forwarding with Stateful Switchover solution using OSPF.

In the exhibit you can see the output of the show ip ospf neighbor detail command. Which trait of systems using Cisco Nonstop Forwarding with Stateful Switchover and OSPF is shown in the exhibit output and will impact your plan?

- A.Stateful Switchover for Cisco Nonstop Forwarding only works with BGP.
- B.Stateful Switchover for Cisco Nonstop Forwarding must be configured on all adjacent routers.
- C.Cisco Nonstop Forwarding with Stateful Switchover helper mode is not supported on the

adjacent router.

D.Cisco Nonstop Forwarding with Stateful Switchover helper mode for OSPF has been standardized and is supported on the adjacent router.

Correct Answers: D

12: What can be specified in IP VACLs?

A.IP source only

B.IP destination only

C.protocol and IP source only

D.IP source, IP destination, and ports

Correct Answers: D

13: Which two of the following actions must an OSPF NSF-capable router execute after a supervisor engine switchover? (Choose two.)

A.send the graceful restart message

B.exchange the complete routing table

C.re-acquire the link state database content for the network

D.re-learn the available OSPF neighbors with neighbor relationship restart

E.re-learn the available OSPF neighbors without neighbor relationship restart

Correct Answers: C E

14: Cisco Catalyst switches support which three PVLAN port types? (Choose three.)

A.private

B.isolated

C.permanent

D.community

E.non-isolated

F.promiscuous

Correct Answers: B D F

15: What is the function of the no switchport Catalyst switch interface configuration command?

A.switches the port from access mode to trunk mode

B.converts the port from physical Layer 2 port to physical Layer 3 port

C.enables the interface for Layer 2 switching

D.disables the interface to prevent traffic flow

E.clears all the configurations on the interface

Correct Answers: B