

1	2	3	4	5	6	7	8	
A								A
B								B
C								C
D								D
1	2	3	4	5	6	7	8	

REVISION	DATE	COMMENTS
1.0	07/29/2019	initial version
1.1	10/18/2019	Change R2 from 2.4K to 2.49K Update power on strapping configuration
1.2	06/12/2020	Add reserved pull down resistor for CRS/CRS_DV Update PHY address configuration Update PHY symbol and application notes

YT8512 Reference Design V1.2






Sheet Title: <i>TITLE</i>		Drawn By: <i>QWB</i>		
Project Title: <i>YT8512 reference design</i>		Revision: <i>1.2</i> Size: <i>A3</i>		
Designed for:		Sheet <i>1</i> of <i>2</i>		
Number:		Mod. Date: <i>2020/6/12</i>		

YT8512 Reference Design V1.2


REVISION	DATE	COMMENTS
1.0	07/29/2019	initial version
1.1	10/18/2019	Change R2 from 2.4K to 2.49K Update power on strapping configuration
1.2	06/12/2020	Add reserved pull down resistor for CRS/CRS_DV Update PHY address configuration Update PHY symbol and application notes

Sheet Title: <i>TITLE</i>	Drawn By: <i>QWB</i>	
Project Title: <i>YT8512 reference design</i>	Revision: <i>1.2</i>	Size: <i>A3</i>
Designed for:	Sheet <i>1</i> of <i>2</i>	
Number:	Mod. Date: <i>2020/6/12</i>	






25M crystal Calculate the value of external load capacitor according to the crystal load capacitance

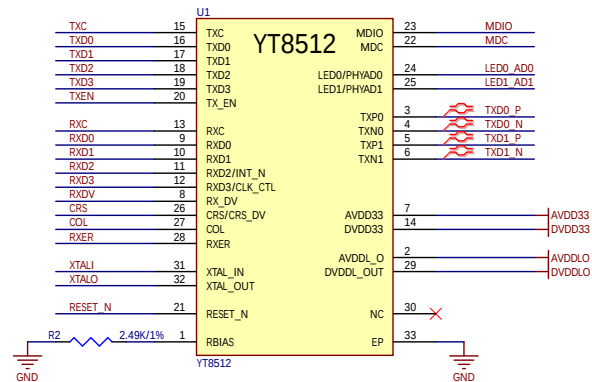

- place R2 close to PHY

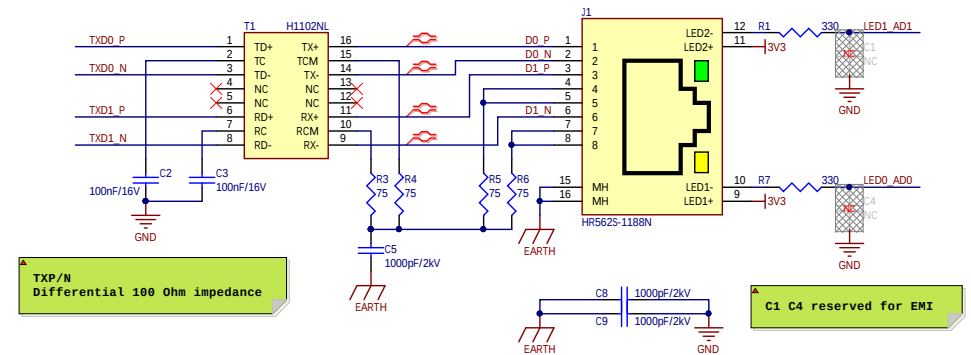

TXP/N
Differential 100 Ohm impedance

C1 C4 reserved for EMI

RX_DV (IPD)	0 = MII mode 1 = RMMII mode
RXD3 (IPD)	0 = TXC output mode 1 = TXC input mode
RXD1 (IPD)	0 = LED mode 1 = WOL mode

LED1/PHYAD1 (IPD)	LED0/PHYAD0 (IPD)	PHY address
0	0	00000
0	1	00001
1	0	00010
1	1	00011

