Discrete Time Systems

July 23, 2015

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Outline

1. **Introduction**

2. Block-diagram

3. State space representation

4. Difference equations

5. Impulse response and convolution

6. Z-transform

7. Observability and controllability

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Discrete Time Signal

Definition

Discrete-time signals are defined only at discrete instants of time.
The value (amplitude) can be either continuous or discrete.
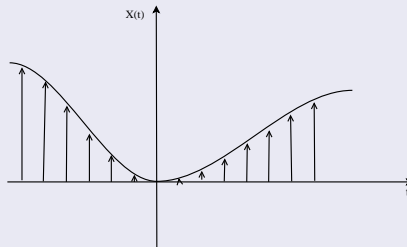$x[k]$ is the value of a signal at the moment $t = kT$

Example

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Discrete Time System

Sampling

The sampling of a continuous time signal replaces the original continuous signal by a sequence of values at discrete time points.
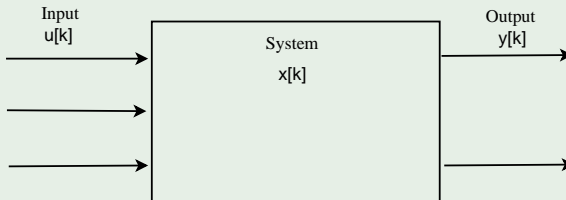
Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Discrete Time System

Definition

A linear time-invariant (LTI) discrete time system processes an input vector $u[k]$ to an output vector $y[k]$.

Example

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Discrete Time System

How to represent a discrete time system?

- Block-diagram
- State space representation
- Difference equation
- Impulse response
- Transfer function

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Outline

1. **Introduction**

2. **Block-diagram**

3. **State space representation**

4. **Difference equations**

5. **Impulse response and convolution**

6. **Z-transform**

7. **Observability and controllability**

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Block-diagram
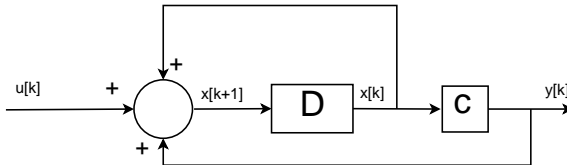
Definition

A block-diagram is a visual representation of a system. All LTI's (Linear Time Invariant) systems can be constructed using 3 building blocks (memory element, summation element and multiplication element). Note that every memory element corresponds to one state variable.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Building blocks

Adder

x1[k]

+
x1[k]+x2[k]

x2[k]

+

Constant Multiplier

x[k]   r   r*x[k]

Delay element

x[k+1]   D   x[k]

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example: compound interest

- $u[k]$:The deposits and withdrawals from the bank account
- $x[k]$:The current balance of the bank account(before deposit and interest)
- $y[k]$: The acquired interest of that year
- $x[k+1]$: The 'next year' balance of the bank account $=$ current balance $+$ interest $+$ deposits - withdrawals

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Bad block-diagrams

Delay-free loops

The issue is that this leads to an implicit connection. $y[k]$ depends on $y[k]$,which is not yet known. You can easily rewrite this in an allowed shape $y[k] = u[k] + 3y[k] \iff y[k] = -\frac{1}{2}u[k]$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Bad block diagrams

Connecting two outputs without using a sum

The issue is that this can lead to inconsistencies. According to this block diagram the output of the systems S1 and S2 are equal.
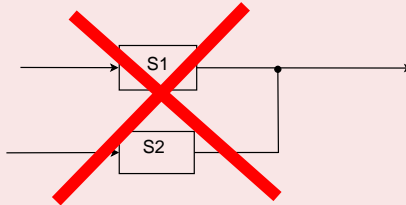
Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Outline

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

State space representation

Definition

State space representation of a LTI system:

$$x[k + 1] = Ax[k] + Bu[k]$$
$$y[k] = Cx[k] + Du[k]$$

State space representation of a LTV system:

$$x[k + 1] = A[k]x[k] + B[k]u[k]$$
$$y[k] = C[k]x[k] + D[k]u[k]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

From block-diagram to state space representation

Block-diagram

State space representation

1. Let the output of the memory elements be $x_i[k]$.

2. So the input of the memory elements are $x_i[k+1]$.

3. Trace back to retrieve equations for $x_i[k+1]$ and $y_i[k]$.

This results in:

$$x[k+1] = 1.05x[k] + u[k]$$
$$y[k] = 0.05x[k]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

From state space representation to block-diagram

Example

$$\begin{bmatrix} x_1[k+1] \\ x_2[k+1] \\ x_3[k+1] \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 0 & 1 \\ 0 & 3 & 0 \end{bmatrix} \begin{bmatrix} x_1[k+1] \\ x_2[k+1] \\ x_3[k+1] \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \\ 4 \end{bmatrix} u[k]$$

$$y[k] = \begin{bmatrix} 5 & 1 & 0 \end{bmatrix} + \begin{bmatrix} 1 \end{bmatrix} u[k]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

From state space space representation to block-diagram

Step 1

First add a delay element for every state $x_i[k]$.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability
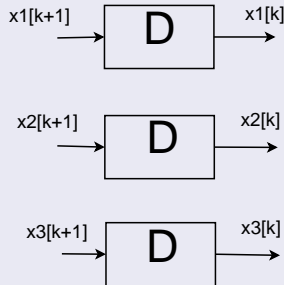
From state space space representation to block-diagram

Step 2

Determine the input for every state $x[k+1]$ from the matrices A and B, as a combination of the states $x_i[k]$ and inputs $u[k]$.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability
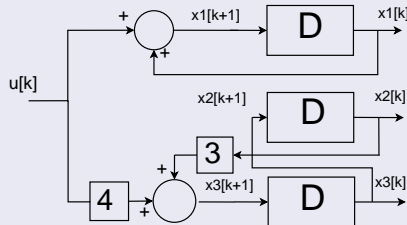
From state space space representation to block-diagram

Step 3

Determine the outputs y[k] in the same way with the matrices C and D.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability
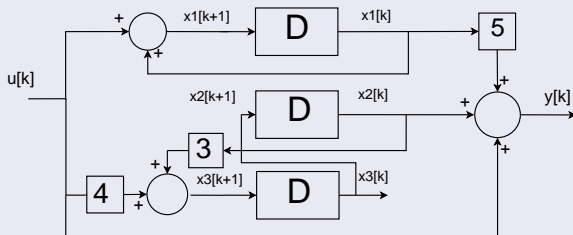
Different state space representations

State space representation is not unique!

Take the following system, which connects u[k] to y[k]:

$$x[k + 1] = Ax[k] + Bu[k]$$
$$y[k] = Cx[k] + Du[k]$$

Now take a non-singular square matrix T and the following system.

$$Tx[k + 1] = TAT^{-1}Tx[k] + TBu[k]$$
$$y[k] = CT^{-1}Tx[k] + Du[k]$$

The relation between u[k] and y[k] will be the same. With
$x' = Tx, A' = TAT^{-1}, B' = TB, C' = CT^{-1}$ and $D' = D$, we have
found a different state space representation for the original system.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Solving state space equation

$$x[k+1] = Ax[k] + Bu[k]$$
$$y[k] = Cx[k] + Du[k]$$

We express $x[1], x[2], \ldots$ in function of $x[0]$ and $u[k]$:

$$x[1] = Ax[0] + Bu[0]$$
$$x[2] = Ax[1] + Bu[1] = A^2x[0] + ABu[0] + Bu[1]$$
$$\vdots$$
$$x[k] = A^kx[0] + \sum_{i=0}^{k-1} A^{k-1-i}Bu[i]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Solving state space equation

The output is $y[k]$:

$$y[k] = \begin{cases} Cx[0] + Du[0] & \text{if } k = 0 \\ CA^k x[0] + \sum\limits_{i=0}^{k-1} CA^{k-1-i} Bu[i] + Du[k] & \text{if } k > 0 \end{cases}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Outline

1. **Introduction**

2. **Block-diagram**

3. **State space representation**

4. **Difference equations**

5. **Impulse response and convolution**

6. **Z-transform**

7. **Observability and controllability**

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Difference equations

Definition

Similar to differential equations, but for discrete time.

General form: $\sum\limits_{i=0}^{n} a_i y[k+i] = \sum\limits_{i=0}^{n} b_i u[k+i]$

With n the order of the system.

Solution in 2 parts

1. Homogeneous: solution with no input
2. Particular: solution derived as a response from the input

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Homogenous difference equations

Definition

General form: $\sum\limits_{i=0}^{n} a_i y[k+i] = 0$

Example

$$y[k+1] - ay[k] = 0$$
$$y[k+1] = ay[k]$$
$$\text{So: } y[1] = ay[0]$$
$$y[2] = ay[1] = a^2 y[0]$$
$$\vdots$$
$$y[n] = a^n y[0]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Homogeneous difference equations

Solution

- Expected form of solution: r^k
- Substitution of the expected solution in the difference equation: $\sum\limits_{i=0}^{n} a_i r^{k+i} = 0$
- Division by r^k leads to the characteristic equation: $\sum\limits_{i=0}^{n} a_i r^i = 0$
- Solutions of the characteristic equation: $r_1, r_2, r_3, \ldots$
- Homogeneous solution to the difference equation:
  $y[k] = c_1 r_1^k + c_2 r_2^k + c_3 r_3^k + \cdots = \sum\limits_{i=1}^{n} c_i r_i^k$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Evariste Galois

Figure: Evariste Galois (25/10/1811 31/5/1832) was a French mathematician born in Bourg-la-Reine. While still in his teens, he was able to determine a necessary and sufficient condition for a polynomial to be solvable by radicals.

Galois Theory

Galois theory provides a answer to the question why there is no formula for the roots of a fifth (or higher) degree polynomial equation in terms of the coefficients of the polynomial, using only the usual algebraic operations (addition, subtraction, multiplication, division) and application of radicals (square roots, cube roots, etc). It also explains why it is possible to solve equations of degree four or lower in the above manner, and why their solutions take the form that they do.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example

- Homogeneous recurrence relations: $y[k+2] - 5y[k+1] + 6y[k] = 0$
- Initial value: $y[0] = 1$, $y[1] = 1$
- Characteristic polynomial: $r^2 - 5r + 6 = 0$
- Roots: 2 and 3
- General solution: $c_1 2^k + c_2 3^k$
- Using the initial values:

$$\left\{ \begin{array}{l} 1 = c_1 + c_2 \\ 1 = 2c_1 + 3c_2 \end{array} \right\}$$
$$\left\{ \begin{array}{l} 2 = c_1 \\ -1 = c_2 \end{array} \right\}$$

- Result: $y[k] = 2^{k+1} - 3^k$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example: Fibonacci sequence

Figure: Leonardo Bonacci (c. 1170 c. 1250) known as Fibonacci was an Italian mathematician, considered to be "the most talented Western mathematician of the Middle Ages".
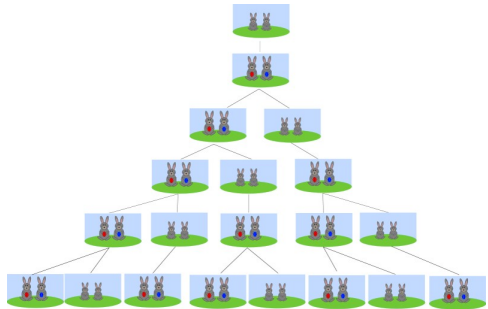

Figure: Fibonacci sequence

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example: Fibonacci sequence

Example

- Homogeneous recurrence relations:
  $y[k+2] = y[k+1] + y[k]$
- Initial value: $y[0] = 1, y[1] = 1$
- Characteristic polynomial: $r^2 - r - 1 = 0$
- Roots: $\frac{1+\sqrt{5}}{2}$ and $\frac{1-\sqrt{5}}{2}$
- General solution: $y[k] = c_1(\frac{1+\sqrt{5}}{2}) + c_2(\frac{1-\sqrt{5}}{2})$
- Initial values:

$$\left\{ \begin{array}{c} c_1 + c_2 = 1 \\ c_1\frac{1+\sqrt{5}}{2} + c_2\frac{1-\sqrt{5}}{2} = 1 \end{array} \right\}$$

$$\left\{ \begin{array}{c} c_1 = \frac{5+\sqrt{5}}{10} \\ c_2 = \frac{5-\sqrt{5}}{10} \end{array} \right\}$$

- Result: $y[k] = (\frac{5+\sqrt{5}}{10})(\frac{1+\sqrt{5}}{2})^k + (\frac{5-\sqrt{5}}{10})(\frac{1-\sqrt{5}}{2})^k$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Multiple roots and complex roots

Multiple roots

For a multiple root r_i with multiplicity m add $r_i^k, kr_i^k, \ldots, k^{m-1}r_i^k$

Complex roots

Complex roots will result in oscillating behaviour. If the difference equations and initial conditions are both real the complex roots can only be present in conjugate pairs, the constants will also be in conjugate pairs.

$$r_i = Re^{j\phi} \quad r_{i+1} = Re^{-j\phi}$$
$$c_i = R_0 e^{j\phi_0} \quad c_{i+1} = R_0 e^{-j\phi_0}$$
$$c_i r_i^k + c_{i+1} r_{i+1}^k = R_0 Re^{jk\phi+j\phi_0} + R_0 Re^{-(jk\phi+j\phi_0)}$$

This can be converted into a cosine and sine using Eulers formula:
$$y[k] = R_0 R\big(\cos(k\phi + \phi_0) + \sin(k\phi + \phi_0)\big) + R_0 R\big(\cos(k\phi + \phi_0) - \sin(k\phi + \phi_0)\big)$$
$$= 2R_0 R\big(\cos(k\phi + \phi_0)\big)$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Eulers formula

Theorem

$e^{j\phi} = \cos(\phi) + \sin(\phi)j$

Proof.

Using power series:

$$
\begin{aligned}
e^{\phi j} &= 1 + jx - \frac{x^2}{2!} - \frac{jx^3}{3!} + \frac{x^4}{4!} + \frac{jx^5}{5!} + \dots \\
&= \left(1 - \frac{x^2}{2!} + \frac{x^4}{4!} + \dots \right) + \left(x - \frac{x^3}{3!} + \frac{x^5}{5!} + \dots \right)j \\
&= \cos(\phi) + \sin(\phi j)
\end{aligned}
$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Leonhard Euler (15/4/1707–18/9/1783) was a pioneering Swiss mathematician and physicist. He made important discoveries in fields as diverse as infinitesimal calculus and graph theory. He also introduced much of the modern mathematical terminology and notation, particularly for mathematical analysis, such as the notion of a mathematical function.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Non-homogeneous difference equations

Definition

$$\sum_{i=0}^{n} a_i y[k+i] = \sum_{i=0}^{n} b_i u[k+i]$$

A linear combination of inputs results in the same linear combination of the outputs resulting from each input individually.

Solution

The equation can thus be solved for each input individually and the results added together afterwards.
The resulting particular solutions can then be added to the general form of the homogeneous solution.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Particular solutions to difference equations

Input $u[k]$	Suggested solution $y[k]$
k	$\alpha_1 k + \alpha_0$
k^n	$\sum\limits_{i=0}^{n} \alpha_i k^i$
a^k	αa^k
$k^n a^k$	$(\sum\limits_{i=0}^{n} \alpha_i k^i) a^k$
$cos(k\phi)$	$\alpha cos(k\phi + \phi_0)$
$a^k cos(k\phi)$	$\alpha a^k cos(k\phi + \phi_0)$
$k^n a^k cos(k\phi)$	$(\sum\limits_{i=0}^{n} \alpha_i k^i \alpha a^k cos(k\phi + \phi_0)$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example

Example

- Difference equation : $y[k+2] - 5y[k+1] + 6y[k] = (-1)^k$
- Initial value: $y[1] = \frac{1}{4}, y[0] = \frac{1}{12}$
- Homogeneous difference equation: $y[k+2] - 5y[k+1] + 6y[k] = 0$
- Characteristic polynomial: $r^2 - 5r + 6 = 0$
- Homogeneous solution: $y_{hom}[k] = c_1 2^k + c_2 3^k$
- Particular solution: $y_{par}[k] = \alpha(-1)^k$
- Substitution: $\alpha(-1)^{k+2} - 5\alpha(-1)^{k+1} + 6\alpha(-1)^k = (-1)^k$
- $\alpha = \frac{1}{12}$
- General solution: $y[k] = c_1 2^k + c_2 3^k + \frac{1}{12}(-1)^k$
- Using the initial values: $c_1 = -\frac{1}{3}, c_2 = \frac{1}{3}$
- Result: $y[k] = -\frac{1}{3} 2^k + \frac{1}{3} 3^k + \frac{1}{12}(-1)^k$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Outline

1. **Introduction**

2. **Block-diagram**

3. **State space representation**

4. **Difference equations**

5. **Impulse response and convolution**

6. **Z-transform**

7. **Observability and controllability**

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Impulse response

Definition

$$\delta[k] = \begin{cases} 1 & \text{if } k = 0 \\ 0 & \text{otherwise} \end{cases}$$

Theorem

You can decompose any signal as follows:

$$f[k] = \sum_{i=-\infty}^{i=\infty} \delta[k-i]f[i] = \delta[k] * f[k]$$
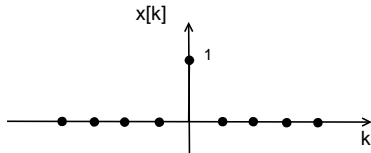
Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Convolution

Definition

$$w[k] = u[k] * v[k] = \sum_{i=-\infty}^{\infty} u[i]v[k-i]$$

Solve

1. Flip v[i] around vertical axis(v[-i]).
2. Slide to the right over k steps(v[k-i]).
3. Multiply $u[i]$ and $v[k-i]$
4. Sum all the values.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Convolution theorem

Theorem

$y[k] = u[k] * h[k]$

Proof.

$$\delta[k] \to h[k]$$
$$\delta[k + i] \to h[k + i]$$
$$u[k] = \sum_{i=-\infty}^{i=\infty} \delta[k - i]u[i] \to \sum_{i=-\infty}^{i=\infty} h[k - i]u[i]$$
$$u[k] \to u[k] * h[k] = y[k]$$

$\square$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability
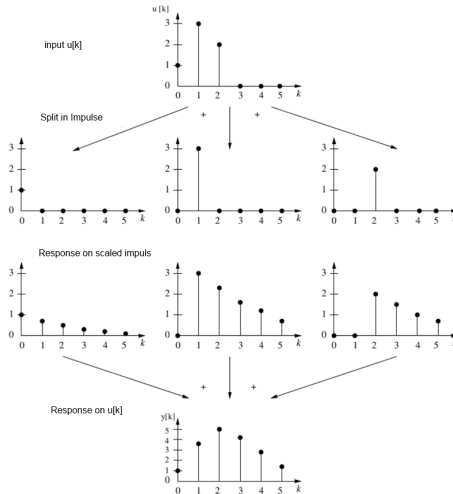
Impulse response

Definition (Impulse response)

The impulse response of a dynamic system is the output when the input is a unit-impulse.

Impulse response

$$h[k] = \begin{cases} 0 & \text{if } k < 0 \\ D & \text{if } k = 0 \\ CA^{k-1}B & \text{if } k > 0 \end{cases}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Examples of Dirac-deltas

Popping balloons for acoustic measurements

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example: Leontief model of a planned economy

- Won the Nobel prize in 1973
- A simple model that assigns values to different sectors
- For simplicity we choose a planned economy. But today governments all over the world are using similar models to model their economy.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability
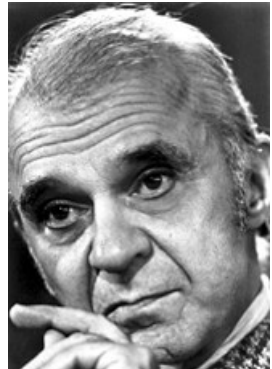
Example: Leontief model of a planned economy

Leontief divided the economy in sectors who buy from each other. The optimal production of some sector this month depends on the demand (external and internal) of the following month. So the system is non causal.

$$x[k-1] = Ax[k] + Bu[k]$$
$$y[k] = Ix[k]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Outline

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Z-transform

Definition

- Discrete equivalent to the Laplace-transform
- Converts time-dependent descriptions of systems to the time-independent Z-domain.
- Simplifies many calculations:
    - Convolution theorem $\rightarrow$ convolution becomes multiplication
    - Linear difference equations become simple algebraic expressions
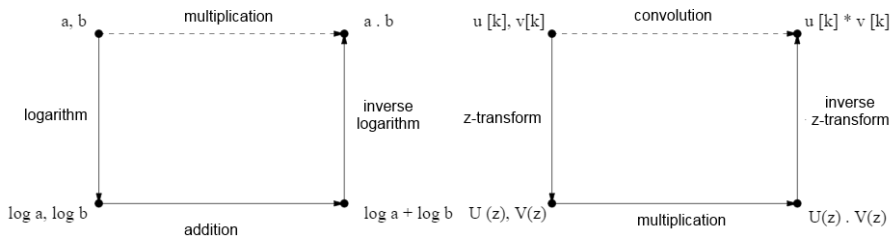   - ...

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Z-transform

2 forms

- Bilateral: Requires knowledge of x for all values of k, including negative values. Can be used for non-causal systems

$$X(z) = \sum_{k=-\infty}^{\infty} x[k]z^{-k}$$

- Unilateral: Only requires knowledge of x for positive values of k. Can only be used for causal systems without loss of information $X(z) = \sum_{k=0}^{\infty} x[k]z^{-k}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Z-transform

Example

$$x[k] = \left\{ \begin{matrix} 1 & -1 & 0 & 2 & 4 \\ & & & \uparrow & \end{matrix} \right\}$$

$$X(z) = \sum_{k=-3}^{1} x[k]z^{-k} = z^3 - z^2 + 2 + 4z^{-1}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Properties Unilateral Z-transform

Property	Time Domain	Z-domain
Linearity	$af_1[n] + bf_2[n] + \ldots$	$aF_1(Z) + bF_2(Z) + \ldots$
Right Shift(m>0)	$f[k-m]$	$z^{-m}F(Z)$
Left Shift (m>0)	$f[k+m]$	$z^m\left(F(z) - \sum_{i=0}^{m-1} f[i]z^{-i}\right)$
Convolution	$f[k] * g[k]$	$F(z)G(z)$
Multiplication by a^k	$a^k f[k]$	$F(a^{-1}z)$
Summation in time	$\sum_{i=0}^{k} f[i]$	$\frac{z}{z-1}F(Z)$
Differentiation in z	$k^m f[k]$	$\left(-z\frac{d}{d}\right)^m F(z)$
Periodic Sequence	$f[k] = f[k+N]$	$F(z) = \frac{z^N}{z^{N-1}} \sum_{k=0}^{N-1} f[k]z^{-1}$
Initial Value	f[0]	$\lim_{|z|\to\infty} F(z)$
Final value	$f[\infty]$	$\lim_{z\to 1}(z-1)F(z)$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

List of common Z-transform pairs

$\delta[k]$	1
$\delta[k-m]$	z^{-m}
1	$\frac{z}{(z-1)}$
a^k	$\frac{z}{(z-a)}$
ka^k	$\frac{az}{(z-a)^2}$
k^2a^k	$\frac{az(z+a)}{(z-a)^3}$
k^3a^k	$\frac{az(z^2+4az+a^2)}{(z-a)^4}$
k^4a^k	$\frac{az(z^3+11az^2+11a^2z+a^3)}{(z-a)^5}$
k^5a^k	$\frac{az(z^4+26az^3+66a^2z^2+26a^3z+a^4)}{(z-a)^6}$
$\frac{(k+1)(k+2)...(k+m)a^k}{m!}$	$\frac{z^{m+1}}{(z-a)^{m+1}}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

List of common Z-transform pairs

$a^k \sin k\omega T$	$\frac{az \sin \omega T}{z^2 - 2az \cos \omega T + a^2}$
$a^k \cos k\omega T$	$\frac{z(z - a \cos \omega T)}{z^2 - 2az \cos \omega T + a^2}$
$\cos(k\omega T + \theta)$	$\frac{z(z \cos \theta - \cos(\omega T - \theta))}{z^2 - 2az \cos \omega T + 1}$
$ka^k \sin k\omega T$	$\frac{z(z - a)(z + a)a \sin \omega T}{(z^2 - 2az \cos \omega T + a^2)^2}$
$ka^k \cos k\omega T$	$\frac{az(z^2 \cos \omega T - 2az + a^2 \cos \omega T)}{(z^2 - 2az \cos \omega T + a^2)^2}$
$a^k \sinh k\omega T$	$\frac{az \sinh \omega T}{z^2 - 2az \cosh \omega T + a^2}$
$a^k \cosh k\omega T$	$\frac{z(z - a \cosh \omega T)}{z^2 - 2az \cosh \omega T + a^2}$
$\frac{a^k}{k!}$	$e^{\frac{a}{z}}$
$\frac{n!}{(n-k)!k!}a^k b^{n-k}$	$\frac{(bz + a)^n}{z^n}$
$\frac{1}{k}$	$\ln\left(\frac{z}{z-1}\right)$
$\frac{k(k-1)(k-2)...(k-m+1)}{m!}$	$\frac{z}{(z-1)^{m+1}}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Region of convergence

Z-transform is not unique

Two different signals could have the same Z-transform over a different region of convergence.

Definition

The region of convergence is the set of complex numbers z for which:
$$\sum_{k=-\infty}^{\infty} \mid x[k]z^{-k} \mid < \infty$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

- We will look at convergence separately for positive and negative k, splitting the convergence criterion in 2:
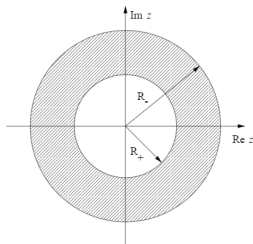
$$k < 0 : | x[k] | \leq M_- R_-^k$$
$$k \geq 0 : | x[k] | \leq M_+ R_+^k$$

- Using $z = re^{j\theta}$ with R+ as small as possible and R- as large as possible we get:

$$\sum_{k=-\infty}^{\infty} | x[k]z^{-k} | = \sum_{k=-\infty}^{\infty} | x[k] | r^{-k}$$

$$= \sum_{k=1}^{\infty} | x[-k] | r^k + \sum_{k=0}^{\infty} | x[k] | r^{-k}$$

$$\leq M_- \sum_{k=1}^{\infty} (R_-^{-1}r)^k + M_+ \sum_{k=0}^{\infty} (R_+ r^{-1})^k$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Region of convergence

The sums are finite if $R_-^{-1}r < 1$ and $R_+ r^{-1} < 1$ Region of convergence: $R_+ < R_-$ R+¡ R-: Ring R-¡ R+: No ROC Causal system, for negative k: $x[k] = 0 \Rightarrow R_- = +\infty$ cannot contain any poles of the system ROC of a stable system always contains the unit circle.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Inverse Z-transform

Inverse Z-transform

1. Split the function into partial fractions
2. Use the table to transform each partial fraction individually to the time domain

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Partial fraction decomposition

1. Factorizing the denominator

2. If all poles(zeros of the denominator) have multiplicity 1:

$$F(z) = \frac{\sum_{i=0}^{n} b_i z^i}{a_n(z - p_1)(z - p_2)\dots(z - p_n)}$$

$$= \alpha_0 + \alpha_1\left(\frac{z}{z - p_1}\right) + \dots + \alpha_n\left(\frac{z}{z - p_n}\right)$$

3. The coefficients can be calculated by:

$$\alpha_0 = F(0) \quad \alpha_i = \left[\frac{z - p_i}{z}F(z)\right]_{z=p_i}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Inverse Z-transform

Partial fraction decomposition

4. If there are poles with multiplicity higher than 1:

$$F(z) = \frac{\sum\limits_{i=0}^{n} b_i z^i}{a_n (z - p_1)^{n_1} (z - p_2)^{n_2} \dots}$$

$$= \alpha_0 + \alpha_1 \left(\frac{z}{z - p_1} \right) + \alpha_2 \left(\frac{z}{z - p_1} \right)^2 + \dots + \alpha_{n_1} \left(\frac{z}{z - p_1} \right)^{n_1}$$

$$+ \beta_1 \left(\frac{z}{z - p_2} \right) + \beta_2 \left(\frac{z}{z - p_2} \right)^2 + \dots \beta_{n_2} \left(\frac{z}{z - p_2} \right)^{n_2}$$

5. Where the highest coefficient for each pole can be calculated by:

$$\alpha_0 = F(0) \quad \alpha_1 = \left[\left(\frac{z - p_1}{z} \right)^{n_1} F(z) \right]_{z = p_1} \quad \beta_1 = \left[\left(\frac{z - p_2}{z} \right)^{n_2} F(z) \right]_{z = p_2}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Inverse Z-transform

Partial fraction decomposition

6. Any remaining coefficients can be found by evaluating the equation for a number of values of z.

$F(z)$	$f[k]$
1	$\delta[k]$
$\frac{z}{z-a}$	a^k
$\frac{z^{m+1}}{(z-a)^{m+1}}$	$\frac{(k+1)(k+2)+...(k+m)a^k}{m!}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Inverse Z-transform

Example

$$F(z) = \frac{z^3 + 2z^2 + z + 1}{z^3 - z^2 - 8z + 12}$$

- The denominator has a zero in 2 (m=2) and -3
- Partial fraction decomposition:

$$\alpha_0 + \alpha_1 \left(\frac{z}{z-2} \right) + \alpha_2 \left(\frac{z}{z-2} \right)^2 + \beta_1 \left(\frac{z}{z+3} \right)$$

- $\alpha_0 = F(0) = \frac{1}{12}$

$$\alpha_2 = \left[\frac{F(z)(z-2)^2}{z^2} \right]_{z=2} = \left[\frac{z^3 + 2z + 1}{z^2(z+3)} \right]_{z=2} = \frac{19}{20}$$

$$\beta_1 = \left[\frac{F(z)(z+3)}{z} \right]_{z=-3} = \left[\frac{z^3 + 2z + 1}{z(z-2)^2} \right]_{z=-3} = \frac{11}{75}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Example

- By evaluating the function for z=1:
  $\frac{5}{4} = \alpha_0 - \alpha_1 + \alpha_2 + \beta/4$
  $\alpha_1 = -9/50$

- Result : $F(z) = \frac{1}{12} - \frac{9}{50}\frac{z}{z-2} + \frac{19}{20}\frac{z^2}{(z-2)^2} + \frac{11}{75}\frac{z}{z+3}$

- Inverse Z-transform:
  $f[k] = \delta[k]/12 + 2^k k \frac{19}{20} + 2^k \frac{77}{100} + (-3)^k \frac{11}{75}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Inverse Z-transform

Another technique for calculating the inverse Z-transform is direct division.

The numerator of the transfer function is divided by the denominator via long division.

Teller

$z^3 + 2z^2 + z + 1$

$\underline{z^3 - z^2 - 8z + 12}$

$\qquad 3z^2 + 9z - 11$

$\qquad \underline{3z^2 - 3z - 24 + 36z^{-1}}$

$\qquad\qquad 12z + 13 - 36z^{-1}$

$\qquad\qquad \underline{12z - 12 - 96z^{-1} + 144z^{-2}}$

$\qquad\qquad\qquad 25 + 60z^{-1} - 144z^{-2}$

$\qquad\qquad\qquad\qquad ...$

Noemer

$z^3 - z^2 - 8z + 12$

$\overline{1 + 3z^{-1} + 12z^{-2} + 25z^{-3} + ... = \displaystyle\sum_{k=0}^{\infty} f[k]z^{-k}}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Solving difference equations with the Z-transform

A system is described by a difference equation of the following form:

$$\sum_{i=0}^{n} a_i y[k+i] = \sum_{i=0}^{n} b_i u[k+i]$$

After the Z-transform:

$$a_0 Y(z) + \sum_{i=1}^{n} a_i z^i \left[Y(z) - \sum_{j=0}^{i-1} y[j] z^{-j} \right] =$$
$$b_0 U(z) + \sum_{i=1}^{n} b_i z_i \left[U(z) - \sum_{j=0}^{i-1} u[j] z^{-j} \right]$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Solving difference equations with the Z-transform

Rearranged:

$$Y(z) = \frac{\sum\limits_{i=1}^{n} b_i z^i}{\sum\limits_{i=1}^{n} a_i z^i} U(z) - \frac{\sum\limits_{i=1}^{n} b_i z^i \left[\sum\limits_{j=0}^{i-1} u[j] z^{-j} \right] - \sum\limits_{i=1}^{n} a_i z^i \left[\sum\limits_{j=0}^{i-1} y[j] z^{-j} \right]}{\sum\limits_{i=1}^{n} a_i z^i}$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Solving difference equations with the Z-transform

We'll apply the following transformation of the double summations:

$$\sum_{i=1}^{n} b_i z^i \sum_{j=0}^{i-1} u[j] z^{-j} = \sum_{s=1}^{n} \sum_{j=0}^{n-s} b_{s+j} u[j] z^s$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability
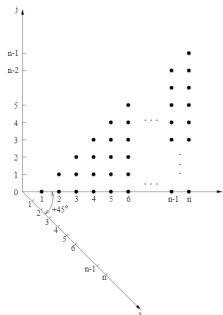
Solving difference equations with the Z-transform

The final simplified result is:

$$Y(z) = \frac{\sum\limits_{i=1}^{n} b_i z^i}{\sum\limits_{i=1}^{n} a_i z^i} U(z) + \frac{\sum\limits_{s=1}^{n} \left(\sum\limits_{j=0}^{n-s} a_{s+j} y[j] - \sum\limits_{j=0}^{n-s} b_{s+j} u[j] \right) z^s}{\sum\limits_{i=1}^{n} a_i z^i}$$

With this result it is easy to find the resulting output from a given input or vice-versa given a difference equation.

Right-hand fraction = output resulting from initial conditions: will vanish with time = transient behaviour

Left-hand fraction = output resulting from input: will remain = steady state response.

$H(z) = \frac{\sum\limits_{i=1}^{n} b_i z_i}{\sum\limits_{i=1}^{n} a_i z_i}$ is the transfer function of the system. This is the z transform of

$h[k]$ (the impulse response)

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

The transfer function can also be derived directly from the state space model of a system:

$$x[k+1] = Ax[k] + Bu[k]$$
$$y[k] = Cx[k] + Du[k]$$

The Z-transform gives:

$$z(X(z) - x[0]) = AX(z) + BU(z)$$
$$Y(z) = CX(z) + DU(z)$$

Rearranged to have $X(z)$ in explicit form:

$$X(z) = (zI - A)^{-1}zx[0] + (zI - A)^{-1}BU(z)$$
$$Y(z) = C(zI - A)^{-1}zx[0] + \left[C(zI - A)^{-1}B + D\right]U(z)$$

If $x[0] = 0$ and $u[k] = \delta[k](U(z) = 1)$:
$H(z) = C(zI - A)^{-1}B + D$
$Y(z) = H(z)U(z)$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Z-Transform

Definition

A pole p_i of the is system is a point in the complex z-plane where $H(p_i) = \pm\infty$ i.e. the denominator becomes zero.

$$\sum_{i=0}^{n} a_i z^i = 0$$

Definition

A zero n_i is a point where $H(n_i) = 0$ i.e. the numerator becomes zero.

$$\sum_{i=0}^{n} b_i z^i = 0$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Link between eigenvalues and poles

Are eigenvalues of A poles of H(z)?

- As z approaches an eigenvalue of A, $(zI - A)^{-1}$ is no longer defined.
- $C(zI - A)^{-1}B$ may still be defined depending on the values of C and B.

Rule 1

An Eigenvalue of A will sometimes, but not always, be a pole of H(z).

Definition

If every eigenvalue of A is also a pole of H(z) then a minimal number of internal states has been achieved.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Link between eigenvalues and poles

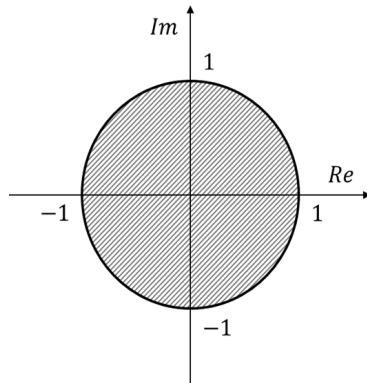### Are poles of H(z) eigenvalues of A?

$H(z) = C(zI - A)^{-1}B + D$

B, C and D are matrices with properly defined values. If H(z) is undefined then $(zI - A)^{-1}$ must be the cause. So, z must be an eigenvalue of A

Rule 2

Poles of H(z) are always eigenvalues of A

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Stability

- Internal Stability
    - All possible internal states return to zero after a finite time in the absence of an input.
    - All eigenvalues of the matrix A are contained within the a circle of radius 1 around zero in the complex plane.
- BIBO-Stability (Bounded-Input Bounded-Output)
    - Every bounded input results in a bounded output
    - All poles are contained within the a circle of radius 1 around zero in the complex plane
    - BIBO-Stability follows from Internal Stability, but the inverse is not necessarily true.
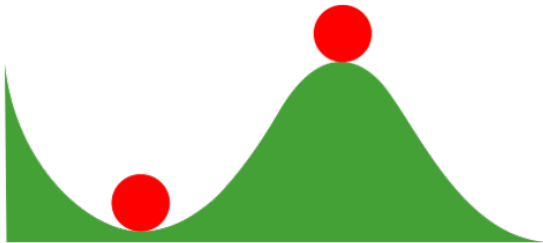
Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Can unstable systems exist?

According to the mathematical models we have discussed unstable systems need an infinite amount of energy.
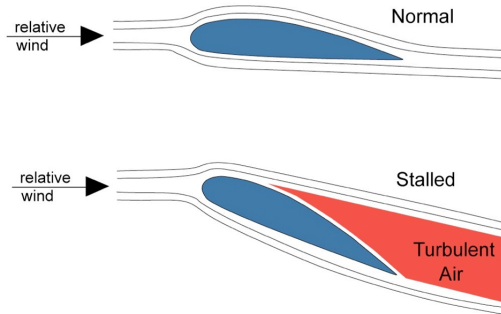
What happens in the real world?

- The system enters a state in which the current linear model is no longer valid (Non linear behaviour) .
- Smaller unaccounted effects become more prominent
- The system malfunctions and may cause damage to itself or its surroundings.
- Something else bad happens

Stability

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Airplane stall

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

- Airplanes generate lift using the Venturi effect.
- Faster moving air has a lower pressure.
- Eddy currents may be created due to a too slow airspeed or too sharp ascent.
- Turbulent airflow causes a loss of the lift generated by the Venturi effect.
- Without the necessary lift an air plane becomes an unstable system.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Buses and other tall vehicles have a
tendency to roll when taking turns too
quickly. A London bus is loaded with
sandbags and must be able to lean at an
angle of at least $28°$ while still returning
all tires to the ground. Modern day car
manufacturers have to pass multiple
tests for stability while manoeuvring

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Steady state behavior via Z-transform

Starting from the previous result:

$$Y(z) = \frac{\sum\limits_{i=1}^{n} b_i z^i}{\sum\limits_{i=1}^{n} a_i z^i} U(z) + \frac{\sum\limits_{s=1}^{n} \left(\sum\limits_{j=0}^{n-s} a_{s+j} y[j] - \sum\limits_{j=0}^{n-s} b_{s+j} u[j] \right) z^s}{\sum\limits_{i=1}^{n} a_i z^i}$$

We wish to find the resulting output from the input:

$u[k] = \cos(k\alpha + \theta)$

To simplify derivation, we use:

$u[k] = e^{j(k\alpha + \theta)}$

With Z-transform: $U(z) = \frac{z e^{j\theta}}{z - e^{j\alpha}}$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Steady state behavior via Z-transform

Filling in $U(z)$ and splitting into partial fractions:

$$
Y(z) = \frac{\sum_{i=1}^{n} b_i z^i}{\sum_{i=1}^{n} a_i z^i} \frac{z e^{j\theta}}{z - e^{j\alpha}} + \frac{\sum_{s=1}^{n} \left(\sum_{j=0}^{n-s} a_{s+j} y[j] - \sum_{j=0}^{n-s} b_{s+j} u[j] \right) z^s}{\sum_{i=1}^{n} a_i z^i}
$$

$$
= \frac{cz}{z - e^{j\alpha}} + \frac{d_1 z}{z - p_1} + \cdots + \frac{d_n z}{z - p_n} + g
$$

Calculating the coefficient c:

$$
c = \left[Y(z) \frac{z - e^{j\alpha}}{z} \right]_{z = e^{j\alpha}} = \left[H(z) e^{j\theta} \right]_{z = e^{j\alpha}} = H(e^{j\alpha}) e^{j\theta}
$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Steady state behavior via Z-transform

After the inverse Z-transform:

$$y[k] = H(e^{j\alpha})e^{j(k\alpha+\theta)} + d_1 p_1^k + \cdots + d_n p_n^k + g\delta[k]$$
$$= \mid H(e^{j\alpha}) \mid e^{j(k\alpha+\theta+\angle H(e^{j\alpha}))} + d_1 p_1^k + \cdots + d_n p_n^k + g\delta[k]$$

Because of linearity we can ignore the imaginary component, leading to the result:

$$y[k] =$$
$$\underbrace{\mid H(e^{j\alpha}) \mid cos(k\alpha + \theta + \angle H(e^{j\alpha}))}_{\text{staedy state}} + \underbrace{Re(d_1 p_1^k + \cdots + d_n p_n^k + g\delta[k])}_{\text{transient behavure}}$$

Input	Output
$cos(k\alpha + \theta)$	$\mid H(e^{j\alpha}) \mid cos(k\alpha + \theta + \angle H(e^{j\alpha}))$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Steady state behavior via Z-transform

Example

- $u[k] = cos(3k + \pi) \Rightarrow \alpha = 3 \quad \theta = pi$

- $H(z) = \frac{z^2+4}{(z^2+6)(z-1)}$

- $H(e^{3j}) = 0.357e^{0.055j}$

- The resulting output has been reduced to a third in amplitude and has undergone a small phase shift.
  $y[k] = 0.357 \cos(3k + \pi + 0.055)$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
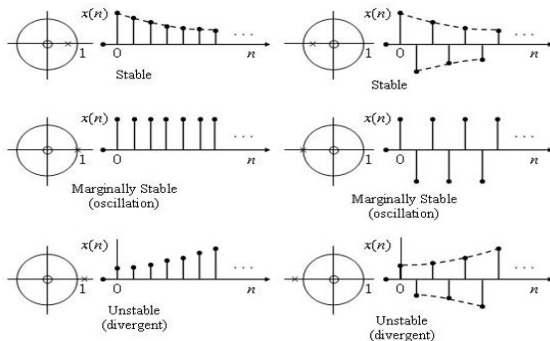Observability and controllability

Complex Eigenvalues

As with the roots to the characteristic equation in difference equations, complex and/or negative eigenvalues for A create oscillation. $\|\lambda\| < 1$: The oscillation will decrease in magnitude: stable $\|\lambda\| > 1$: The oscillation will increase in magnitude: unstable $\|\lambda\| = 1$: The oscillation will maintain the same magnitude indefinitely: unstable
The smallest achievable period is 2 times the step time, for negative real eigenvalues.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Complex Eigenvalues

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

## Outline

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Observability and controllability

Not controllable   Not observable

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Observability

A system is observable if every initial state $x[0]$ can be determined from the observation of y[k].

The state space model without inputs gives us:

$x[k + 1] = Ax[k]$ $\qquad$ $y[k] = Cx[k]$

Now we can determine a set of vector equations in $x[0]$

$x[1] = Ax[0], x[2] = A^2x[0], \ldots, x[n-1] = A^{n-1}x[0]$

If the system has n internal states then n equations are needed:

$y[0] = Cx[0], y[1] = Cx[1] = CAx[0], \ldots, y[n-1] = CA^{n-1}x[0]$

$$
\begin{bmatrix} y[0] \\ y[1] \\ \vdots \\ y[n-1] \end{bmatrix} = \begin{bmatrix} C \\ CA \\ \vdots \\ CA^{n-1} \end{bmatrix} \begin{bmatrix} x_1[0] \\ x_2[0] \\ \vdots \\ x_n[0] \end{bmatrix}
$$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Observability

The system is observable if

$$\begin{bmatrix} C \\ CA \\ \vdots \\ CA^{n-1} \end{bmatrix}$$

has rank n.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

controllable

A system is controllable if it can be brought to a desired state
using the inputs in a finite time.
Again we start from the state space model:
The following equations can be derived:

$x[k + 1] = Ax[k] + Bu[k]$

$x[1] = Ax[0] + Bu[0]$

$x[2] = A^2x[0] + ABu[0] + Bu[1]$

$x[3] = A^3x[0] + A^2Bu[0] + ABu[1] + Bu[2]$

$$\vdots$$

$x[n] = A^nx[0] + A^{n-1}Bu[0] + \cdots + Bu[n - 1]$

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Controllability

This last equation can be rewritten as:

$$x[n] - A^n x[0] = \begin{bmatrix} B & AB & \dots & A^{n-1}B \end{bmatrix} \begin{bmatrix} u[n-1] \\ u[n-2] \\ \vdots \\ u[1] \\ u[0] \end{bmatrix}$$

For a given $x[0]$ and a desired $x[n]$ the required inputs can be found by solving this system. $\begin{bmatrix} B & AB & \dots & A^{n-1}B \end{bmatrix}$ is called the controllability matrix of the system. A system is said to be controllable if the set of equations can be solved for a given $x[0]$ and any desired $x[n]$. This is the case if the controllability matrix has a rank n.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Detectability and Stabilizability

Observability and controllability are important terms in control
theory.

Detectability and stabilizability are also often used as weaker
constraints.

A system is detectable if all unstable states are observable.

A system is stabilizable if all unstable states are controllable.

Detectability and stabilizability are also important terms in control
theory.

Introduction
Block-diagram
State space representation
Difference equations
Impulse response and convolution
Z-transform
Observability and controllability

Overview