




INTELLIGENT PDU

FAR MORE THAN A SOCKET STRIP

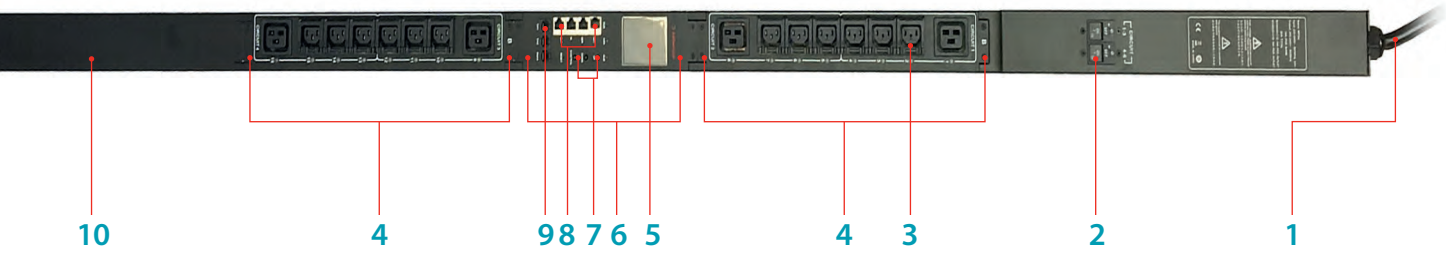

- 1 Input power cord
- 2 Hydraulic circuit breaker
- 3 Output sockets
- 4 Output module (hot-swappable)
- 5 LCD screen
- 6 Control module (hot-swap)
- 7 CONTROL: Confirm and flip button
UP: Scroll up to the previous page
DOWN: Scroll down to the next page
RESET: Reset button
RUN: Operation indicator
KWH: Energy pulse indicator
ALM: Alarm indicator
- 8 NET: 10/100M Ethernet port
SER: Serial port (MODBUS supported)
IN: Daisy-chain port, connect to the OUT port of previous PDU
OUT: Daisy-chain port, connect to the IN port of next PDU
- 9 T/H1: Temperature and humidity sensor port 1
T/H2: Temperature and humidity sensor port 2
Alarm: Audible and visual alarm port
- 10 Space for future expansion (hot-swappable output module)

Product category

	Series - A	Series - B	Series - C	Series - D
MAIN FUNCTIONS	Measurement	Measurement single socket	Measurement switching single socket	Measurement single socket & switching single socket
	Output (kW)	Output (kW)	Output (kW)	Output (kW)
	Voltage (V)	Voltage (V)	Voltage (V)	Voltage (V)
	Current (A)	Current (A)	Current (A)	Current (A)
	Power factor monitoring	Power factor monitoring	Power factor monitoring	Power factor monitoring
	Power consumption (kWh)	Power consumption (kWh)	Power consumption (kWh)	Power consumption (kWh)
	Temperature/humidity monitoring	Temperature/humidity monitoring	Temperature/humidity monitoring	Temperature/humidity monitoring
		Measurement on single socket	On/off single socket	On/off single socket
				Measurement on single socket

#	Model	Installation	Input AMPS	Output socket
1	PDU121-0700A-EN	vertical	16	7x C13
2	PDU151-1806B-EN	vertical	32	18x C13, 6x C19
3	PDU151-1806C-EN	vertical	32	18x C13, 6x C19
4	PDU151-1806D-EN	vertical	32	18x C13, 6x C19

PRODUCT FEATURES

Control module

- . LCD (2.8")
- . Hot-swap design supports in-field maintenance without affecting power supply
- . Web interface, supports HTTP, SSL, DHCP, SNMP V1(V3), Modbus, Telnet, SMTP, NTP
- . User-defined threshold to provide information and take action before overload
- . PDU daisy chain connection for 5 PDUs (1 master, 4 slaves) with single IP
- . Two ports for T/H sensor
- . Can be inverted when PDU is upside down

Power monitoring

- . Monitor input current, voltage, power, energy consumption and power factor
- . Capacity planning
- . Real-time power monitoring (outlet, device and rack).
- . Set use-defined threshold to protect the IT device from overload
- . Create bill to the customer by outlet level power metering

Remote management

- . Ideal for 24x7 coverage and automatic email and SNMP trap when alarm occurs
- . Remote location deployment
- . Firmware is remotely upgradable
- . Allows the user to quickly recycle power to locked-up equipment (without traveling - so minimize costly downtime)

Environmental monitoring

- . Get warning from the overheat spot that could lead to downtime
- . Identify overcooling situations where temperature could be increased - saves energy and cost

Outlet switching

- . Power policy enforcement (ability to switch on/off the server that is not in use or on a weekly basis)
- . Prevent over provisioning (prevent unauthorized equipment installation and save downtime)

Product configuration

	Socket type	Input		Output socket: type-1 (C13)	Output socket: type-2 (C19)		Language
PDU	1	3	1 -	1 8	0 6	B	- EN

- 1 : IEC
- 1 : 16A, C20
2 : 16A, IEC60309, 2P+E
3 : 32A, IEC60309, 2P+E
4 : 16A, IEC60309, 3P+N+E
5 : 32A, IEC60309, 3P+N+E
- A : Metered
B : Outlet metered
C : Metered and outlet switched
D : Outlet metered and outlet switched



DATWYLER

SWITZERLAND

Dätwyler IT Infra AG
Gotthardstrasse 31
6460 Altdorf
T +41 41 875-1268
F +41 41 875-1986
info.ITinfra.ch@datwyler.com
www.ITinfra.datwyler.com

GERMANY

Dätwyler IT Infra GmbH
Auf der Roos 4-12
65795 Hattersheim
T +49 6190 8880-0
F +49 6190 8880-80
info.ITinfra.de@datwyler.com
www.ITinfra.datwyler.com

Dätwyler IT Infra GmbH
Lilienthalstraße 17
85399 Hallbergmoos
T +49 811 998633-0
F +49 811 998633-30
info.ITinfra.de@datwyler.com
www.ITinfra.datwyler.com

AUSTRIA

Dätwyler IT Infra GmbH
Niederlassung Österreich
Liebermannstraße A02 403
2345 Brunn am Gebirge
T +43 1 8101641-0
F +43 1 8101641-35
info.ITinfra.at@datwyler.com
www.ITinfra.datwyler.com

ITALY

Datwyler IT Infra S.r.l.
Via dei Campi della Rienza, 30
39031 Brunico (BZ)
T +39 031 928277
info.ITinfra.it@datwyler.com
www.ITinfra.datwyler.com

CZECH REPUBLIC

Datwyler IT Infra s.r.o.
Ústecká 840/33
405 02 Děčín
T +420 417 580110
F +420 417 580139
info.ITinfra.cz@datwyler.com
www.ITinfra.datwyler.com

CHINA

Datwyler (Suzhou) IT Infra Co., Ltd.
No. 218, East Beijing Road
Taicang Economic Development Zone
Jiangsu Province, 215413
T +86 512 3306-8066
F +86 512 3306-8049
info.ITinfra.cn@datwyler.com
www.ITinfra.datwyler.cn

Datwyler (Suzhou) IT Infra Co., Ltd.
Shanghai Branch
Room 804, Shenggao International Building
No. 137, Xian Xia Road, Changning District
Shanghai, 200051
T +86 21 3253-2885
F +86 21 6813-0298
info.ITinfra.cn@datwyler.com

Datwyler (Suzhou) IT Infra Co., Ltd.
Beijing Branch
Room 16B2, West Wing, Han Wei Plaza
No. 7, Guang Hua Rd, Chaoyang District
Beijing, 100020
T +86 10 5971-4288/77/76
F +86 10 5971-4277
sales.office.bj.cn@datwyler.com

Datwyler (Suzhou) IT Infra Co., Ltd.
Guangzhou Branch
A, 7 FL, Gaosheng Building
No. 109, Tiyu Rd. W., Tianhe District
Guangzhou, 510620
T +86 20 3879-1200
F +86 20 3879-1105
sales.office.gz.cn@datwyler.com

SINGAPORE

Datwyler IT Infra Pte. Ltd.
30 Toh Guan Road #01-01A
608840 Singapore
T +65 68631166
F +65 68978885
info.ITinfra.sg@datwyler.com
www.ITinfra.datwyler.com

UNITED ARAB EMIRATES

Datwyler Middle East FZE
Jabel Ali Free Zone
LB 15, Second Floor, Room #10
P.O. Box 263480
Dubai
T +971 4 4228129
F +971 4 4228096
info.ITinfra.ae@datwyler.com
www.ITinfra.datwyler.com

Datwyler IT Infra Solutions LLC
Units 1003 - 1005, 10th Floor,
IB Tower Business Bay
Dubai
T +971 4 4228129
F +971 4 4228096
info.ITinfra.ae@datwyler.com
www.ITinfra.datwyler.com