





Description

The E4T miniature transmissive optical encoder is designed to provide digital quadrature encoder feedback for high volume, limited space applications. The E4T is designed to be a drop in replacement for the E4P that offers higher maximum speed and increased output drive. The E4T utilizes an innovative, push-on encoder disk which accepts shaft diameters of 2.0mm to .250".

The E4T miniature encoder base provides mounting holes for two #3-48, length 3/16" or two M2.5, length 4mm screws on a .586" bolt circle. The encoder cover is easily snapped onto the base and is marked with the connector pin-out.

The E4T series encoder is connected using a 4-conductor, high retention, polarized, 1.25mm pitch connector. Mating cables and connectors (see the Cables / Connectors web page) are not included, and are available separately.




Features

- ▶ Push-on hub spring loaded collet design
- ▶ Minimum shaft length of .275"
- ▶ Fits shaft diameters of .079" to .250"
- → 100 to 500 cycles per revolution (CPR)
- ▶ 400 to 2,000 pulses per revolution (PPR)
- ▶ Single +5V supply






E4T Differential

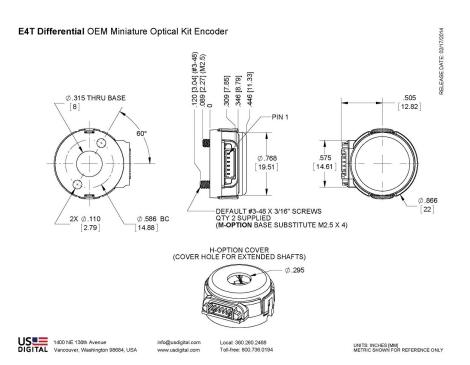

E4T Single Ended

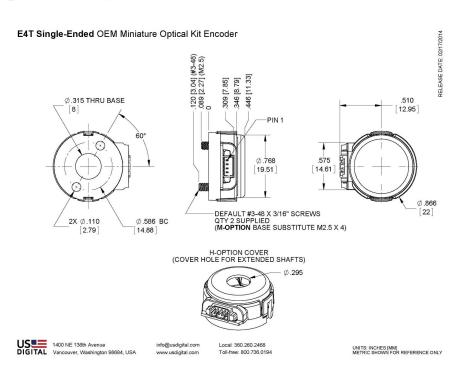









Parameter	Value	Units	
Operating Temperature	-20 to 100	С	
Electrostatic Discharge, IEC 61000-4-2 Single-ended (-S version) Differential (-D version)	± 12 ± 7	kV	
Shock, 6 millisecond, half-sine	75	G	
Vibration (20Hz to 2kHz, sinusoidal)	20	G	

Mechanical

Parameter	Value	Units
Max. Shaft Axial Play	± .010	in.
Max. Shaft Runout (TIR)	.002	in.
Max. Acceleration	250,000	rad/sec²
Maximum RPM (1) e.x. CPR = 300, max. rpm = 20000 e.x. CPR = 200, max. rpm = 30000	minimum value of (6000000/CPR) and (60000)	RPM
Max. Codewheel Moment of Inertia	5.1 x 10^-7	oz-in-s²
Mounting Screw Size Default (D-option base) Metric (M-option base)	#3-48 x 3/16" M2.5, length 4mm	
Screw Bolt Circle Diameter	.586 ±.005	in.
Minimum Shaft Length (2)	.275	in.
Maximum Shaft Length (2)	.395 (D option) / no limit (H option)	in.
Mounting Screw Torque	2-3	in-lbs
Technical Bulletin TB1001 - Shaft and Bore Tole	rances	Download

^{(1) 60000} RPM is the maximum rpm due to mechanical considerations. The maximum RPM due to the module's 100kHz maximum output frequency is (600000/CPR).

Single-ended Electrical

Specifications	Min.	Tun	Max.	Units	Notes
Specifications	IVIIII.	Тур.	IVIAX.	Ullits	Notes



⁽²⁾ Including axial play.






Supply Voltage	4.5	5.0	5.5	V	
Supply Current		25	30	mA	no load
Low-level Output			0.4	V	IOL = 8 mA
		0.035		V	no load
High-level Output	2.4			V	IOH = -8 mA
		4.0		V	no load
Output Rise Time		100		ns	no load
Output Fall Time		50		ns	no load

Differential Electrical

Specifications	Min.	Тур.	Max.	Units	Notes
Supply Voltage	4.5	5.0	5.5	V	
Supply Current		27	32	mA	no load
Single-Ended Output Voltage High	4.75	5.0		V	Min. @ 25mA load, Typ. @ no load
Single-Ended Output Voltage Low		0.25	0.60	V	Typ. @ no load, Max. @ 4.5mA load
Differential Output Voltage	3.0	3.8		V	RL = 100 ohm
Differential Output Rise/Fall Time			20	ns	

Phase Relationship

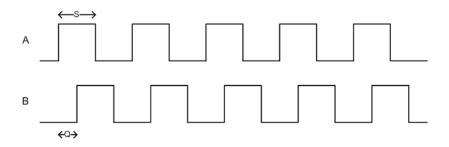

Parameter	Min.	Тур.	Max.	Units
Symmetry, S	105	180	255	electrical degrees
Quadrature Delay, Q	30	90	150	electrical degrees

- (1) A leads B for clockwise shaft rotation, B leads A for counter clockwise shaft rotation viewed from the cover side of the encoder.
- (2) Typical values represent the encoder performance at typical mounting alignment, whereas the maximum values represent the encoder performance across the range of recommended mounting tolerance.





1400 NE 136th Avenue Vancouver, Washington 98684, USA info@usdigital.com www.usdigital.com Local: 360.260.2468 Toll-free: 800.736.0194





4-pin Single-ended (1)

6-pin Differential (2)

Pin	Description	Pin	Description
1	+5VDC power	1	Ground
2	A channel	2	A channel
3	Ground	3	A- channel
4	B channel	4	+5VDC power
		5	B channel
		6	B- channel

- (1) 4-pin single-ended mating connector is CON-MIC4
- (2) 6-pin differential mating connector is CON-MIC6



H-option (Hole In Cover)

The **H**-option adds a 0.295" diameter hole in the cover for the shaft to pass through.

M-option (Metric Mounting Screws)

Provides alternate metric M2.5, length 4mm screws. When M-option is NOT specified the default is #3-48 x 3/16" screws.

Accessories

1. Centering Tool*

Part #: MCTOOL - (Shaft Diameter)

Description: This reusable tool is used to accurately center the E4T base on the shaft.

2. Spacer Tool*

Part #: SPACER-E4T

Description: This reusable tool is used to properly space the codewheel from the encoder.

Assembly Instructions

E4T Assembly Instructions - http://usdigital.com/assets/assembly/E4T%20Assembly%20Instructions.pdf



^{*}Both the MCTOOL and SPACER-E4T tools are included with all packaging options.





CPR	Bore	Output	Cover	Base	Packaging
100	079 =2 <i>mm</i>	S =Single	D =Default	D =Default	B = Encoder components packaged in bulk.
108	098 =	Ended	H =Hole in	M =Alternate metric	One spacer and one centering tool per 100
120 =	2.5mm	D =Differential	Cover	M2.5, length 4mm	encoders.
125 =	118 = <i>3mm</i>			screws	1 =Each encoder packaged individually.
128 =	125 = 1/8"				One spacer tool and one centering tool per
200 =	157 =4mm				100 encoders.
250 =	188 = 3/16"				2 = Each encoder packaged individually.
256 =	197 =5mm				One spacer and one centering tool per encoder.
300 =	236 =6mm				onodor.
360 =	250 = 1/4"				
400 =					
500 =					

Notes

- Cables and connectors are not included and must be ordered separately.
- ▶ US Digital® warrants its products against defects in materials and workmanship for two years. See completewarranty for details.



Local: 360.260.2468 Toll-free: 800.736.0194