

Best Fluid Technology


HIGH PRESSURE PUMPS FOR CHEMICAL APPLICATION



PEROXIDE DOSING PUMPS FOR LDPE PLANTS (350 MPa).

STAND-BY INTENSIFIERS

offer redundancy and improve the availability of the dosing pump. Switch-over can be effected directly at the pump or remotely controlled via the central control unit (DCS).

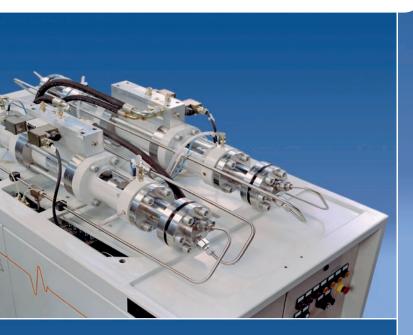





PEROXIDE DOSING PUMPS

with intensifier in "single" and "stand-by" design, pressure range up to 350 MPa, flow rates up to 150 l/h, as well as high pressure tubing systems and injection nozzles for use in LDPE (Low Density Polyethylene) reactors.



PRESSURE TESTING PUMPS AND SYSTEMS (550 MPa).



PRESSURE TEST PUMPS

mobile type for construction site use and as stationary plants for valve testing units, flow rates up to 1 l/min at a max. operating pressure of 550 MPa.

AUTOFRETTAGE SYSTEMS (1,200 MPa).

STATIONARY VALVE TESTING STATION

and complete pressure testing units for a max. operating pressure of up to 550 MPa.



TOOLS AND COMPLETE SEALING SYSTEMS for pressure testing and autofrettage at operating pressures of up to 1,200 MPa.





ULTRA HIGH PRESSURE PUMPS

and components for autofrettage and pressure testing units with operating pressures of up to 1,200 MPa with a flow rate of up to 0.5 l/min.

OTHER BROCHURES











CERTIFICATES



AD 2000-Merkblatt HP 0 / HP 100 R and EN ISO 3834-2

according to PED 97/23/EC



PED 97/23/EC

TŪ✓ EN ISO 9001 20 100 151416295 EN ISO 14001 20 104 151416294 AUSTRIA ZERTIFIZIERT



BFT GmbH Industriepark 24 8682 Hoenigsberg, Austria Phone: +43-3862-303-303 Fax: +43-3862-303-304 Email: info@bft-pumps.com

Internet: www.bft-pumps.com

BFT GMBH IS MEMBER OF:

