

Technical Specifications

Tour-e vehicle specification sheet and variants

Design targets for the 2028 launch vehicle

45 kWh

usable LFP
(48 kWh gross)

~300 km

real-world range,
AC on

≤30 min

10-80% at
100-120 kW DC

**5+2 ·
~400 L**


seats · boot in
5-seat mode

**5★
target**

Bharat NCAP

TOUR-E · SIDE PACKAGE

Compact electric MPV · 5+2 seats · HEARTECT-e derived · design targets

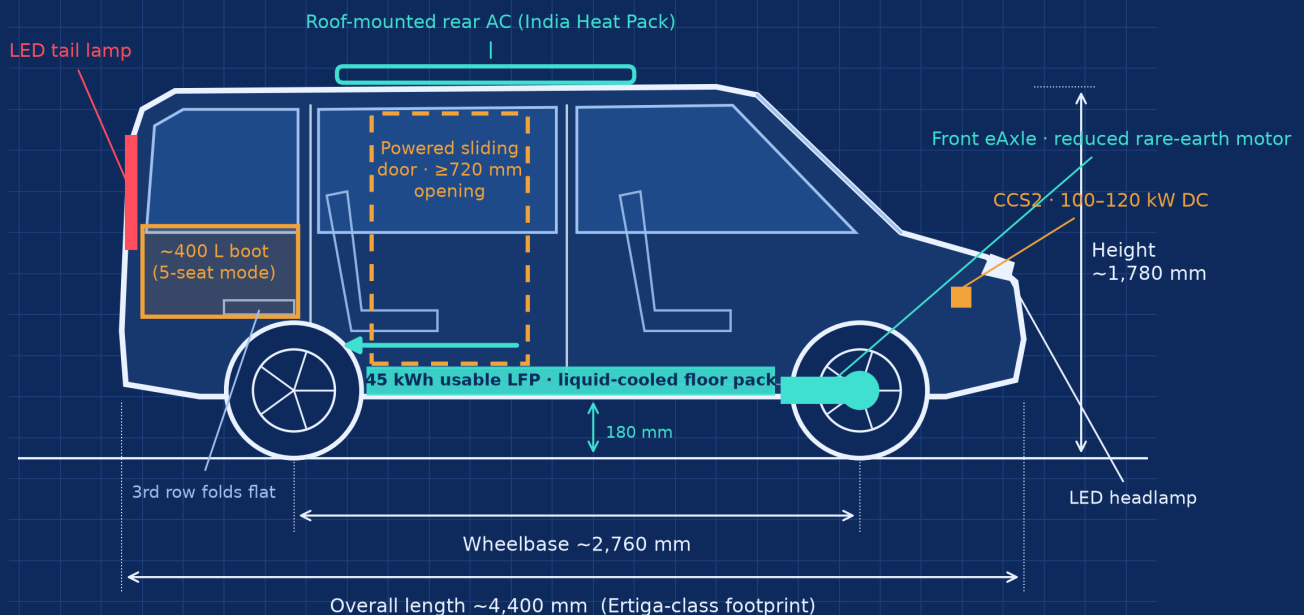

Side package, design targets. The kerb-side powered sliding door opens rearwards; the battery sits under a flat floor between the axles.

1 · Body and package

Parameter	Tour-e (standard)	Notes
Body type	Compact electric MPV	HEARTECT-e derived skateboard; Ertiga-class footprint
Length / width / height	~4,400 / ~1,760 / ~1,780 mm	Tall roof for headroom above the floor pack and the rear-AC pod
Wheelbase	~2,760 mm	Battery between the axles; short overhangs
Ground clearance	180 mm (unladen)	Indian speed breakers and flooded roads
Seating	5+2 (fold-flat 3rd row)	5-seat default; 7-seat for pooled and corporate trips
Doors	Kerb-side powered sliding door, ≥720 mm opening	JPN Taxi benchmark: 720 × 1,300 mm; conventional hinged doors elsewhere
Boot	~400 L (5-seat) · ~150 L (7-seat)	2 large + 2 cabin cases with the 3rd row folded
Kerb weight (target)	~1,650 kg	LFP pack ~300 kg

2 · Battery, powertrain and charging

Parameter	Tour-e (standard)	Notes
Battery	45 kWh usable / 48 kWh gross LFP	Cobalt- and nickel-free; high thermal stability
Battery thermal	Liquid-cooled floor pack	Plugged-in pre-cooling; BMS limits charge rate in extreme heat
Energy use	150 Wh/km real-world, AC on	45 kWh ÷ 150 Wh/km = 300 km
Range	~300 km real-world	Covers a 200–250 km duty day on one overnight charge
DC fast charging	CCS2, 100–120 kW peak	10–80% (31.5 kWh) in ≤30 min
AC charging	11 kW on-board charger	0–100% in ~4.5 h overnight at the depot
Motor	Front eAxe, ~100 kW, reduced rare-earth	Lower NdFeB content cuts import dependence
Top speed	Limited per transport-vehicle rules	Speed-limiting function in software
Battery design life	4 lakh km / 5 years*	≥70% SoH at end of life (~210 km range); *backed by BaaS

3 · Safety

Parameter	Tour-e (standard)	Notes
Crash rating	5★ Bharat NCAP (target)	The HEARTECT-e based e VITARA is rated 5★
Airbags	6 (front, side, curtain)	
Active safety	ESP, ABS/EBD, hill-hold	
ADAS	Level 2: AEB, lane keep, adaptive cruise, blind-spot	Camera + radar
Driver monitoring	DMS camera (drowsiness, distraction)	Alerts to driver and fleet operator
Passenger safety	SOS / panic button, live tracking	Vehicle tracking and emergency button as required for public service vehicles (AIS-140)
High-voltage safety	Crash-sensing HV disconnect; IP67 pack	Pack protected by the floor structure

4 · Comfort, interior and durability

Parameter	Tour-e (standard)	Notes
India Heat Pack	Liquid-cooled pack · pre-cooling · roof-mounted rear AC	Rear passengers get their own AC outlets
Interior	Washable, taxi-grade trim; USB-C in every row	Grab handles; flat floor
Driver cockpit	Single screen for navigation, aggregator app and meter	Reduces phone handling
Durability	Commercial-duty validation	Heavy-duty suspension, bushes and brakes for 60–80k km/yr
Connectivity	4G/5G telematics, OTA updates	Feeds Maruti FleetOS (see 05_FleetOS_Architecture)
Sustainability	Zero tailpipe emissions	End-of-life packs to second-life storage and recycling

5 · Variants

Variant	Battery / range	Seats	Mission	Timing
Tour-e	45 kWh · ~300 km	5+2	City, commute, airport	Launch 2028
Tour-e Long	~60 kWh · ~400 km	5+2	Inter-city corridors	2031–35
Tour-e WAV	45 kWh · ~300 km	4 + wheelchair	Accessible and premium trips	2031–35
7-seat retail twin	45 kWh · ~300 km	7	Private family buyers (adds volume)	With launch



Tour-e
45 kWh LFP · ~300 km
5+2 seats · city, commute, airport



Tour-e Long
~60 kWh · ~400 km
inter-city corridors




Tour-e WAV
rear ramp · wheelchair bay
accessible & premium trims




7-seat retail twin
family MPV on same line
adds volume, cuts unit cost


A · CITY 5-SEAT (default)

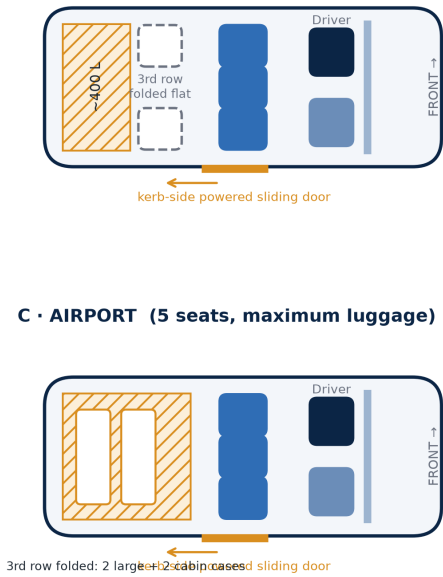


B · SHUTTLE 7-SEAT (pooled / corporate)

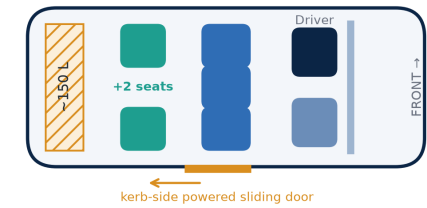

C · AIRPORT (5 seats, maximum luggage)

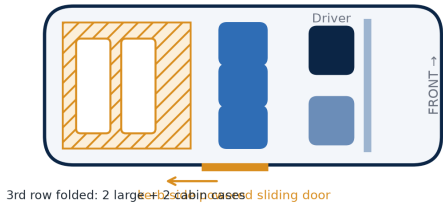

D · WAV (wheelchair-accessible variant)

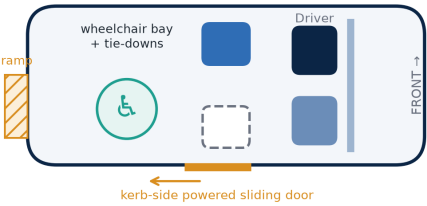

Plan view, front of vehicle to the right; right-hand drive, kerb side (left) at the bottom. Design targets; not to exact scale.

Seating configurations on one body: city 5-seat, shuttle 7-seat, airport and wheelchair-accessible.

6 · Price and battery options (team model, 2026 ₹)

	2028 launch	2035 at scale
Ex-factory cost	₹10.5 L	₹9.0 L
Ex-showroom, bought outright	₹12.4 L	₹10.6 L
Fleet BaaS: vehicle price	₹7.9 L	₹6.9 L
Fleet BaaS: battery rate	₹2.0/km	₹1.6/km

All Tour-e specifications are design targets. Cost and price build-up: 02_TCO_Model.xlsx, Cost_Price sheet.