尖头塔式起重机

Topkit Tower Crane

Q5510-6T

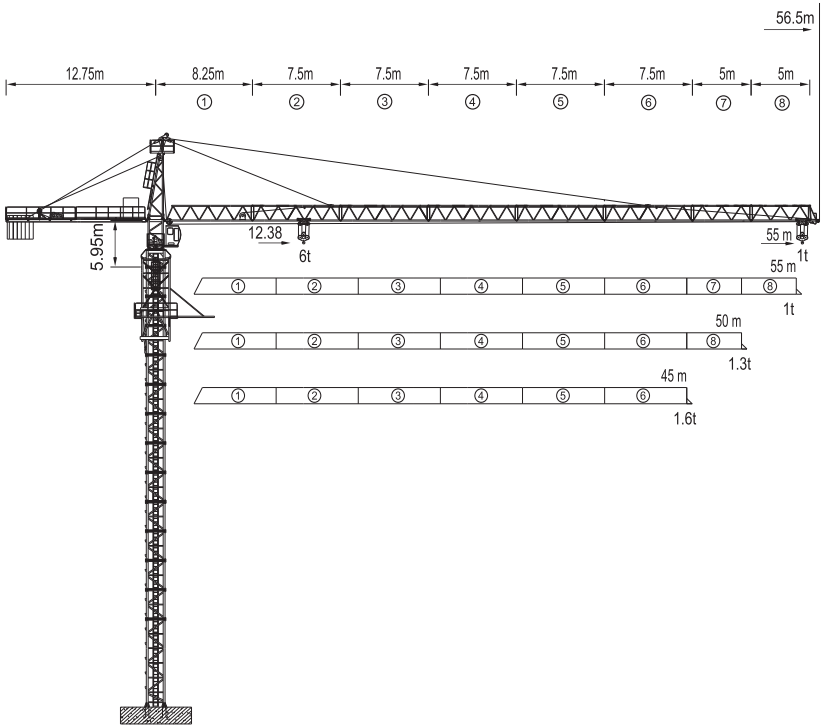

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts (1.6x1.6x2.5m)

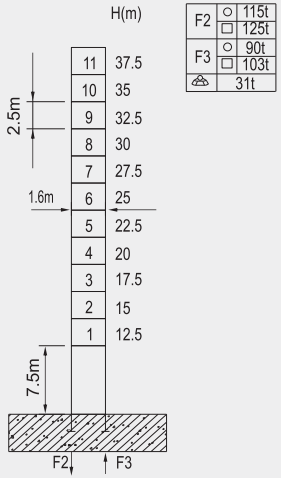

F2	○	115t
	□	125t
F3	○	90t
	□	103t
		31t

○ 工作状态	○ In service
□ 非工作状态	□ Out of service
空载、无配重	Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

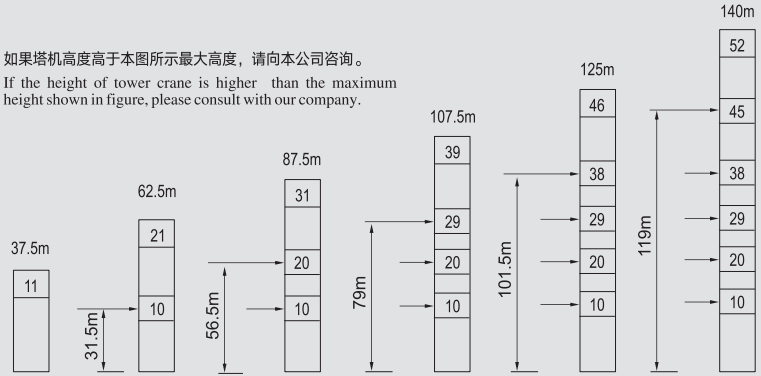

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2–12.38	14	16	18	20	22	23.12	25	28	30	32	35
55m	IV	起重量 Load(t)	6	5.25	4.54	4	3.54	3.18	3	2.74	2.4	2.21	2.04	1.83
	II		3							2.74	2.4	2.21	2.04	1.83
起重臂 Jib	倍率Fall	起重幅度 Range(m)	38	40	42	45	48	50	52	55				
55m	IV	起重量 Load(t)	1.65	1.54	1.45	1.32	1.21	1.14	1.01	1				
	II		1.65	1.54	1.45	1.32	1.21	1.14	1.01	1				

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2–13.62	15	18	20	22	25	25.43	28	30	32	35
50m	IV	起重量 Load(t)	6	5.41	4.43	3.94	3.54	3.06	3	2.68	2.47	2.29	2.05
	II		3							2.68	2.47	2.29	2.05
起重臂 Jib	倍率Fall	起重幅度 Range(m)	35.88	38	40	42	44	45	46	48	50		
50m	IV	起重量 Load(t)	2	1.86	1.75	1.64	1.54	1.5	1.46	1.37	1.3		
	II		2	1.86	1.75	1.64	1.54	1.5	1.46	1.37	1.3		

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2–14.35	16	18	20	22	25	26.8	28	30	32
45m	IV	起重量 Load(t)	6	5.34	4.69	4.18	3.75	3.25	3	2.85	2.63	2.44
	II		3							2.85	2.63	2.44
起重臂 Jib	倍率Fall	起重幅度 Range(m)	35	38	40	42	45					
45m	IV	起重量 Load(t)	2.19	1.98	1.86	1.75	1.6					
	II		2.19	1.98	1.86	1.75	1.6					

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight		
		CA	CB	合计/Tatal kg
		2200kg	1300kg	
55	12.75	6	1	14500
50	12.75	6		13200
45	12.75	5	1	12300



机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	单绳 m/min	单绳 t	双绳 m/min	双绳 t	绳速 m	功率/Power
起升 Hoisting	QTJ63	4.25	6	8.5	3	400 >400*	24kw
		20	6	40	3		
		40	3	80	1.5		
	33LVF15	m/min	t	m/min	t	400>400* 变频调速 Ferquency control	22kw
		20	6	40	3		
		40	3	80	1.5		
变幅 Trolleying	QTB4.0-H	44/22m/min					2.4kw
	DVF95	0-60m/min		变频调速 Ferquency control			4.5kw
回转 Slewing	QTH100	0-0.7r/min					2x3.7kw
	RVF95			变频调速 Ferquency control			2x4.5kw
行走 Traveling	14TVF	0-25m/min		变频调速 Ferquency control			2x5.2kw
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power							52KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		11.85	2.283	1.158	1719	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
2	起升机构 Hoist Mechanism		1.535	1.869	0.8	1400	1
3	塔头 Towerhead		1.302	1.226	7.236	1192.54	1
4	司机室 Cabin		1.65	1.07	2.03	330	1
5	回转支承 Slewing Table		3.792	3.622	3.328	2340.06	1
6	根部节 Jib-Section1		7.5	1.324	1.351	790.31	1
7	起重臂第二节 Jib-Section2		7.5	1.324	1.351	686.44	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
8	起重臂第三节 Jib-Section3		7.5	1.324	1.198	610.99	1
9	起重臂第四节 Jib-Section4		7.5	1.324	1.198	610.99	1
10	起重臂第五节 Jib-Section5		7.5	1.324	1.198	610.99	1
11	起重臂第六节 Jib-Section6		7.5	1.324	1.198	626.91	1
12	起重臂第七节 Jib-Section7		5.0	1.338	1.34	312.38	1
13	起重臂第七节 Jib-Section8		5.0	1.338	1.34	312.38	1
14	起重臂端部节 Jib Nose		0.709	1.324	1.525	81.26	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
15	小车 Trolley		1.27	1.322	0.658	261.007	1
16	吊钩 Hook		0.94	0.178	0.878	141.84	1
17	套架 Telescoping Cage		3.5	3.5	7.026	2916.39	1
18	基础节 Basic Mast		7.5	1.6	1.88	2870.96	1
19	标准节 Mast		1.6	1.6	2.5	794.05	11

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
20	附着框 Anchorage Frame		2.268	1.948	0.315	430	n
21	驾驶室 Cabin Mast		1.312	1.312	2.112	914.5	1