尖头塔式起重机

Topkit Tower Crane

Q6013B-6T

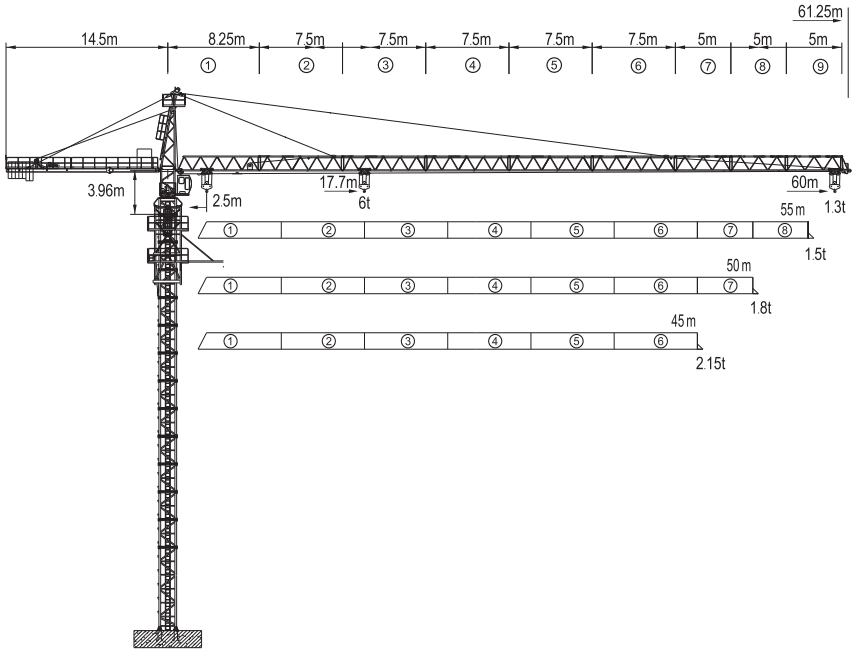

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts (1.6x1.6x2.5m)

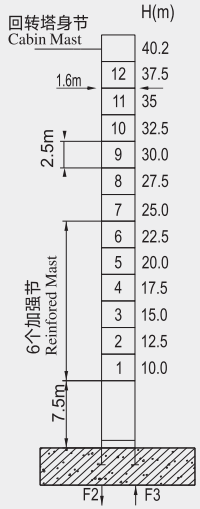

F2	○	114t
	□	115t
F3	○	84.1t
	□	101t
		36t

○ 工作状态	○ In service
□ 非工作状态	□ Out of service
自重	Without load and ballast with longest jib and maximum height

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

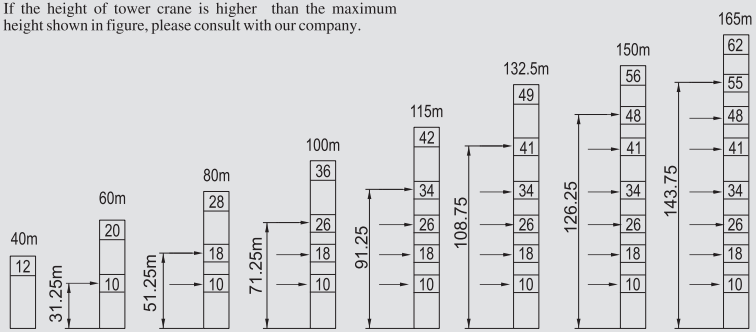

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.5~17.7	20	25	30	32	35	38	40	42	45	48	50	52	55	60
60m	IV	起重量 Load(t)	6	5.19	3.97	3.16	2.9	2.6	2.33	2.17	2.03	1.85	1.68	1.59	1.5	1.38	1.2
	II		3					2.7	2.43	2.27	2.13	1.95	1.78	1.69	1.6	1.48	1.3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.5~17.9	20	25	30	32.5	35	38	40	42	45	48	50	52	55
55m	IV	起重量 Load(t)	6	5.26	4	3.2	2.9	2.63	2.36	2.2	2.06	1.9	1.7	1.6	1.52	1.4
	II		3					2.73	2.46	2.3	2.16	2.0	1.8	1.7	1.62	1.5

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.5~18.2	20	25	30	32.8	33.6	35	38	40	42	45	48	50
50m	IV	起重量 Load(t)	6	5.48	4.19	3.35	3.0	2.9	2.76	2.48	2.3	2.17	1.97	1.8	1.7
	II		3						2.86	2.58	2.4	2.27	2.07	1.9	1.8

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.5~18.5	20	25	28	30	33.9	34.78	35	38	40	42	45
45m	IV	起重量 Load(t)	6	5.6	4.29	3.75	3.45	3	2.9	2.86	2.58	2.43	2.29	2.05
	II		3							2.96	2.68	2.53	2.39	2.15

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight			
		CA	CB	CC	合计/Tatal(kg)
		2200kg	1600kg	1300kg	
60	14.5	6	1	1	16100
55	14.5	6	1		14800
50	14.5	5	1	1	13900
45	14.5	5	1		12600



机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m	功率/Power
起升 Hoisting	QTJ63	4.25	6	8.5	3	400 >400*	24kw
		20	6	40	3		
		40	3	80	1.5		
	33LVF15	20	6	40	3	400 >400* 变频调速 Ferquency control	22kw
		40	3	80	1.5		
变幅 Trolleying	QTB4.0-H	44/22m/min					2.4kw
	DVF95	0-60m/min		变频调速 Ferquency control			4.5kw
回转 Slewing	QTH100	0-0.7r/min					2x3.7kw
	RVF95			变频调速 Ferquency control			2x4.5kw
行走 Traveling	14TVF	0-25m/min		变频调速 Ferquency control			2x5.2kw
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power							52KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		13.93	2.29	1.54	2538	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
2	起升机构 Hoist Mechanism		1.54	1.51	0.8	1171	1
3	塔头 Towerhead		7.33	2.65	1.67	1666	1
4	司机室 Cabin		1.65	1.07	2.03	330	1
5	回转支承 Slewing Table		3.79	3.62	3.24	3900	1
6	根部节 Jib Section1		7.63	1.36	1.43	952	1
7	起重臂第二节 Jib Section2		7.63	1.32	1.26	795	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
8	起重臂第三节 Jib-Section3		7.63	1.32	1.22	678	1
9	起重臂第四节 Jib-Section4		7.63	1.32	1.22	674	1
10	起重臂第五节 Jib-Section5		7.63	1.32	1.22	674	1
11	起重臂第六节 Jib-Section6		7.63	1.32	1.22	698	1
12	起重臂第七节 Jib-Section7		5.13	1.32	1.22	362	1
13	起重臂第八节 Jib-Section8		5.13	1.32	1.22	343	1
14	起重臂第九节 Jib-Section9		5.13	1.32	1.22	293	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
15	起重臂端部节 Jib Nose		0.74	1.32	1.22	104	1
16	小车 Trolley		1.35	1.38	0.55	246	1
17	吊钩 Hook		1.09	1.17	0.25	166	1
18	套架 Telescoping Cage		7.02	3.71	3.71	3037	1
19	基础节 Basic Mast		7.5	1.95	1.95	3311	1
20	加强节 Reinforced Mast		2.5	1.74	1.74	986	6

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
21	标准节 Mast		2.5	1.74	1.74	857	6
22	附着框 Anchorage Frame		2.268	1.948	0.315	430	n