尖头塔式起重机

Topkit Tower Crane

# Q6024-12T




本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.



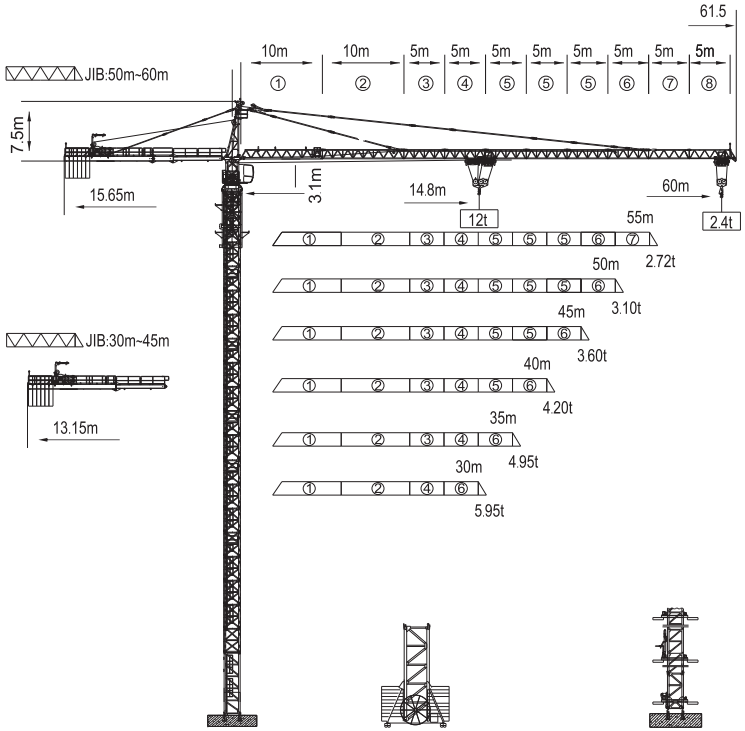

## 塔身截面 | Masts L48A1(1.6x1.6x3m)




| | |
|---|---|
| ○ 工作状态 | ○ In service |
| □ 非工作状态 | □ Out of service |
| 空载、无配重 | Without load and ballast |

## 附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

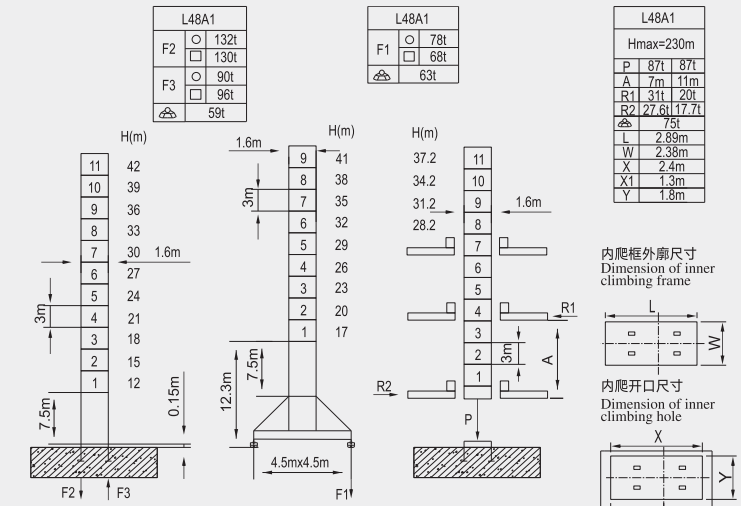

## 塔身截面 | Masts L68B1/B2(2x2x3m)




## 附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

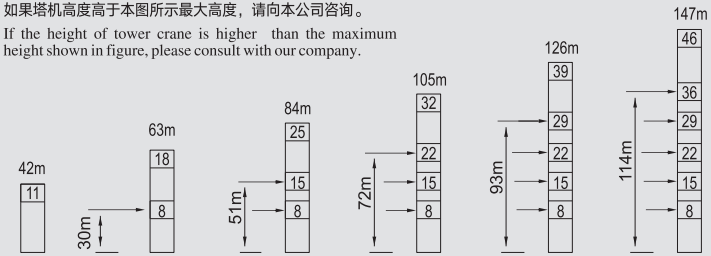


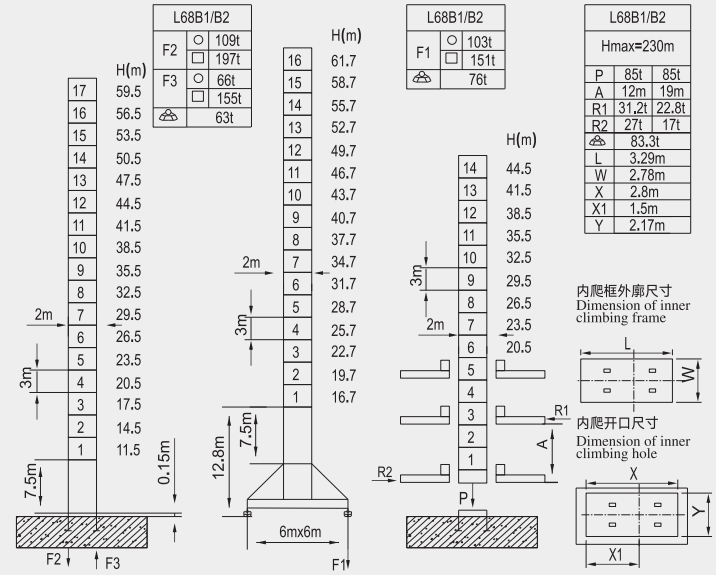



## 载荷表 | Load Diagrams

| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–14.8 | 15 | 17 | 20 | 25 | 26.04 | 28.46 | 30 | 35 | 40 | 45 | 47 | 50 | 52 | 55 | 57 | 60 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 60m | IV | 起重量 Load(t) | 12 | 11.81 | 10.16 | 8.34 | 6.32 | 6 | 5.35 | 4.99 | 4.06 | 3.36 | 2.82 | 2.64 | 2.39 | 2.24 | 2.04 | 1.92 | 1.75 |
| | II | | 6 | | | | | | | 5.64 | 4.71 | 4.01 | 3.47 | 3.29 | 3.04 | 2.89 | 2.69 | 2.57 | 2.4 |
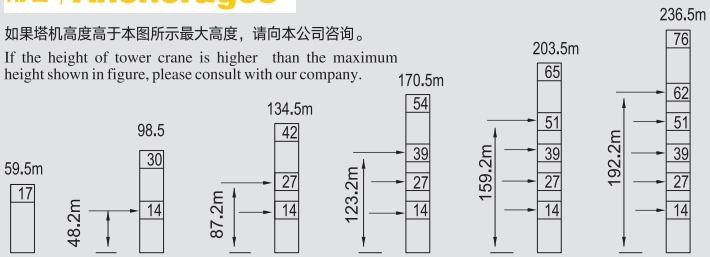
| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–14.92 | 17 | 18 | 20 | 22 | 26.26 | 28.7 | 30 | 35 | 40 | 45 | 47 | 50 | 52 | 55 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 55m | IV | 起重量 Load(t) | 12 | 10.26 | 9.58 | 8.43 | 7.49 | 6 | 5.35 | 5.05 | 4.1 | 3.4 | 2.86 | 2.67 | 2.42 | 2.27 | 2.07 |
| | II | | 6 | | | | | | | 5.7 | 4.75 | 4.05 | 3.51 | 3.32 | 3.07 | 2.92 | 2.72 |

| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–15.02 | 17 | 20 | 22 | 26.44 | 28.9 | 30 | 35 | 40 | 45 | 47 | 50 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 50m | IV | 起重量 Load(t) | 12 | 10.35 | 8.5 | 7.56 | 6 | 5.35 | 5.09 | 4.14 | 3.43 | 2.89 | 2.7 | 2.45 |
| | II | | 6 | | | | | | 5.74 | 4.79 | 4.08 | 3.54 | 3.35 | 3.1 |

| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–15.23 | 17 | 20 | 22 | 26.82 | 29.31 | 30 | 35 | 40 | 45 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 45m | IV | 起重量 Load(t) | 12 | 10.52 | 8.65 | 7.69 | 6 | 5.35 | 5.19 | 4.22 | 3.51 | 2.95 |
| | II | | 6 | | | | | | 5.84 | 4.87 | 4.16 | 3.6 |

| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–15.36 | 17 | 20 | 22 | 27.05 | 29.57 | 32 | 35 | 40 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 40m | IV | 起重量 Load(t) | 12 | 10.63 | 8.74 | 7.77 | 6 | 5.35 | 4.82 | 4.28 | 3.55 |
| | II | | 6 | | | | | | 5.47 | 4.93 | 4.2 |

| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–15.42 | 17 | 20 | 25 | 27.17 | 29.7 | 30 | 35 |
|---|---|---|---|---|---|---|---|---|---|---|
| 35m | IV | 起重量 Load(t) | 12 | 10.68 | 8.78 | 6.67 | 6 | 5.35 | 5.28 | 4.3 |
| | II | | 6 | | | | | | 5.93 | 4.95 |

| 起重臂 Jib | 倍率Fall | 起重幅度 Range(m) | 3.5–15.46 | 17 | 20 | 25 | 27.25 | 29.78 | 30 |
|---|---|---|---|---|---|---|---|---|---|
| 30m | IV | 起重量 Load(t) | 12 | 10.72 | 8.81 | 6.69 | 6 | 5.35 | 5.3 |
| | II | | 6 | | | | | | 5.95 |

## 平衡重配置 | Counter-jib Ballast

| 长度/Length(m) | | 平衡重/Counter-weight | | | |
|---|---|---|---|---|---|
| | | CA 3400kg | CB 4200kg | CC 4800kg | 合计/Tatal(kg) |
| 60 | 15.65 | | 2 | 2 | 18000 |
| 55 | 15.65 | 2 | 1 | 1 | 15800 |
| 50 | 15.65 | 3 | 1 | | 14400 |
| 45 | 13.15 | 1 | 2 | 1 | 16600 |
| 40 | 13.15 | 3 | 1 | | 14400 |
| 35 | 13.15 | 1 | | 2 | 13000 |
| 30 | 13.15 | 2 | | 1 | 11600 |




## 机构配置 | Specifications(Mechanisms)

| 机构名称 Item | 机构代号 Mechanism | | | | | | 功率/Power Kw |
|---|---|---|---|---|---|---|---|
| | | m/min | t | m/min | t | m | |
| 起升 Hoisting | 70RCS30 | 0-20 | 12 | 0-40 | 6 | 500 >500* | 51.5kw |
| | | 0-40 | 6 | 0-80 | 3 | | |
| | 75LVF30 | 0-22.5 | 12 | 0-45 | 6 | 500 >500* 变频调速 Ferquency control | 55kw |
| | | 0-45 | 6 | 0-90 | 3 | | |
| 变幅 Trolleying | X120K | 15-30-60m/min | | | | | 6kw |
| | DVF120 | 0-60m/min | | 变频调速 Ferquency control | | | 6kw |
| 回转 Slewing | RCV120 | 0.0.7r/min | | | | | 2x6kw |
| | RVF120 | 0.0.7r/min | | 变频调速 Ferquency control | | | 2x6kw |
| 行走 Traveling | 18TVF | 0.25m/min | | 变频调速 Ferquency control | | | 4x3.4kw |
| 电网 Mains supply | | CE138 ICE38 | | | | | 380V(±5%)/50Hz 440V(±5%)/60Hz |
| 电力容量 Necessary electric power | | | | | | | 100KVA |

## 部件尺寸及重量 | Dimension & weight

| 序号 No. | 名称 Name | 产品描述 Description | 长 L(m) | 宽 W(m) | 高 H(m) | 单件重量 Weight(Kg) | 数量 Qty |
|---|---|---|---|---|---|---|---|
| 1 | 平衡臂端部节 Counter-jib2 |  | 12.25 | 3.65 | 2.15 | 4338 | 1 |
| 2 | 平衡臂根部节 Counter-jib1 |  | 3.10 | 1.53 | 1.69 | 599 | 1 |
| 3 | 起升机构 Hoist Mechanism |  | 1.85 | 1.84 | 1.23 | 1800 | 1 |
| 4 | 司机室 Cabin |  | 3.4 | 1.5 | 2.3 | 860 | 1 |
| 5 | 根部节 Jib Section1 |  | 10.2 | 1.38 | 1.78 | 1641 | 1 |
| 6 | 起重臂第二节 Jib Section2 |  | 10.23 | 1.38 | 1.27 | 1277 | 1 |

| 序号 No. | 名称 Name | 产品描述 Description | 长 L(m) | 宽 W(m) | 高 H(m) | 单件重量 Weight(Kg) | 数量 Qty |
|---|---|---|---|---|---|---|---|
| 7 | 起重臂第三节 Jib-Section3 |  | 5.23 | 1.38 | 1.26 | 546 | 1 |
| 8 | 起重臂第四、五、六、七节 Jib Section 5,6,7,8 |  | 5.23 | 1.38 | 1.25 | 478 | 4 |
| 9 | 起重臂第八节 Jib-Section8 |  | 5.19 | 1.38 | 1.2 | 469 | 1 |
| 10 | 起重臂第九节 Jib-Section9 |  | 5.14 | 1.38 | 1.2 | 380 | 2 |
| 11 | 起重臂第十节 Jib-Section10 |  | 5.14 | 1.38 | 1.2 | 303 | 1 |
| 12 | 塔头 Towerhead |  | 9.79 | 1.47 | 3.45 | 3668 | 1 |
| 13 | 回转支承 Slewing Table |  | 3.6 | 2.6 | 2.86 | 4034 | 1 |

| 序号 No. | 名称 Name | 产品描述 Description | 长 L(m) | 宽 W(m) | 高 H(m) | 单件重量 Weight(Kg) | 数量 Qty |
|---|---|---|---|---|---|---|---|
| 14 | 前小车 Front Trolley |  | 1.76 | 1.59 | 0.94 | 277 | 1 |
| 15 | 后小车 Rear Trolley |  | 1.72 | 1.66 | 1.01 | 287 | 1 |
| 16 | 吊钩 Hook |  | 1.44 | 0.24 | 1.7 | 325 | 1 |
| 17 | 套架 Telescoping Cage |  | L48A1/1.6m<br>L68B1/2m<br>L68B2/2m | 3.98<br>4.38<br>4.38 | 3.89<br>4.09<br>4.09 | 7.28<br>7.28<br>7.28 | 4744<br>5358<br>5358 | 1 |
| 18 | 普通型基础节 Ordinary Basic Mast |  | L48A1/1.6m<br>L68B1/2m<br>L68B2/2m | 7.76<br>7.76<br>7.76 | 1.73<br>2.13<br>2.13 | 1.71<br>2.11<br>2.11 | 3658<br>4355<br>4355 | 1 |