尖头塔式起重机

Topkit Tower Crane

Q7032-12T

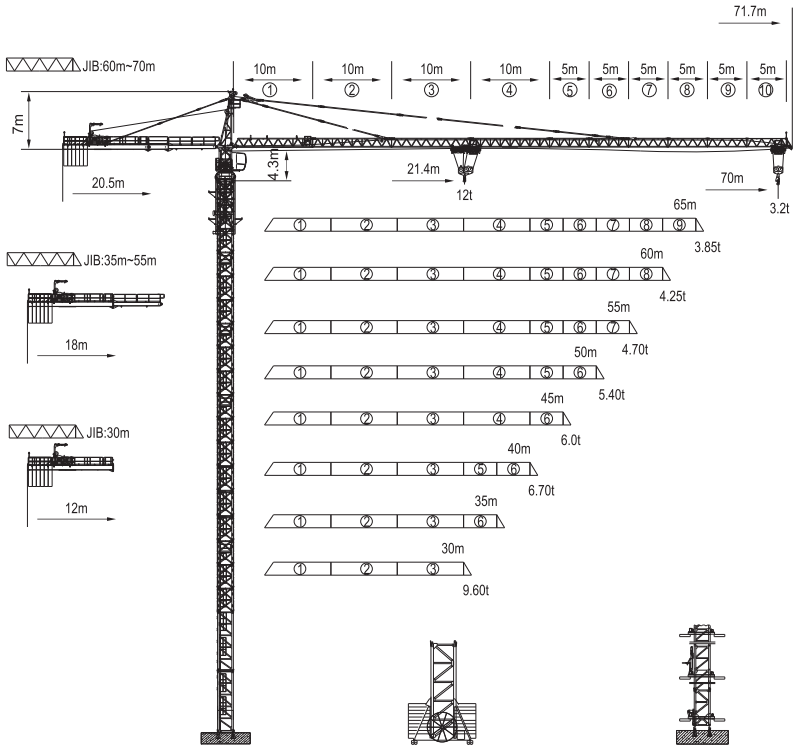

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L68B1/B2 (2x2x3m)

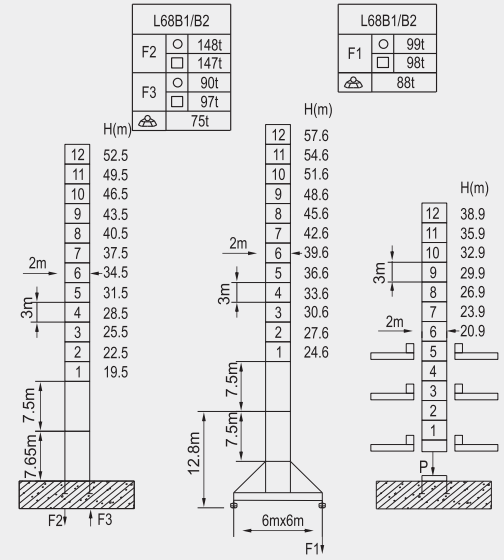

L68B1/B2		
Hmax=230m		
P	85t	85t
A	9m	12m
R1	22.8t	22.8t
R2	27t	17t
	83.3t	
L	3.29m	
W	2.78m	
X	2.8m	
X1	1.5m	
Y	2.17m	

内爬框外廓尺寸
Dimension of inner climbing frame



内爬开口尺寸
Dimension of inner climbing hole



○ 工作状态 ○ In service

□ 非工作状态 □ Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

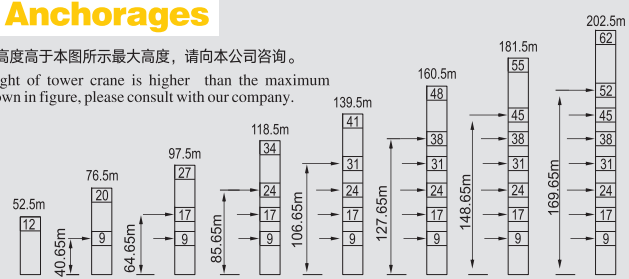

载荷表 | Load Diagrams

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~21.4	22	25	27	30	32	35	37	37.4	41.9	45	47	50	52
70m	IV	起重量 Load(t)	12	11.6	10	9.1	8.0	7.3	6.5	6.1	6	5.25	4.75	4.45	4.15	3.85
	II		6										5.5	5.2	4.9	4.6

起重臂Jib	倍率Fall	起重幅度 Range(m)	55	57	60	62	65	67	70
70m	IV	起重量 Load(t)	3.55	3.45	3.15	2.95	2.75	2.65	2.45
	II		4.3	4.2	3.9	3.7	3.5	3.4	3.2

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~22.8	25	27	30	32	35	37	39	40.4	44.7	47	50
65m	IV	起重量 Load(t)	12	10.8	9.8	8.7	8.0	7.2	6.7	6.3	6	5.25	4.95	4.55
	II		6										5.7	5.3

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55	57	60	62	65
65m	IV	起重量 Load(t)	4.25	3.95	3.75	3.45	3.35	3.1
	II		5.0	4.7	4.5	4.2	4.1	3.85

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~22.8	25	27	30	32	35	37	39	40.4	44.7	47	50
60m	IV	起重量 Load(t)	12	10.8	9.8	8.7	8.0	7.2	6.7	6.3	6	5.25	4.95	4.55
	II		6										5.7	5.3

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55	57	60
60m	IV	起重量 Load(t)	4.25	3.95	3.75	3.5
	II		5.0	4.7	4.5	4.25

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~22.8	25	27	30	32	35	37	39	40.4	44.7	47	50
55m	IV	起重量 Load(t)	12	10.8	9.8	8.7	8.0	7.2	6.7	6.3	6	5.25	4.95	4.55
	II		6										5.7	5.3

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55
55m	IV	起重量 Load(t)	4.25	3.95
	II		5.0	4.7

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~23.3	25	27	30	32	35	37	40	41.2	45.7	47	50
50m	IV	起重量 Load(t)	12	11.1	10.1	8.9	8.2	7.4	6.9	6.2	6	5.25	5.05	4.65
	II		6										5.8	5.4

载荷表 | Load Diagrams

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~23.8	25	27	30	32	35	37	40	42	45
45m	IV	起重量 Load(t)	12	11.3	10.3	9.1	8.4	7.8	7.1	6.4	6	5.25
	II		6									

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~24.7	25	27	30	32	35	37	40
40m	IV	起重量 Load(t)	12	11.8	10.8	9.5	8.8	7.9	7.4	6.7
	II		6							

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~24.8	25	27	30	32	35
35m	IV	起重量 Load(t)	12	11.9	10.8	9.6	8.9	7.95
	II		6					

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.1~24.9	25	27	30
30m	IV	起重量 Load(t)	12	11.9	10.9	9.6
	II		6			

平衡重配置 | Counter-jib Ballast

长度/Length(m)		平衡重/Counter-weight			
		CA 4200kg	CB 700kg	P 362kg	合计/Tatalkg
70	20.5	5	4	1	24162
65	20.5	5	2	1	22762
60	20.5	5		1	21362
55	18	5	4	1	24162
50	18	5	1	1	22062
45	18	4	2	1	18562
40	18	3	4	1	15762
35	18	3	1	1	13662
30	12	4	5	1	20662



机构配置 | Specifications(Mechanisms)

Q7032	机构代号 mechanism	m/min	t	m/min	t	m	功率/Power Kw
起升 Hoisting	70RCS30	0-20	12	0-40	6	550 >550*	51.5Kw
		0-40	6	0-80	3		
	75LVF30	0-20	12	0-40	6	500 >500* 变频调速 Ferquencycontrol	55Kw
		0-40	6	0-80	3		
变幅 Trolleying	X120K	15-30-60m/min					6Kw
	DVF120	0-60m/min		变频调速 Ferquency control			6Kw
回转 Slewing	RCV185	0-0.7r/min					2X9Kw
	RVF185	0-0.7r/min		变频调速 Ferquency control			2X9Kw
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control			4X3.4Kw
电网 Mains supply		CE138 ICE38				380V(±5%)/50Hz 440V(±5%)/60Hz	
电力容量 Necessary electric power						110KVA	

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂根部节 Counter-jib1		6.52	1.49	1.8	1606	1
2	平衡臂中部节 Counter-jib2		2.7	1.52	1.86	1052	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
3	平衡臂端部节 Counter-jib3		11.1	3.75	3.53	4364	1
4	起升机构 Hoisting		2.66	1.43	2.0	2500	1
5	司机室 Cabin		3.8	1.6	2.6	1032	1
6	根部节 Jib-Section1		10.3	1.54	1.3	2262	1
7	起重臂第二节 Jib-Section2		10.27	1.38	1.21	1790	1
8	起重臂第三节 Jib-Section3		10.27	1.38	1.21	1666	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
9	起重臂第四节 Jib-Section4		5.27	1.38	1.2	751	1
10	起重臂第五节 Jib-Section5		10.27	1.38	1.2	1410	1
11	起重臂第六节 Jib-Section6		5.27	1.38	1.2	797	1
12	起重臂第七节 Jib-Section7		5.25	1.38	1.2	736	1
13	起重臂第八节 Jib-Section8		5.21	1.38	1.17	580	1
14	起重臂第九节 Jib-Section9		5.16	1.38	1.13	395	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
15	起重臂第十节 Jib-Section10		5.15	1.38	1.13	285	1
16	塔头 Towerhead		9.55	1.65	3.02	5285	1
17	回转支承 Slewing Table		3.1	2.5	2.7	4812	1
18	后小车 Rear Trolley		1.98	1.76	1.07	364	1
19	前小车 Front Trolley		2.01	1.76	1.07	424	1
20	吊钩 Hook		1.84	0.28	2.13	869	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
21	套架 Telescoping Cage	 L68B1/2m L68B2/2m	4.38 4.38	4.09 4.09	7.28 7.28	5358 5358	1
22	基础节 Basic Mast	 L68B1/2m L68B2/2m	7.76 7.76	2.13 2.13	2.11 2.11	4355 4355	1
23	标准节 Mast	 L68B1/2m L68B2/2m	3.27 3.27	2.13 2.13	2.11 2.11	1792 1551	12
24	固定支脚 Fixing Angles	 L68B1/2m L68B2/2m	0.58 0.58	0.58 0.58	1.2 1.2	291 291	4
25	底盘基础节 Basic Mast		3.82	2.54	2.54	4418	1
26	底盘斜撑 Chassis Brace		4.45	0.35	0.36	542	4

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
27	横梁 Transom		6.38	0.58	0.79	1123	2
28	纵梁 Carling		7.14	2.51	0.52	2100	1
29	水平斜撑 Horizonal Brace		2.44	0.24	0.24	150	4
30	附着框 Anchorage Frame	 2m	2.75	0.44	3.0	1396	n