尖头塔式起重机

Topkit Tower Crane

Q900-32T

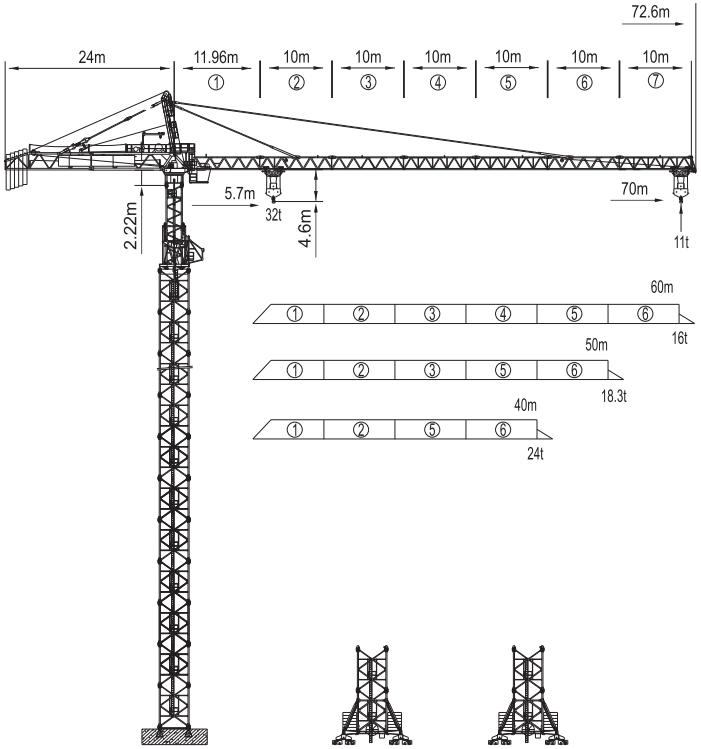

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer the corresponding instructions.

塔身截面 | Masts (4x4x5.78m)

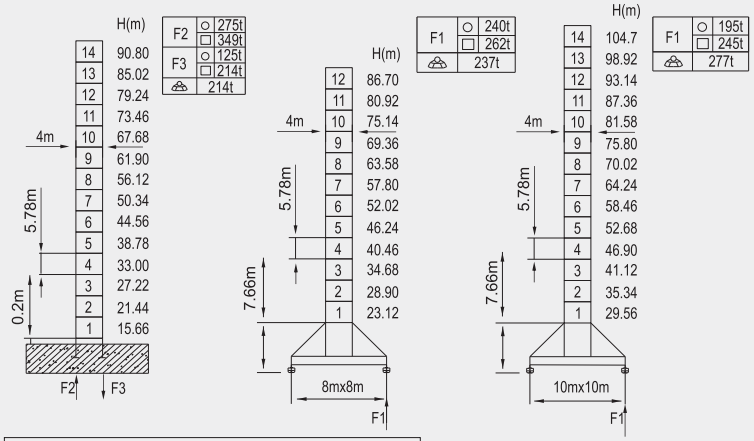

○ 工作状态	○ In service
□ 非工作状态	□ Out of service
空载、无配重	Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

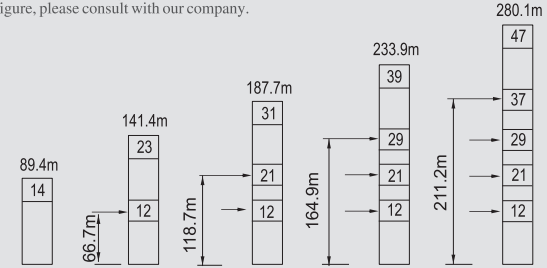

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~28.7	30	35	40	45	50	52.5	55	60	65	70
70m	IV	起重量 Load(t)	32	30.5	25.5	21.7	18.8	16.5	16	14.5	12.9	11.6	10.4
	II		16							15.1	13.5	12.2	11

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~31.2	35	40	45	50	55	57	60
60m	IV	起重量 Load(t)	32	28	24	20.8	18.3	16.2	16	15
	II		16							

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~31.2	35	40	45	50
50m	IV	起重量 Load(t)	32	28	24	20.8	18.3
	II		16				

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~31.2	35	40
40m	IV	起重量 Load(t)	32	28	24
	II		16		

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight			
		CA	CB	CC	合计/ Tatal (kg)
		11400kg	10500kg	8000kg	
70	24	5			57000
60	24	4		1	53600
50	24	3		1	42200
40	24	1	2		32400



机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m	功率/Power
起升 Hoisting	180LVF85	0-18	32	0-36	16	700 >700 ** 变频调速 Ferquency control	132Kw
		0-27	21.2	0-54	10.6		
		0-36	16	0-72	8		
变幅 Trolleying	33DVF26	0-45-65		变频调速 Ferquency control			24Kw
回转 Slewing	50RVF	0-0.55r/min		变频调速 Ferquency control			2X18.5Kw
行走 Traveling	37TVF	0-34m/min		变频调速 Ferquency control			8X3.4Kw
电网 Mains supply	CE138 ICE38			380V(±5%)/50Hz 440V(±5%)/60Hz			
电力容量 Necessary electric power				270KVA			

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂根部节 Counter-jib1		14.54	4.42	7.12	11034	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
2	平衡臂端部节 Counter-jib2		12.1	3.2	3.54	7721	1
3	起升机构 Hoist Mechanism		3.53	2.36	1.76	7072	1
4	司机室平台 Cab Platform		4.4	1.74	1.92	721	1
5	根部节 Jib-Section1		10.68	2.24	2.51	4665	1
6	起重臂第二节 Jib-Section2		10.4	1.9	1.91	4341	1
7	起重臂第三节 Jib-Section3		10.4	1.9	1.91	3815	1
8	起重臂第四节 Jib-Section4		10.4	1.9	1.91	3675	1
9	起重臂第五节 Jib-Section5		10.4	1.9	1.91	3669	1
10	起重臂第六节 Jib-Section6		10.34	1.9	1.87	2715	1
11	起重臂第七节 Jib-Section7		10.27	1.9	1.76	1729	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
12	起重臂端部节 Jib-Nose		0.8	2.24	2.36	295	1
13	塔头 Towerhead		2.12	1.53	8.84	3086	1
14	回转支承 Slewing Table		3.87	4.43	3.92	18945	1
15	内塔身 Inner Mast		12.1	2.59	2.59	11218	1
16	滑动底座 Slide Chassis		4.83	4.83	4.0	13275	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
17	小车（32t） Trolley（32t）		3.16	2.52	1.45	2376	1
18	吊钩（32t） Hook（32t）		2.25	0.4	2.8	1729	1
19	套架 Telescoping Cage		4.91	4.4	6.63	13693	1
20	标准节 R96 Mast R96		4.47	4.47	6.05	4035	1
21	标准节 R97 Mast R97		4.47	4.47	6.05	6036	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
22	标准节 R98 Mast R98		4.47	4.47	6.05	6884	1
23	固定支脚 Fixing Angles		1.0	1.0	1.57	981	1
24	底盘基础节 8mX8m Basic Mast 8mX8m		4.65	4.65	6.0	12239	1
25	底盘斜撑 8mX8m Strut 8mX8m		4.64	0.32	0.44	928	1
26	底盘半片底座 8mX8m Half-bearer 8mX8m		8.7	2.5	0.95	4186	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
27	附着框 Anchorage Frame		5.65	5.65	0.56	4128	n
28	底盘基础节1 10mX10m Basic Mast 10mX10m		4.65	4.65	6.0	10900	1
29	底盘基础节2 10mX10m Basic Mast 10mX10m		4.64	4.64	6.05	11270	1
30	底盘斜撑 10mX10m Strut10mX10m		7.64	0.42	0.4	2130	1
31	底盘半片底座 10mX10m Half-bearer 10mX10m		10.7	3.64	1.2	6528	1