动臂塔式起重机

Luffing Tower Crane

QD4015-6T

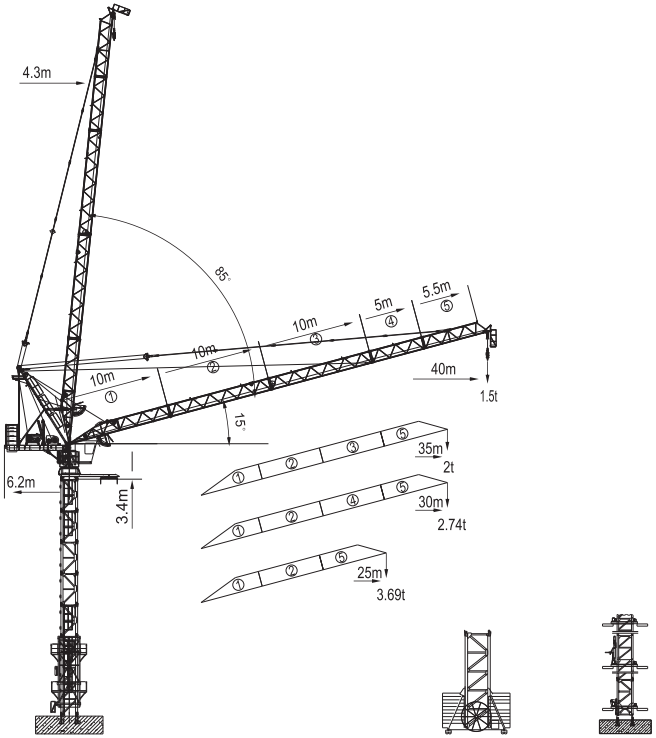

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L46A1 (1.6x1.6x3m)

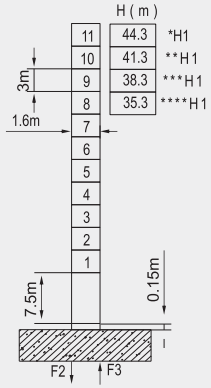

L46A1		
F2	○	81.3t
	□	110t
F3	○	50t
	□	79.2t
		44.5t

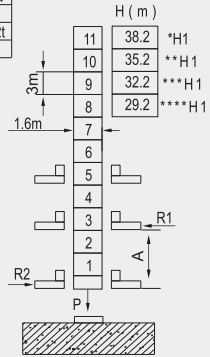

L46A1		
Hmax=183m		
P	63t	63t
A	7m	11m
R1	22.2t	23.1t
R2	19.7t	21.1t
	50t	
L	2.45m	
W	2.38m	
X	2.17m	
X1	1.22m	
Y	1.8m	

内爬框外廓尺寸
Dimension of inner climbing frame



内爬开口尺寸
Dimension of inner climbing hole



H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*25m	**30m	***35m	****40m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

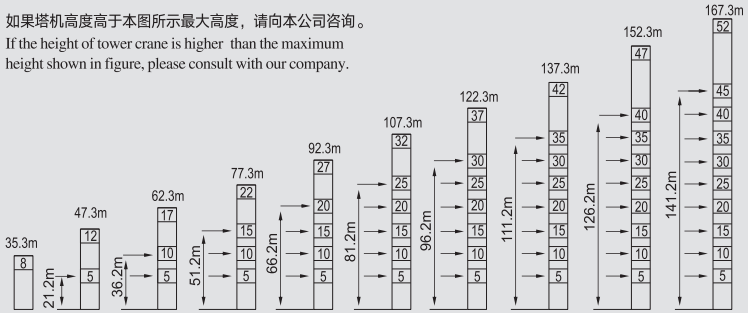

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.3–18.2	20	23	25	28.3	28.7	30	33	35	38	40
40m	VI	起重量 Load(t)	6	5.24	4.31	3.69	3.0	2.92	2.66	2.21	1.92	1.57	1.44
	IV		3.0						2.74	2.29	2.0	1.63	1.5

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.3–18.2	20	23	25	28.3	28.7	30	33	35
35m	VI	起重量 Load(t)	6	5.24	4.31	3.69	3.0	2.92	2.66	2.21	1.92
	IV		3.0						2.74	2.29	2.0

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.3–18.2	20	23	25	28.3	28.7	30
30m	VI	起重量 Load(t)	6	5.24	4.31	3.69	3.0	2.92	2.66
	IV		3.0						2.74

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.3–18.2	20	23	25
25m	VI	起重量 Load(t)	6	5.24	4.31	3.69
	IV		3.0			

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight			合计/Tatal(kg)
		CA	CB	CC	
		4000kg	3000kg	2000kg	
40	6.2	1	2	2	14000
35	6.2	1	1	3	13000
30	6.2	1	2	1	12000
25	6.2	1	1	2	11000



机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m	功率/Power Kw
起升 Hoisting	30LVF15	0-20	6	0-40	3	400	22Kw
		0-40	3	0-80	1.5		
拉臂 Luffing	33DVF25	≤3min		变频调速 Ferquency control			24Kw
回转 Slewing	RCV120A	0-0.7r/min					6Kw
	RVF120A	0-0.7r/min		变频调速 Ferquency control			6Kw
行走 Traveling	14TVF	0-25m/min		变频调速 Ferquency control			2X5.2Kw
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power							78KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		6.33	3.4	3.75	5112	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
2	根部节 Jib Section 1		10.19	1.2	1.37	1186	1
3	第二节 Jib-Section 2		10.17	1.2	1.22	769	1
4	第三节 Jib-Section 3		10.11	1.19	1.22	693	1
5	第四节 Jib-Section 4		5.28	1.19	1.22	361	1
6	端部节 Jib-Section 6		6.57	1.19	1.45	760	1
7	塔头 Towerhead		5.26	1.77	7.57	2378	1
8	缓冲装置 Buffer		2.79	1.64	0.36	585	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
9	回转支承 Slewing Table		5.96	4.12	3.18	4961	1
10	吊钩 Hook		0.97	0.27	1.22	277	1
11	套架 Telescoping Cage		3.63	3.63	6.8	3807	1
12	基础节 Basic Mast		7.75	1.75	1.69	2688	1
13	标准节 Mast		3.25	1.75	1.69	1207	8
14	固定支脚 Fixing Angles		0.49	0.49	1.14	182	4
15	附着框 Anchorage Frame		2.4	0.41	2.51	1110	n